

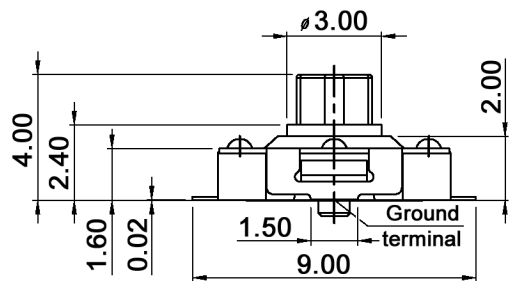

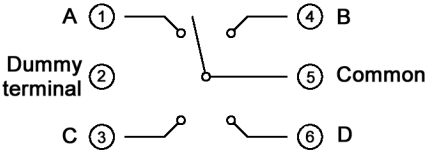




DIAGRAM CIRCUIT

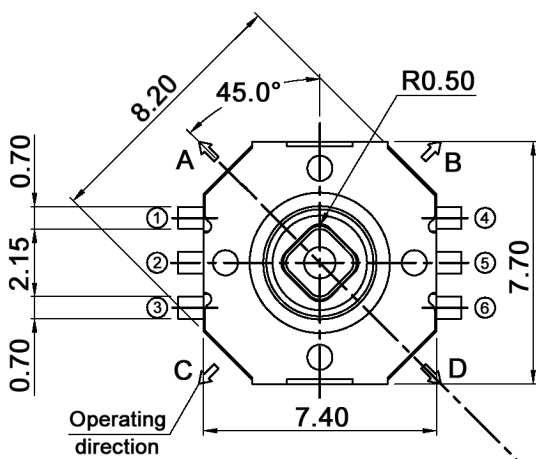

1.40 max.
Fitting margin
for key top

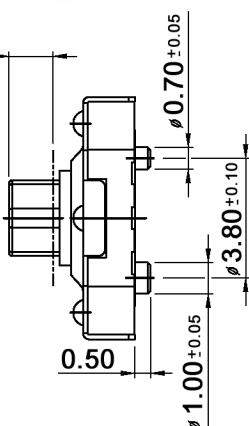

P.C.B. LAYOUT

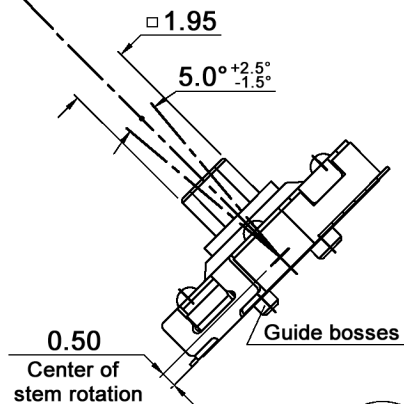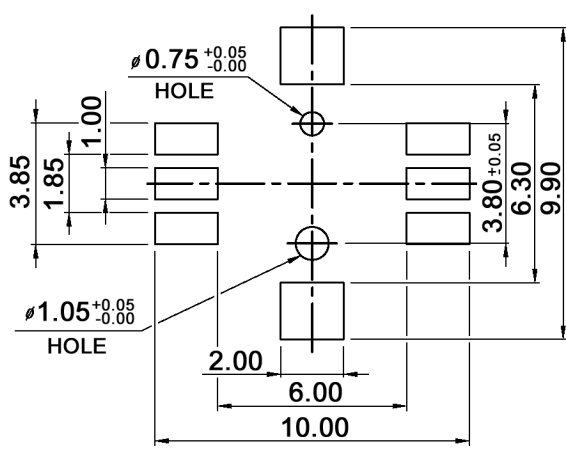

Tolerances: max. ±0.20mm			Date	Name	TSSJ 4		
			09/05	dr			
			knitter-switch		30 06 98		Page
							1/2
Modifications	Date	Name					

Specifications:

Contact rating: 50mA, 12V DC
Contact resistance: 100mOhm max.
Insulation resistance: 100MOhm min.
Dielectric strength: 250V AC (50 or 60 Hz) for 1 minute
Operating temperature: -20°C to +70°C
Storage temperature: -40°C to +85°C
Operating force: 4 directions: 160 +/-50g
Mechanical life: 100 000 cycles min.
Soldering temperature: peak 255°C / max. 10sec., >250°C
Material: Cover: C7701RH
Stem: high-temp. thermoplastic LCP
Contact: SUS301CSP-EH
Termianl: C5210R-H, with silver plated
Base: high-temp. thermoplastic LCP, black



Tolerances: max. ±0.20mm			Date	Name	TSSJ 4		
			09/05	dr			
					knitter-switch		Page
							2/2
Modifications	Date	Name					