



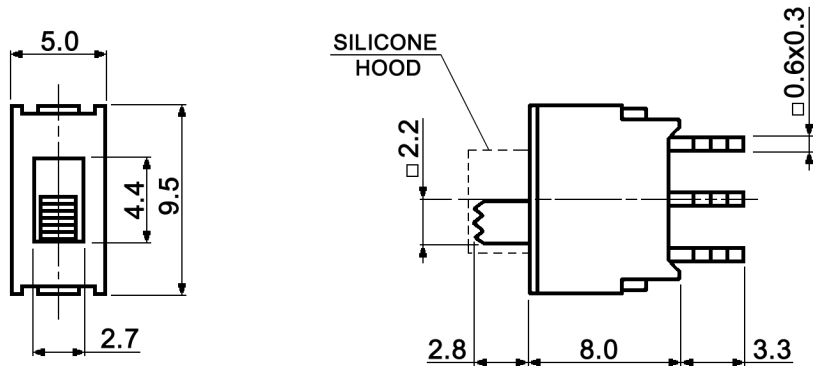

P.C. MOUNTING

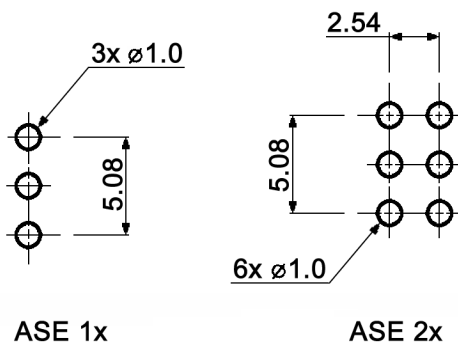

x	Switch function
D	on - on
E	on - off - on

The closed contacts correspond to the slide position.

Specifications:

Contact rating:	max. 50mA, 0.4VA; max. 48V AC/DC min. 1µA, 20mV AC/DC
Cotact resistance:	50Ohm max.
Insulation resistance:	500Mohm min. at 250V DC
Dielectric strength:	500V, 50Hz for the duration of 1 minute
Operating temperature:	-20°C to +85°C
Mechanical life:	min. 60 000 cycles
Soldering conditions:	auto-soldering: max.: 260 +/-5°C, 5 +/-1sec.
Mounting:	on pc-board
Material:	Contacts: phosphor bronze, gold plated over nickel barrier Terminals: PC terminals, crimped, phosphor bronze, gold plated over nickel barrier Case: PBT, meets UL94V-0, washable Metal parts: nickel plated brass

UL file number:

E140532



Tolerances:			Date	Name	ASE 1 x / ASE 2 x	
			08/09	dr		
					knitter-switch	
					20 25 56	
Modifications	Date	Name				Page
						1/1