

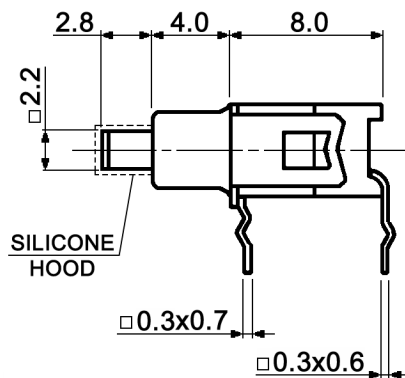
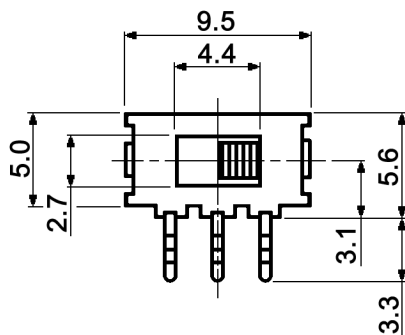


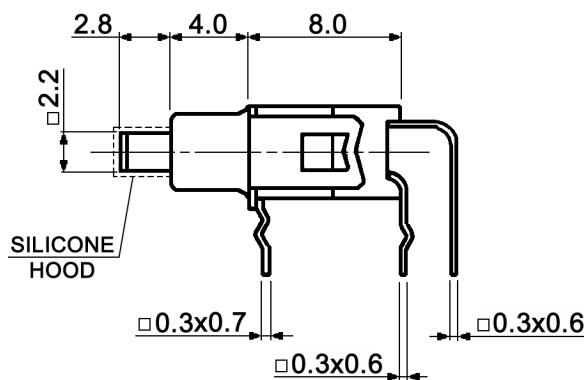


ASE 1 x-RA

P.C. MOUNTING



ASE 2 x-RA

P.C. MOUNTING

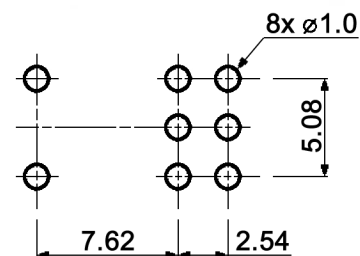

Specifications:

Contact rating: max. 50mA, 0.4VA; max. 48V AC/DC
min. 1µA, 20mV AC/DC
Contact resistance: 50Ohm max.
Insulation resistance: 500Mohm min. at 250V DC
Dielectric strength: 500V, 50Hz for the duration of 1 minute
Operating temperature: -20°C to +85°C
Mechanical life: min. 60 000 cycles
Soldering conditions: auto-soldering: max.: 260 +/-5°C, 5 +/-1sec.
Mounting: on pc-board
The cap can be removed after washing

Material: Contacts: phosphor bronze, gold plated over nickel barrier
Terminals: PC terminals, crimped, phosphor bronze, gold plated over nickel barrier
Case: PBT, meets UL94V-0, washable
Metal parts: nickel plated brass

UL file number:

E140532

x	Switch function		
D	on	-	on
E	on	-	off - on

The closed contacts correspond to the slide position.



Tolerances:			Date	Name
			08/09	dr
Modifications	Date	Name		

ASE 1 x-RA / ASE 2 x-RA

knitter-switch

30 17 01

Page

1/1