


Dual-in-line Switches end-stackable




Specifications:

Contact rating:	24 V DC, 25 mA
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	500 V AC (50 Hz or 60 Hz) for 1 minute
Operating temperature:	– 20° to + 85° C
Mechanical life:	minimum 2000 operations per pole
Material:	cover/base: high-temp. PA-9T UL 94 V-0, black; actuator: LCP UL 94 V-0, white
Contact:	copper; gold-plated at contact area
Terminal:	brass, gold-plated
Construction:	case sealed
	series SBS 5000: slide recessed, front sealed with protective tape
Mounting:	on pc-board – SMD
Slide position:	OFF

Models:


Series SBS 5000

Type	Poles	Length (A)
SBS 5002 T	2	4,98 mm
SBS 5004 T	4	10,06 mm
SBS 5006 T	6	15,14 mm
SBS 5008 T	8	20,22 mm
SBS 5010 T	10	25,30 mm

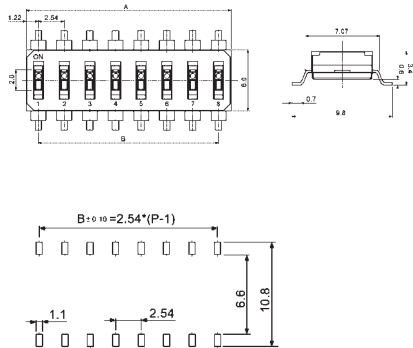

Series SBS 5100

Type	Poles	Length (A)
SBS 5102 T	2	4,98 mm
SBS 5104 T	4	10,06 mm
SBS 5106 T	6	15,14 mm
SBS 5108 T	8	20,22 mm
SBS 5110 T	10	25,30 mm

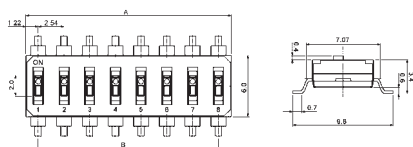

Packing:	on tapes		
Type	Tape	Reel	Tape width (A)
SBS 5002 T	900 pieces;	Ø 300 mm	16,0 mm
SBS 5004 T	900 pieces;	Ø 300 mm	24,0 mm
SBS 5006 T	900 pieces;	Ø 300 mm	24,0 mm
SBS 5008 T	900 pieces;	Ø 300 mm	32,0 mm
SBS 5010 T	900 pieces;	Ø 300 mm	44,0 mm
SBS 5102 T	900 pieces;	Ø 300 mm	16,0 mm
SBS 5104 T	900 pieces;	Ø 300 mm	24,0 mm
SBS 5106 T	900 pieces;	Ø 300 mm	24,0 mm
SBS 5108 T	900 pieces;	Ø 300 mm	32,0 mm
SBS 5110 T	900 pieces;	Ø 300 mm	44,0 mm