

Subminiature Rotary Coded Switches for SMT




Specifications:



Contact rating:	24 V-, 25 mA ss
Contact resistance:	< 80 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-20° to +70° C
Storage temperature:	-40° to +85° C
Mechanical life:	minimum 10 000 operations
Terminals:	phosphor bronze, gold-plated over nickel barrier
Material:	case: PA6T black meets UL 94 V-0 rotor: PA 66 grey, inverse type beige
Mounting:	on pc-board
Packaging:	600 pcs/reel

Models Code

SMR 60010	BCD
SMR 60110	BCD Inverse
SMR 60016	Hexadezimal
SMR 60116	Hexadezimal Inverse

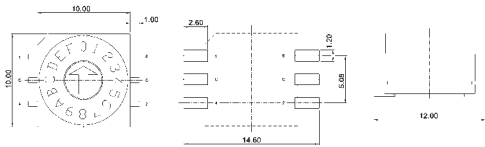

SMR 61010	BCD
SMR 61110	BCD Inverse
SMR 61016	Hexadezimal
SMR 61116	Hexadezimal Inverse

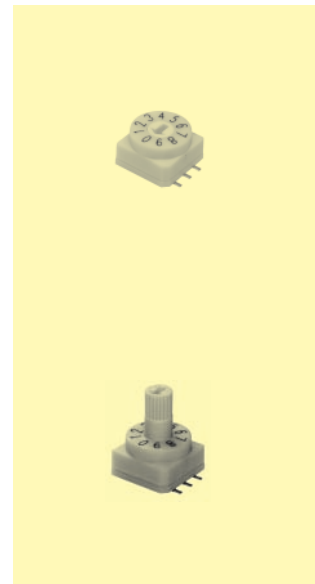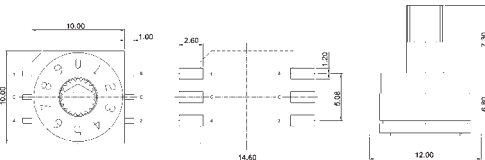

Special versions on request