
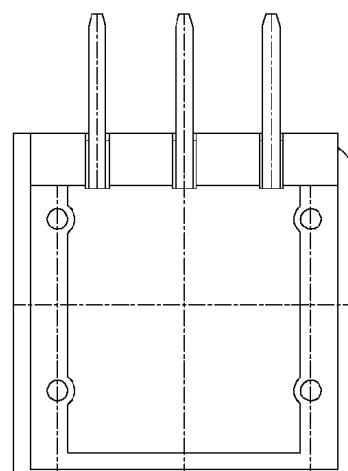
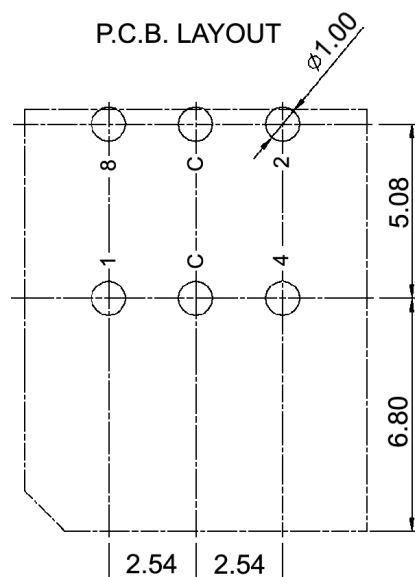
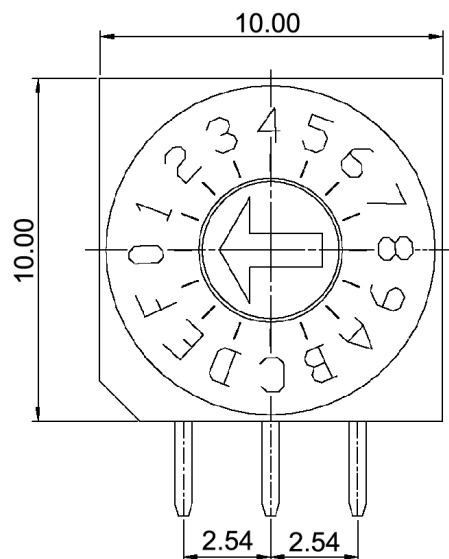


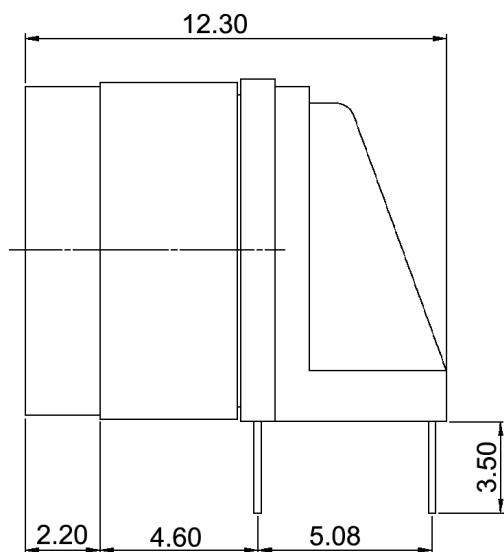

Specifications:

Contact rating:	switching: 15mA, 24V DC non-switching: 100mA, 50V DC
Contact resistance:	80mOhm max.
Insulation resistance:	100MOhm min.
Mechanical life:	10 000 cycles
Operating force:	700gf max.
Operating temperature:	-40°C to +85°C
Storage temperature:	-40°C to +85°C
Soldering conditions:	pre-heat: max. 120°C, max. 70sec. wave soldering: max. 260°C, max. 10sec.
Color of actuator:	ivory
IP rating:	IP67

Hexadecimal inverse

	Complement coded				
	C	1	2	4	8
0	•	•	•	•	•
1	•		•	•	•
2	•	•		•	•
3	•			•	•
4	•	•	•		•
5	•		•		•
6	•	•			•
7	•				•
8	•	•	•	•	
9	•		•	•	
A	•	•		•	
B	•			•	
C	•	•	•		
D	•		•		
E	•	•			
F	•				



Tolerances: $\leq 10\text{mm}$: $\geq 10\text{mm}$:			Date	Name
			08/07	dr
Soldering conditions	01/11	dr		
IP rating	06/09	dr		
Operating temperature	11/08	dr		
Temperatures	01/08	dr		
Modifications	Date	Name		

DRR 60116

30 11 98

knitter-switch

Page

1/1