



P.C. LAYOUT

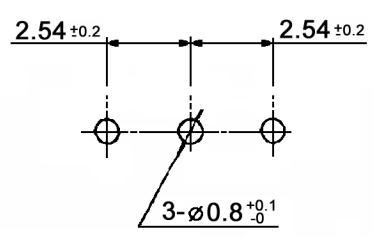

Specifications:

- Contact rating:** 0.5A, 12V DC; 0.3A, 24V (AC/DC)
min. current: 1mA/10mV AC/DC
- Contact resistance:** 30mOhm max.
- Insulation resistance:** 10MOhm min. at 500V DC
- Dielectric strength:** 500V AC for 1 minute
- Operating temperature:** -40°C to +85°C
- Storage temperature:** -40°C to +85°C
- Mechanical life:** 1000 cycles
- Electrical life:** 1000 cycles
- Operating force:** 800gf max.
- Soldering conditions:** 270°C, 5sec.
- Humidity test:** Test conditions: measured 1 hour after exposure to ambient, after 96 hours exposure at 40 +/- 2°C, 90-95%R.H
Insulation resistance: 10MOhm min. at 500V DC
Dielectric strength: 500V AC for 1 minute
- Saline spray test:** 24 hours
- Material:** Case / slide: glass fiber reinforce polyamide (UL94V-0), black
Terminal and all contact parts: 0.05µm gold plated over 0.2µm nickel
Slider: colour red

SWITCH POSITION



Tolerances:	Date	Name
		05/06
Contact rating	04/13	dr
Material	09/12	dr
Revised	02/11	dr
Mechanical life	07/07	dr
Modifications	Date	Name

MMP 1010 D-1

knitter-switch

30 09 03

Page
1/1