

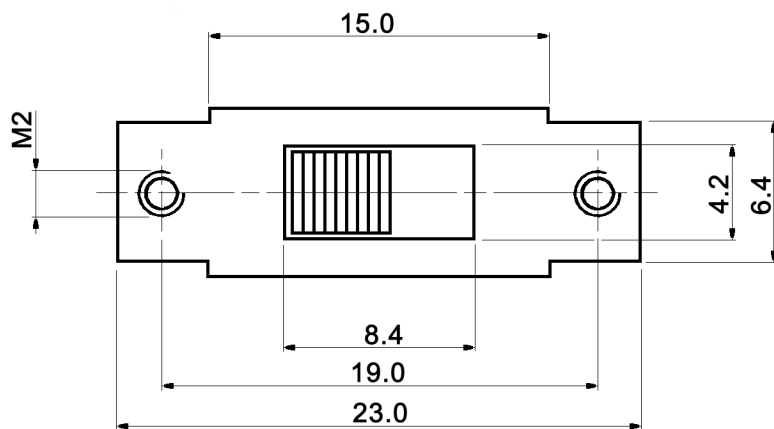
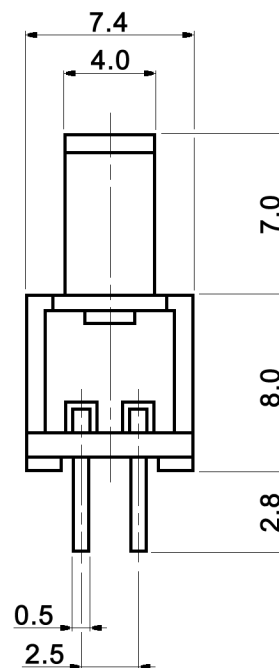


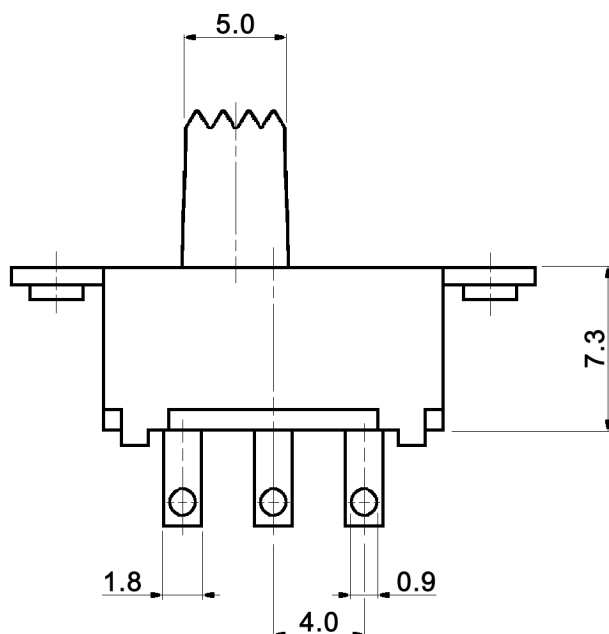

SCHEMATIC



Specifications:

Contact rating:	350mA, 30V DC
Contact resistance:	20mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	500V, 50Hz for the duration of 1 minute
Operating temperature:	-20°C to +85°C
Mechanical life:	min. 10 000 cycles
Soldering conditions:	hand-soldering: max.: 270°C, 5sec.
Switching function:	on - on
Timing:	non-shorting
Material:	Contacts: copper alloy, silver plated over nickel barrier

x	Button color
SW	black
RT	red



Tolerances:			Date	Name
			08/09	dr
Modifications	Date	Name		

MFS 201 N x

knitter-switch

30 18 96

Page

1/1