



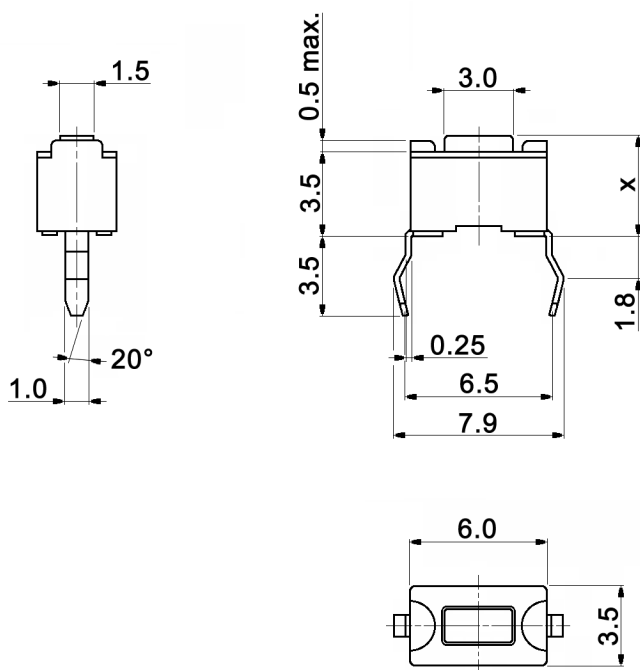

P.C. LAYOUT

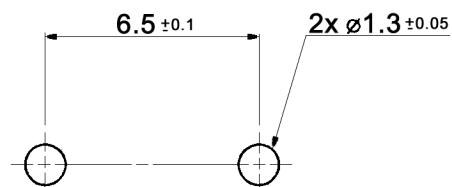

x	Height	y	Operating force	Color of stem	Electrical life
1	4.3mm	N	160 +/-50gf	brown	50 000 cycles
2	5.0mm	R	260 +/-50gf	red	30 000 cycles
		S	320 +/-80gf	salmon	50 000 cycles
		Y	520 +/-130gf	yellow	30 000 cycles

Specifications:

Contact rating:	50mA, 12V DC
Contact resistance:	100mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	250V, 50Hz for the duration of 1 minute
Operating temperature:	-25°C to +70°C
Soldering conditions:	hand-soldering: max.: 320°C, 2sec., 30W auto-soldering: max.: 260°C, 5sec.
Travel:	0.25 +0.2/-01.mm
Mounting:	on pc-board
Packaging unit:	135 pcs. / tube
Material:	Contacts: stainless steel, silver plated Terminals: brass, silver plated Cover: stainless steel Base / stem: high-temp. nylon meets UL94V-0



Tolerances:			Date	Name	TS 3x y				
			08/09	dr					
			knitter-switch			20 26 35			Page
Table "y"	09/11	dr							1/1
Revised	08/09	dr							
Modifications	Date	Name							