


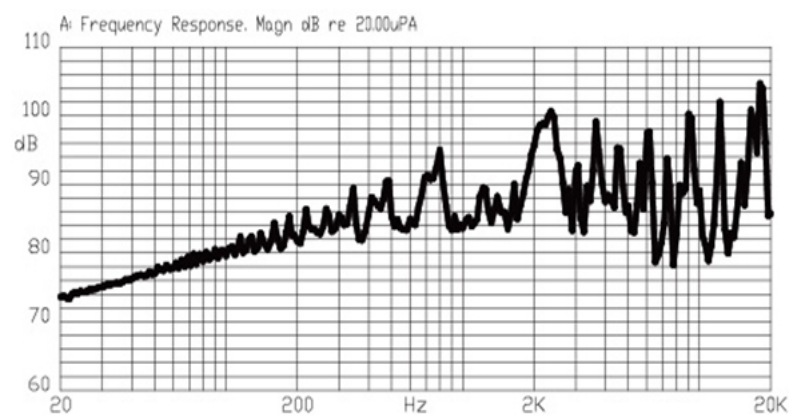

You are here: [Home](#) ▶ [Piezo Buzzer](#) ▶ [Piezo Transducer](#) ▶ [Pin](#) ▶ [KPEG116](#)

KPEG116

[Print](#)


Additional Info

| | |
|-------------------------------------|--|
| Rated Frequency (Hz): | 2,000 |
| Rated Voltage (Vp-p / VDC): | Max 30 |
| Current Consumption (mA): | Max. 8@10Vp-p, Square Wave, 2.0KHz |
| Sound Pressure Level (dB): | Min 90dB@10cm/10Vpp, Square Wave, 2.0KHz |
| Electrostatic Capacity (pF): | 28,000 +/- 30% @ 1KHz/1V |
| Operating Temperature (°C): | -30 ~ + 85 |
| Storage Temperature (°C): | -40 ~ + 95 |
| Dimension (mm): | Φ30.0x10.0 |

[Like](#) [Sign Up](#) to see what your friends like.

Tagged under [10Vpp Transducer Pin Piezo 2KHz](#)

More in this category: [« KPEG112](#) [KPEG114 »](#)

[back to top](#)

Best view with [Microsoft Internet Explorer 9](#) or above, [Mozilla Firefox](#) or [Google Chrome](#).

版權所有 © 2018 志豐電子 251新北市淡水區中正東路2段69-11號10樓 Tel :+886-2-2809-5651 info@kingstate.com.tw
Copyright © 2018 Kingstate Electronics Corp. 10F, No. 69-11, Sec.2, JhongJheng E. Rd., Damshui Dist, New Taipei City 251, Taiwan