
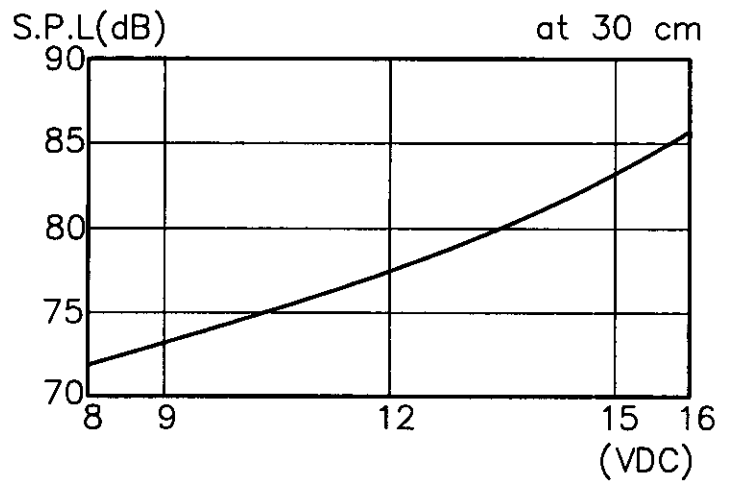


Tolerance: ±0.5mm

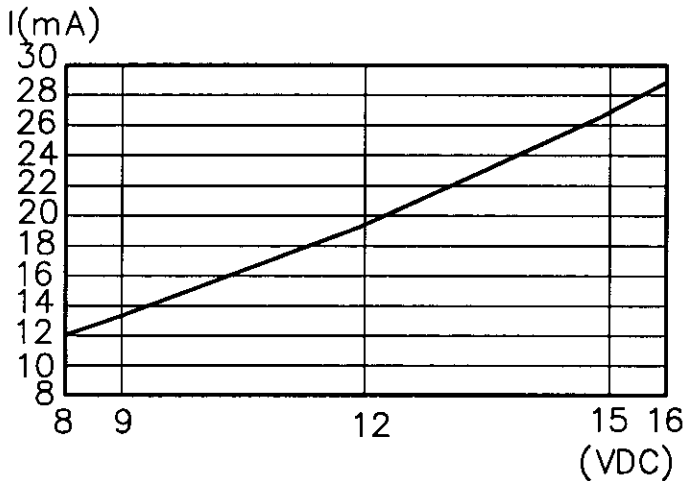

Operating Voltage (VDC)	8~16
Current Consumption at 12VDC (mA, maximum)	30
Sound Pressure Level at 30cm/12VDC (dB, minimum)	77
Tone	Continuous
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-30~+70
Weight (Gram)	8.5

Environmental Protection Regulation

KS-Q-R-054 (RoHS)



**KINGSTATE  
ELECTRONICS**

<http://www.kingstate.com.tw>

<b>TITLE</b> ELECTRONIC SOLID STATE AUDIO INDICATOR			
<b>APPROVALS</b>	<b>DATE</b>	<b>PART NO.</b>	KSG8412
DRAWING Tracy	032906'		
<b>CHECKED</b> <i>Walter</i>	040706'	<b>DRAWN NO.</b>	POD-2558
<b>APPROVED</b> <i>Paddy</i>	040506'		
三角法	<b>SCALE</b> 1:1	<b>MATERIAL</b>	ABS
Unit: mm	<b>SHEET</b> 1 OF 1		