





**D-SUBMINIATURE CONNECTORS:**  
**K42X Series**  
 High Density Dual-Port D-Sub Combo

**K42X-E9P/E15S-A4N Dimensions**  
 Dimensions in mm

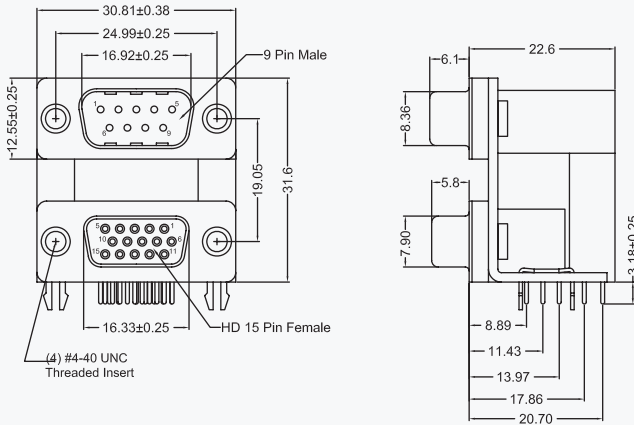

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

<input type="text"/>	-	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series		Top Shell Size	Bottom Shell Size	Center Distance	Boardlock Option	Jackscrews Option

**Series**

**K42X** - High Density Dual-Port D-Subminiature Connector

**Top/Bottom Shell Size**

**B25S/E15S** - 25 Contact Receptacle over 15 Contact Receptacle

**E9P/E15S** - 9 Contact Plug over 15 Contact Receptacle

**E9S/E15S** - 9 Contact Receptacle over 15 Contact Receptacle

**E9P/E15SV** - 9 Contact Plug over 15 Contact VESA Receptacle

**Center to Center Distance**

**A** - 0.750" (Standard)

**Boardlocks Option**

**4N** - Boardlocks (Standard)

**Jackscrews Option**

**Blank** - No Jackscrews

**J** - #4-40 Jackscrews Installed

Contact Kycon for Other Options