

## UNIVERSAL SERIAL BUS: KUSBVX Series

### Vertical Top Entry USB 3.0

#### Product Features

Also Known as SuperSpeed USB  
 Vertical Top Entry, Through Hole Termination  
 A Type Available  
 Meets USB-IF 3.0 Specifications  
 Backwards and Forward Compatible to USB 2.0 Products  
 CSA/NRTL Certified File No. LR78160

#### Performance Specifications

##### Materials and Finish

**Insulator**  
 PBT+30%GF Thermoplastic, UL 94V-0 Rated, Blue Color

##### Contact A(4 Pin)

Phosphor Bronze

##### Contact B(5 Pin)

Brass

##### Plating

30µ" Gold Plating over Nickel on Contact area,  
 Tin Plating on Solder Tail

##### Shell

Brass, Nickel Plated

#### Mechanical Characteristics

**Insertion Force:** 2.57kg Max.

**Extraction Force:** 1.0-2.5kg Min.

**Durability:** 5000 Cycles Min.

**Operating Temperature:** See Drawing

#### Electrical Characteristics

**Rated Current:** 1.8A

**Insulation Resistance:** 1000 Megohms

**Contact Resistance:** 50 milliohms Max

**Dielectric Withstanding Voltage:** 100V AC for 1 Minute

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

#### Generated Part Number

#### Part Number Builder



#### Series

**KUSBVX** - Vertical Top Entry Universal Serial Bus

#### Type

**BS1N9** - B Type, 9 Pins

#### Insulator Color Option

**BL** - Blue




#### Plating Option

**30** - 30µ" Gold Plating

Contact Kycon for other options

### KUSBVX-BS1N9-BL30

Dimensions in mm

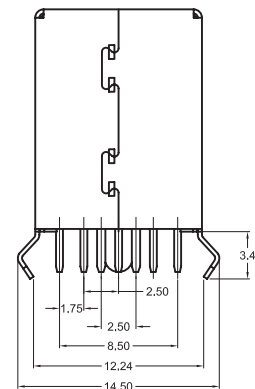

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND
5	StdB_SSTX-
6	StdB_SSTX+
7	GND-DRAIN
8	StdB_SSRX-
9	StdB_SSRX+