


RoHS



GWLGX Series Right Angle Ganged Modular Jack with LED, Tab up

Features

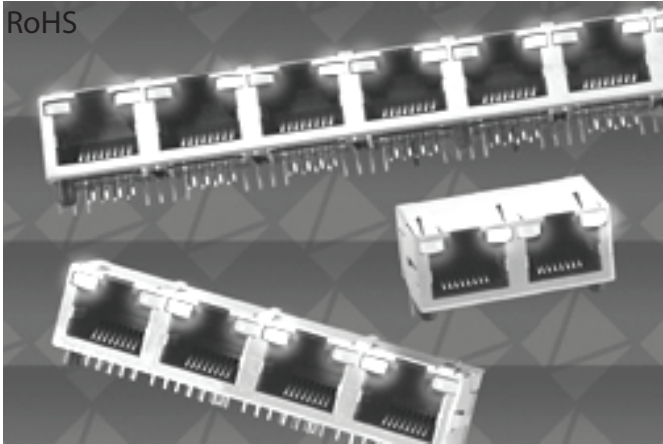

- Easy Viewing LEDs to act as Power/Transmit Indicators
- Snap-In Retention Tabs
- Available Fully Shielded for EMI/RFI Protection
- CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing Material

Thermoplastic, UL94V-0 Rated, Black Color

Shield Material

Copper Alloy, Nickel Plated

Contact Material

Phosphor Bronze

Electrical Characteristics

Insulation Resistance

500 Megohms min.

Voltage Rating

150V AC

Contact Resistance

20 milliohms max.

Current Rating

1.5 Amps


MODULAR JACKS & PLUGS

GWLGX Series

Documentation & Ordering Information

Kycon Part #

Part Number Builder

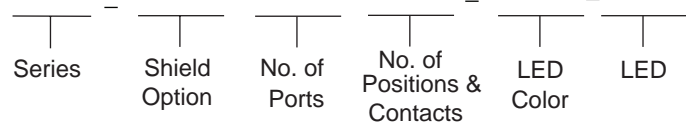

Series

GWLGX - Ganged Modular Jack with LED, Tab up

Shield Option

S1 - Fully Shielded with Top and Side Grounding Tabs

No. of Ports and Led Color Option

No. of Ports	Led Color								
	NO of Positions and contacts								
	G/G	Y/Y	Y/G	G/Y	G/R	R/G	GY/GY	GR/GR	YG/YG
2	88	88	88	88	88	88	88	88	88
4	88	88	88	88	88	88	88	88	88
6	-	-	88	88	-	-	-	-	-
8	88	88	88	88	88	88	88	88	88

50 - 50µ" Gold Plating

LED Color*

G/G - LED 1: Green, LED 2: Green

Y/Y - LED 1: Yellow, LED 2: Yellow

Y/G - LED 1: Yellow, LED 2: Green

G/Y - LED 1: Green, LED 2: Yellow

G/R - LED 1: Green, LED 2: Red

R/G - LED 1: Red, LED 2: Green

GY/GY - LED 1: Green/Yellow, LED 2: Green/Yellow

GR/GR - LED 1: Green/Red, LED 2: Green/Red

YG/YG - LED 1: Yellow/Green, LED 2: Yellow/Green

Plating Option

Blank - Standard

50 - 50µ" Gold Plating

* Contact Factory for other LED Options