



**AUDIO JACKS: STX-35398 Series**  
Mid-Mount 3.5mm Audio Jack

**Product Features**

Offered in a 3-Pole Version with Switch  
Used in Devices Such as Audio Equipment, Cell Phones,  
or Digital Still Camera  
Complies with EIA Standards  
CSA/NRTL Certified File No. LR78160

**Performance Specifications**

**Materials and Finish**

**Housing**

High Temperature Thermoplastic, UL 94V-0 Rated

**Terminals**

Copper Alloy, Gold Plated

**Electrical Characteristics**

**Contact Resistance**

**Before Durability Test**

50 milliohms Max.

**After Durability Test**

100 milliohms Max.

**Insulation Resistance**

100 Megohms Min. at 500V DC

**Dielectric Withstanding Voltage**

500V AC RMS for 1 Minute

**Operating Temperature**

-25°C to + 85°C

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

Series   
  Option   
 -   
  Number of Pins   
  Threading Option   
  Packaging

**Series**

STX-35398 - Mid-Mount 3.5mm Audio Jack

**Option**

A - Through Hole and SMT Contacts with Barrel  
E - Through Hole Contacts without Barrel

**Number of Pins**

5 - Pins

**Threading Option**

N - Non-Threaded Barrel


**Packaging**

TR - Tape and Reel

Contact Kycon for other options

**STX-35398**

Dimensions in mm

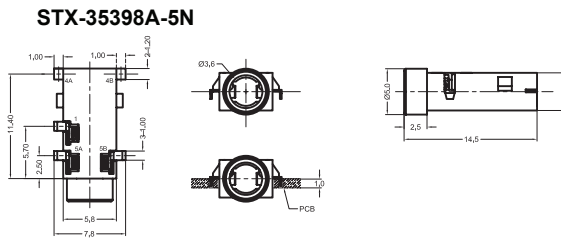

**STX-35398E-5N**

