
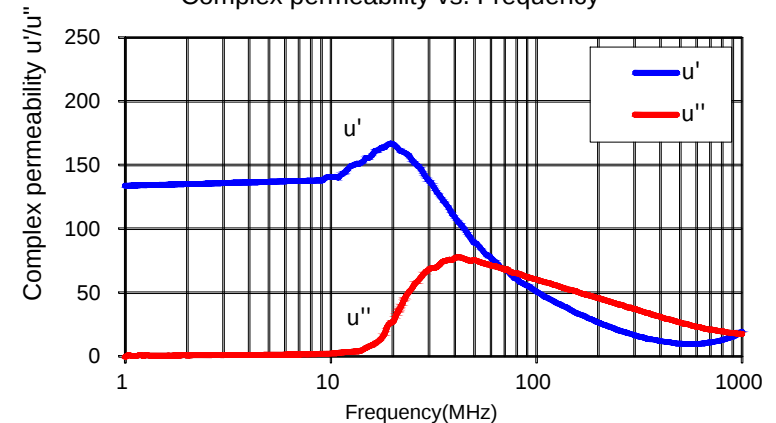


**UNCONTROLLED
DOCUMENT**

A	120.0[4.724]	$\frac{+}{-}$	2.00[.0787]
B	60.0[2.362]	$\frac{+}{-}$	2.00[.0787]
C	0.20[.008]	$\frac{+}{-}$	0.02[.0008]
D	0.35[.014]		MAX

RoHS

Initial Permeability(u') (13.56MHz)	150±20%
Initial Permeability(u'') (13.56MHz)	5 Max

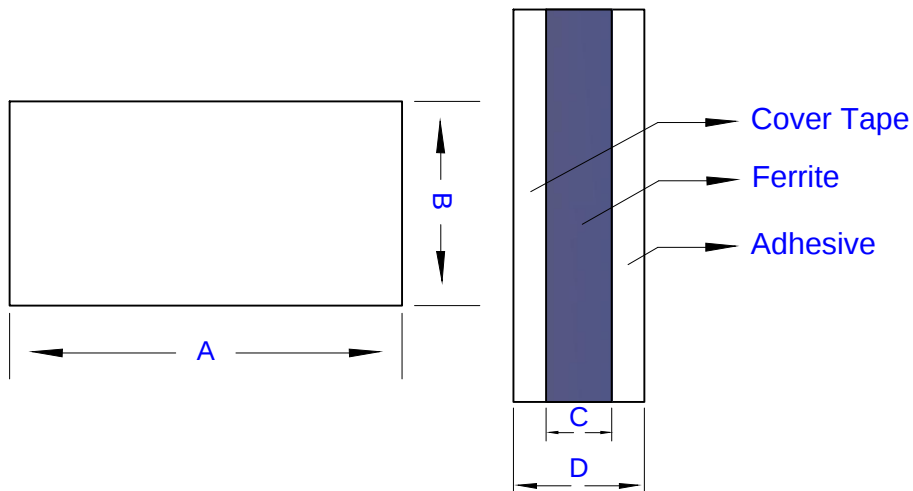

MEASURED BY ANGILENT E4991A , 1Ts .

1. OPERATING TEMPERATURE RANGE -40°C TO 85°C .
2. FLEXIBLE FERRITE SHEET.
3. D IS MEASURED AFTER REMOVING PAPER LINER OF ADHESIVE

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
				PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:
				MULL12060-000		A	CO-FIRE	QU
				DATE: 10/08/14		SCALE: NTS		SHEET: 1 of 1
A	ORIGINAL DRAFT		10/08/14	QU	CAD #	TOOL # -		
REV	DESCRIPTION		DATE	INT	MULL12060-000-A			