


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------|---------|-------------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 1/11/18 | D.FRISIELLO |
| | | | |
| | | | |

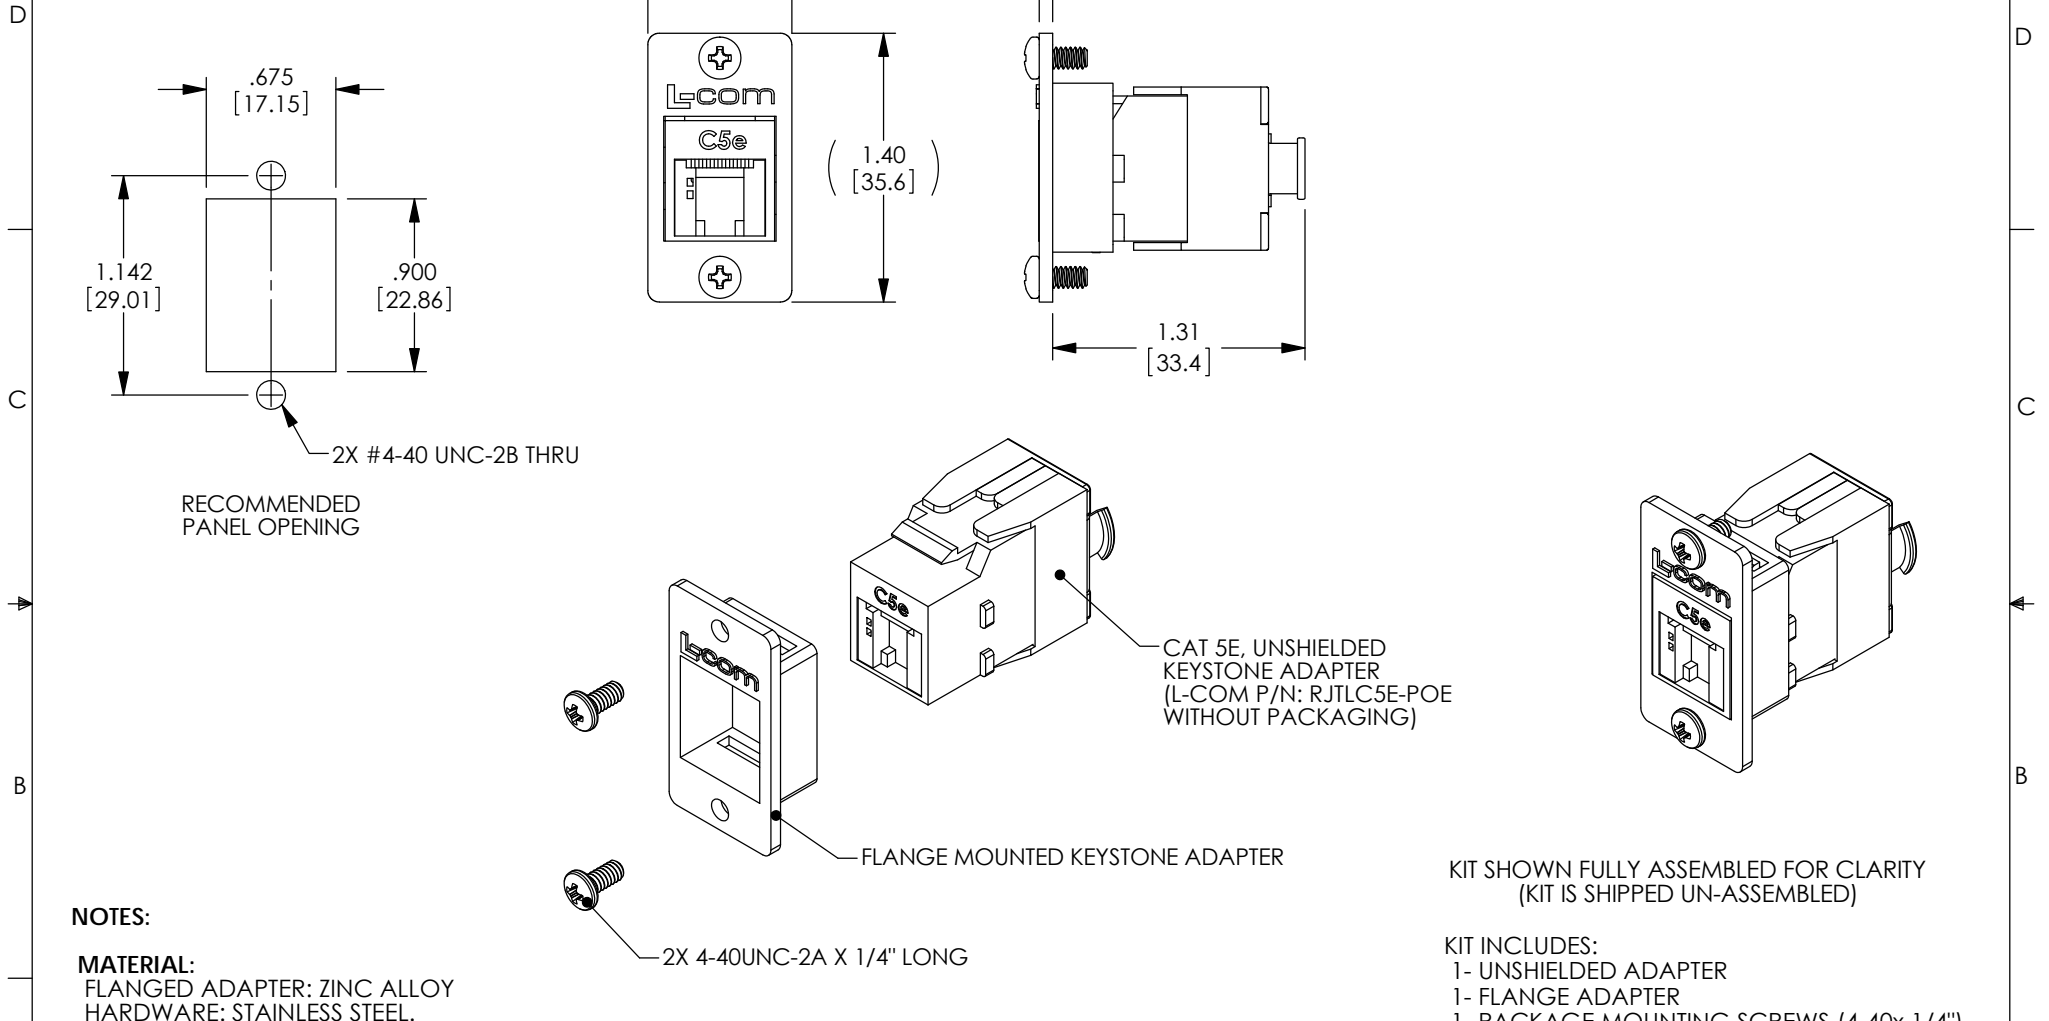

NOTES:

MATERIAL:
 FLANGED ADAPTER: ZINC ALLOY
 HARDWARE: STAINLESS STEEL.

FINISH:
 FLANGED ADAPTER: NICKEL PLATE.

MISCELLANEOUS:
 DC CURRENT RATING: 1.5 AMPS

PACKAGING:
 KIT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

CAT 5E, UNSHIELDED KEYSSTONE ADAPTER (L-COM P/N: RJTLC5E-POE WITHOUT PACKAGING)

FLANGE MOUNTED KEYSSTONE ADAPTER

2X 4-40UNC-2A X 1/4" LONG

KIT SHOWN FULLY ASSEMBLED FOR CLARITY (KIT IS SHIPPED UN-ASSEMBLED)

KIT INCLUDES:
 1- UNSHIELDED ADAPTER
 1- FLANGE ADAPTER
 1- PACKAGE MOUNTING SCREWS (4-40x 1/4")

| | | | | | | |
|---|--|-----------------|---|------------------|--|---------------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.27] | APPROVALS D.FRISIELLO | DATE 1/11/18 | | | 50 HIGH STREET NORTH ANDOVER, MA 01845 | |
| | CHECKED BY D.GUITADAURO | 1/11/18 | CATEGORY TELECOM / MODULAR | | | |
| | APPROVED BY D.GUITADAURO | 1/11/18 | PRODUCT DESCRIPTION ECF C5e KSJ RJ45/TL PoE+ | | | |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | | COLOR VARIATIONS MAY OCCUR | SIZE A | FSCM NO. 43321 | DWG. NO. ECFRJTL5E-POE |
| PROJECTION | SCALE: NONE | | CAD FILE: ECFRJTL5E-POE.SLDDRW | SHEET 1 OF 1 | | |