


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	02/15/2019	DGUTTADAUR

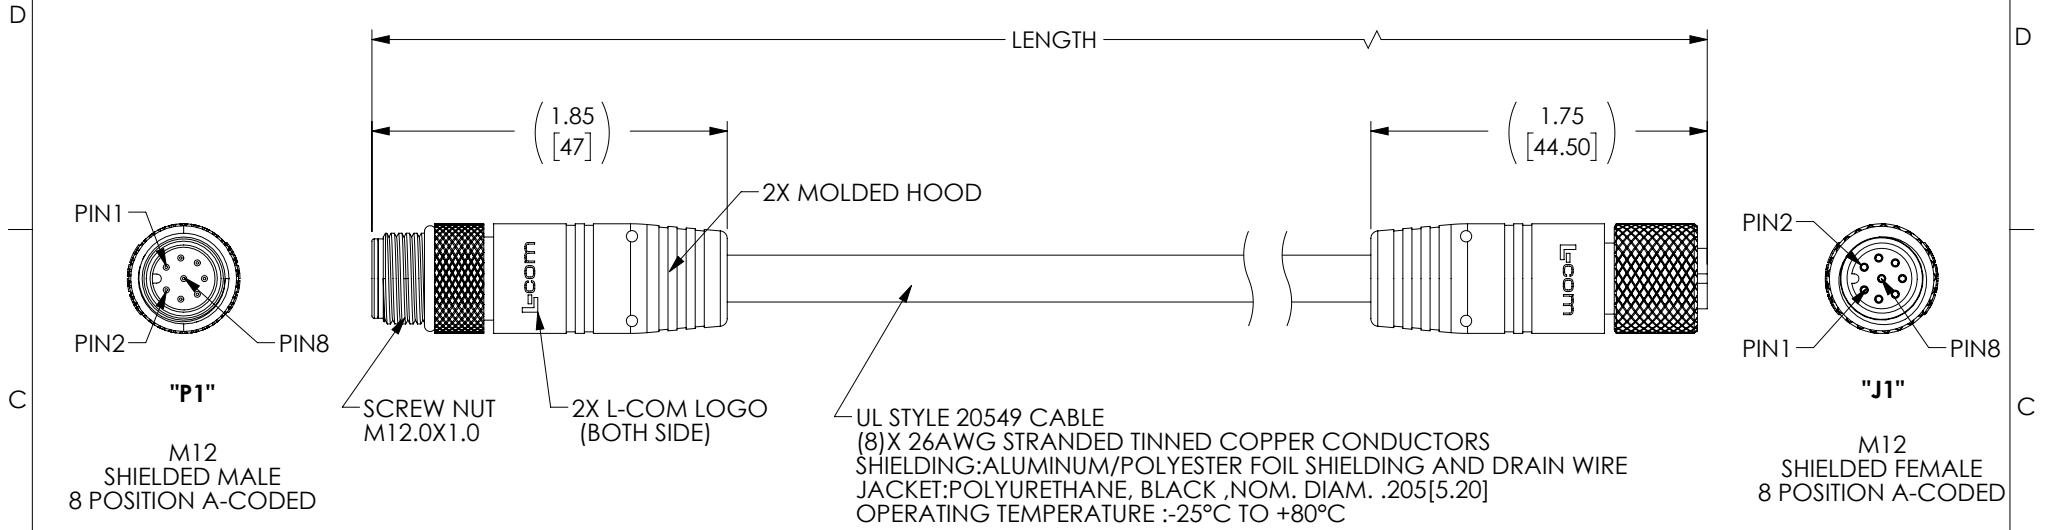

UL STYLE 20549 CABLE
 (8)X 26AWG STRANDED TINNED COPPER CONDUCTORS
 SHIELDING:ALUMINUM/POLYESTER FOIL SHIELDING AND DRAIN WIRE
 JACKET:POLYURETHANE, BLACK ,NOM. DIAM. .205[5.20]
 OPERATING TEMPERATURE :-25°C TO +80°C

NOTES


MATERIAL:
 MOLDED HOOD:THERMOPLASTIC POLYURETHANE, UL94 V-0, BLACK
 INSULATOR:PBT+GF, BLACK
 SHELL/SCREW NUT: BRASS, NICKEL PLATE
 CONTACTS:PHOSPHOR BRONZE, 15µ" MIN. GOLD PLATE

ELECTRICAL:
 NOMINAL VOLTAGE RATING: 30 V AC/DC
 MAX CURRENT: 2A

APPLICATION:
 INGRESS PROTECTION RATING IS IP67 (MATED).

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: -25°C TO +80°C
 CABLE JACKET RESISTANCE: OIL, SUNLIGHT, AND CHEMICAL RESISTANT
 CABLE JACKET FLAME RATING:VW-1

MISCELLANEOUS
 CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

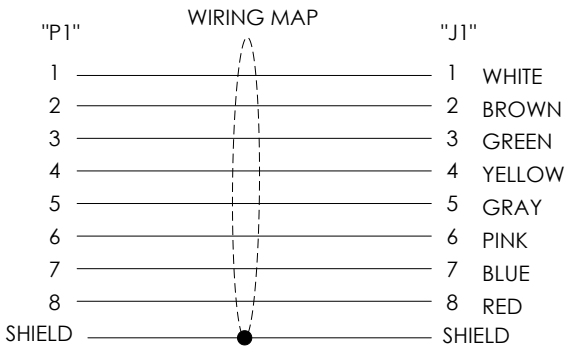

PART NUMBER	LENGTH	
	FEET	METERS
TRG884-P6B-05M	1.64	0.5
TRG884-P6B-1M	3.28	1.0
TRG884-P6B-2M	6.56	2.0
TRG884-P6B-3M	9.84	3.0
TRG884-P6B-5M	16.41	5.0
TRG884-P6B-10M	32.82	10.0

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY DCUI	12/04/2018		CHECKED BY SPAN
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [13]	APPROVED BY DGUTTADAUR	12/04/2018	CATEGORY	TELECOM/MODULAR
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION	M12 8 POSITION A-CODE MALE/FEMALE SHIELDED 26AWG PUR JACKET BLK
PROJECTION	REF	SCALE: NONE	SIZE A	FSCM NO. 43321
			DWG. NO. TRG884-P6B	REV. A
			CAD FILE: TRG884-P6B.SLDDRW	SHEET 1 OF 1