




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	BRASS	GOLD
OUTER CONTACT	BRASS	NICKEL
LOCK RING	BRASS	NICKEL
CRIMP FERRULE	BRASS	NICKEL
SPACER	TEFLON	---
INSULATOR	TEFLON	---
SPACER	BRASS	NICKEL


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/26/10	B.PUCHASKI
B	ECN 5802: CHANGED VALUES TO 0 - 4 GHz	11/2/11	D.FRISIELLO
C	ECN 6355: ADDED .128" CRIMP SIZE FOR SMALLER END OF STEP FERRULE	8/21/12	D. DESJARDIN
D	ECN 6534: CHANGE SMALL CRIMP SIZE .128 TO .151	11/19/12	B.PUCHASKI

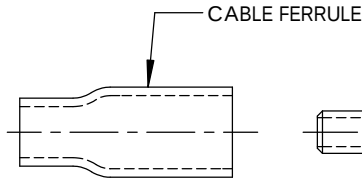


**RECOMMENDED
CABLE FERRULE
CRIMP SIZE
(SMALLER END)**



**RECOMMENDED
CABLE FERRULE
CRIMP SIZE
(LARGER END)**



**RECOMMENDED
CENTER PIN
CRIMP SIZE**

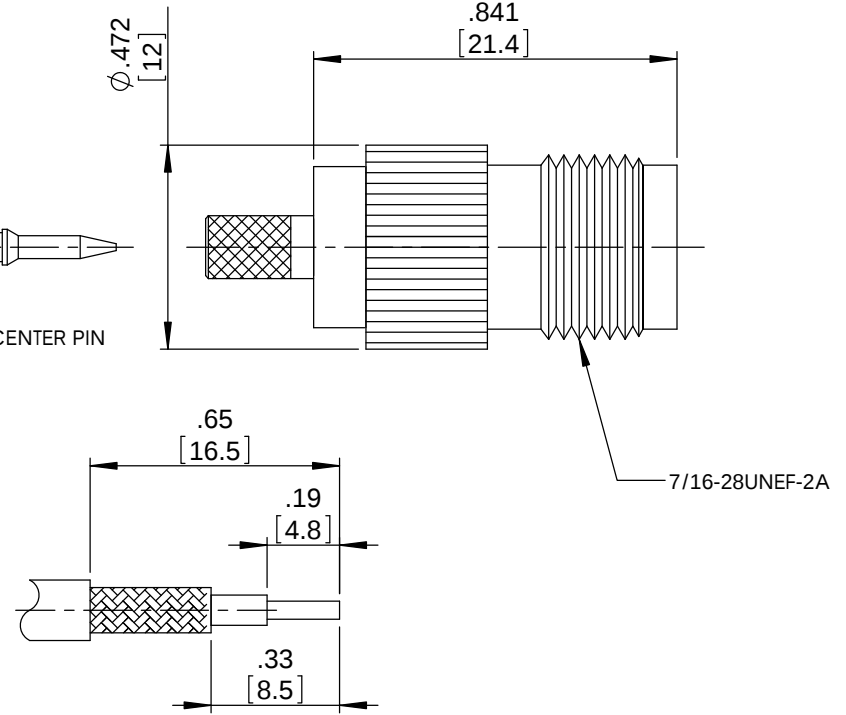

**RECOMMENDED CABLE
STRIPPING**

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHMS
WITHSTAND VOLTAGE: 1500V
FREQUENCY RANGE: 0~4 GHz
VSWR: <1.50 @ 0~4 GHz
DURABILITY: ≥ 500 CYCLE
CABLE RETENTION: > 30 POUNDS

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1° PROJECTION 	APPROVALS DRAWN BY B.Puchaski	DATE 02/26/10	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY M.Audas	02/26/10	
	APPROVED BY M.Audas	02/26/10	CATEGORY COAXIAL
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION RP-TNC Straight Jack Crimp for RG316/U, RG174/U, RG188A/U, 100-Series	SIZE A
COLOR VARIATIONS MAY OCCUR		FSCM NO. 43321	DWG. NO. ARTJ-1100
SCALE: NONE		CAD FILE: ARTJ-1100.SLDDRW	REV. D
		SHEET 1 OF 1	