

## 4-CHANNEL LOW CAPACITANCE ESD PROTECTION DIODES ARRAY

The LRC099-04DT1G is a 4-channel ultra low capacitance rail clam ESD protection diodes array . Each channel consists of a pair of diodes that steer positive or negative ESD current to either the positive or negative rail . A zener diode is integrated in to the array between the positive and negative supply rails. In the typical applications, the negative rail pin (assigned as GND) is connected with system ground . The Positive ESD current is steered to the ground through an ESD diode and Zener diode and the positive ESD voltage is clamped to the zener voltage. The LRC099-04DT1G is idea to protect high speed data lines.

### ●APPLICATIONS

- 1) HDMI / DVI ports
- 2)Display Port interface
- 3)10M / 100M / 1G Ethernet
- 4)USB 2.0 interface
- 4)VGA interface
- 5)Set-top box
- 6)Flat panel Monitors / TVs
- 7)PC / Note book

### ●FEATURES

- 1) 4 channels of ESD protection;
- 2)Provides ESD protection to IEC61000-4-2 level 4
  - $\pm 15\text{kV}$  air discharge
  - $\pm 8\text{kV}$  contact discharge;
- 3) Channel I/O to GND capacitance: 0.9pF(Max)
- 4) Channel I/O to I/O capacitance: 0.45pF(Max)
- 5) Low clamping voltage;
- 6) Low operating voltage;
- 7) Improved zener structure;
- 8) Optimized package for easy high speed data lines PCB layout;
- 9) RoHS compliant.


### ●DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
LRC099-04DT1G	24P	3000Tape&Reel

## LRC099-04DT1G



### PIN CONFIGURATION

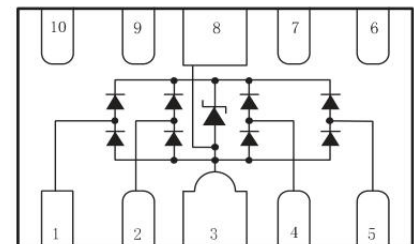

**LRC099-04DT1G****●ABSOLUTE MAXIMUM RATINGS**







Parameter	Symbol	Limits	Unit
Peak Pulse Power(8/20us)	PPP	150	W
Peak Pulse Current(8/20us)	IPP	5	A
ESD per IEC 61000-4-2(Air)	VESD1	±15kV	kV
ESD per IEC 61000-4-2(Contact)	VESD2	±8kV	kV
Operating Temperature Range	Topr	-55 ~ +125	°C
Storage Temperature Range	Tstg	-55 ~ +150	°C


**●ELECTRICAL CHARACTERISTICS (Ta= 25°C)**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse Working Voltage	VRWM	—	—	5	V	Any I/O pin to GND
Reverse Breakdown Voltage	VBR	6	—	—	V	It =1mA; Any I/O pin to GND
Reverse Leakage Current	IR	—	—	1	μA	VRWM =5V, T=25°C; Any I/O pin to GND
Positive Clamping Voltage	VC1	—	8.5	12	V	IPP=1A, tP=8/20μs; Positive pulse; Any I/O pin to GND
Negative Clamping Voltage	VC2	—	1.8	—	V	IPP=1A, tP=8/20μs; Negative pulse; Any I/O pin to GND
Junction Capacitance Between Channel	CJ1	—	0.35	0.45	pF	VR=0V, f=1MHz; Between I/O pins
Junction Capacitance Between I/O And GND	CJ2	—	—	0.9	pF	VR=0V, f=1MHz; Any I/O pin to GND

## LRC099-04DT1G


### TYPICAL ELECTRICAL CHARACTERISTICS CURVE

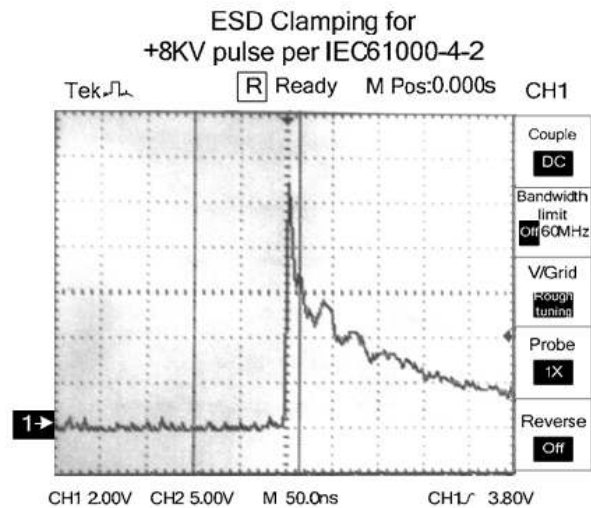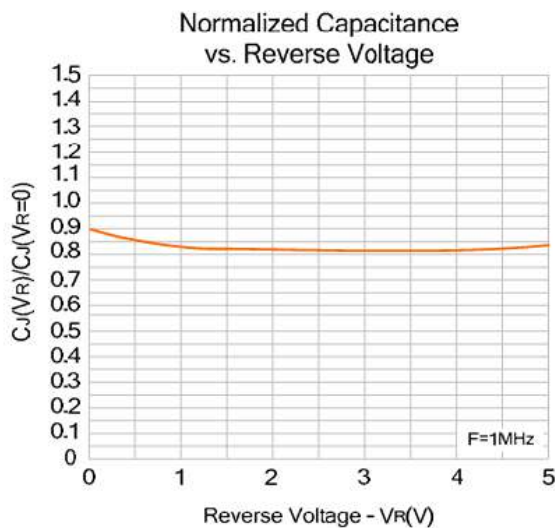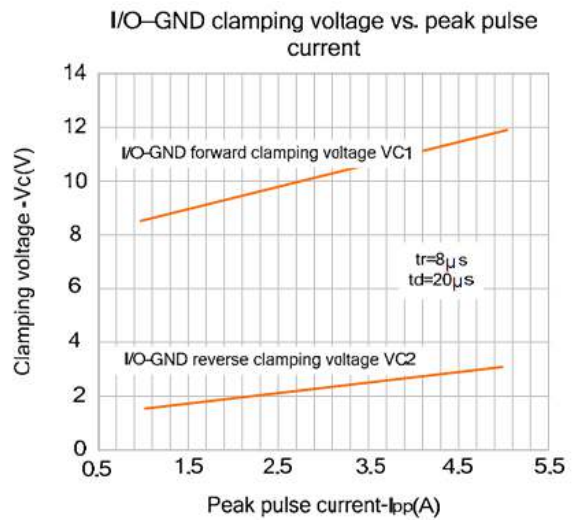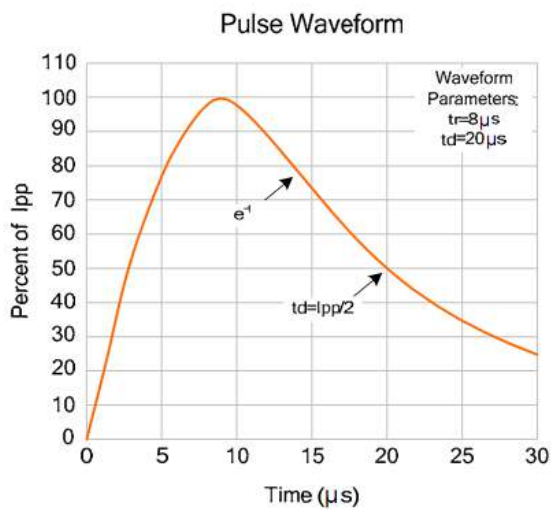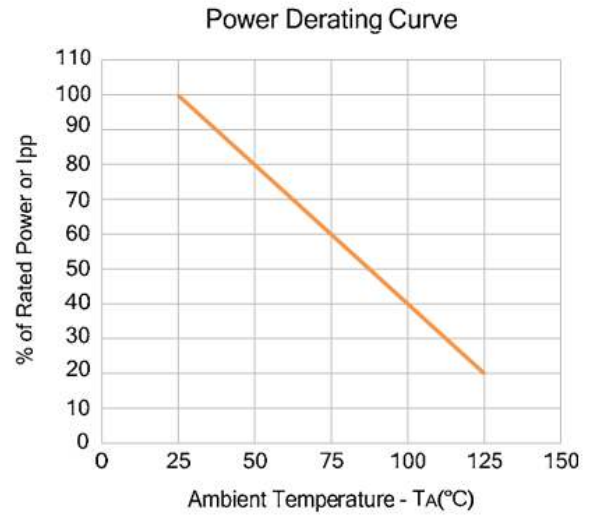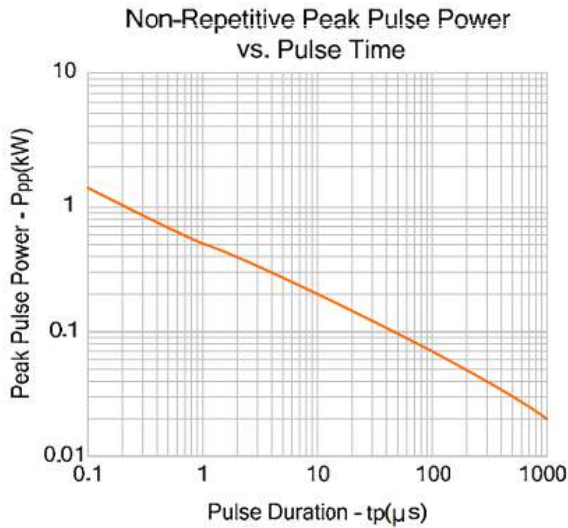

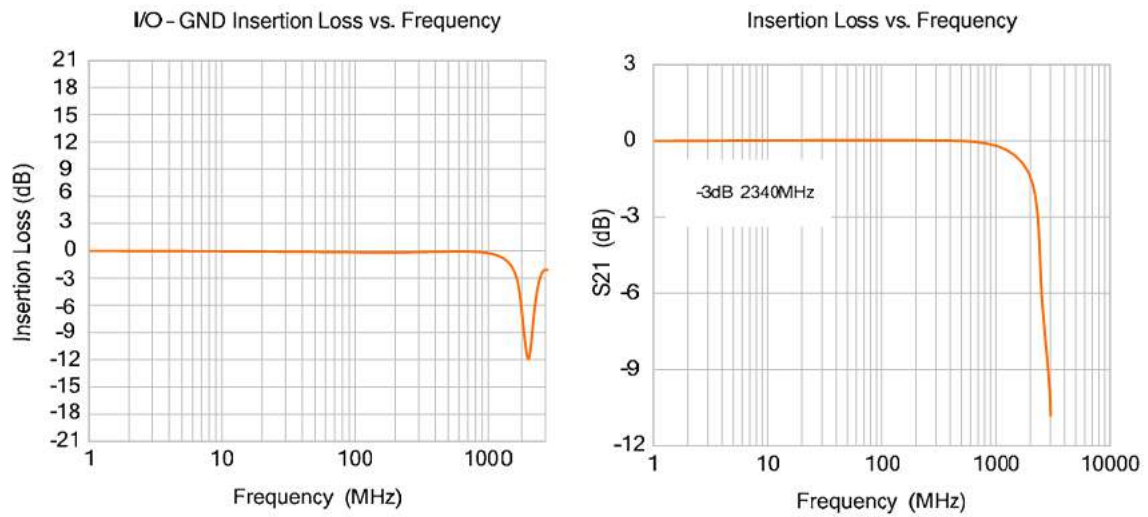**LRC099-04DT1G****TYPICAL ELECTRICAL CHARACTERISTICS CURVE**


## LRC099-04DT1G

### OUTLINE AND DIMENSIONS

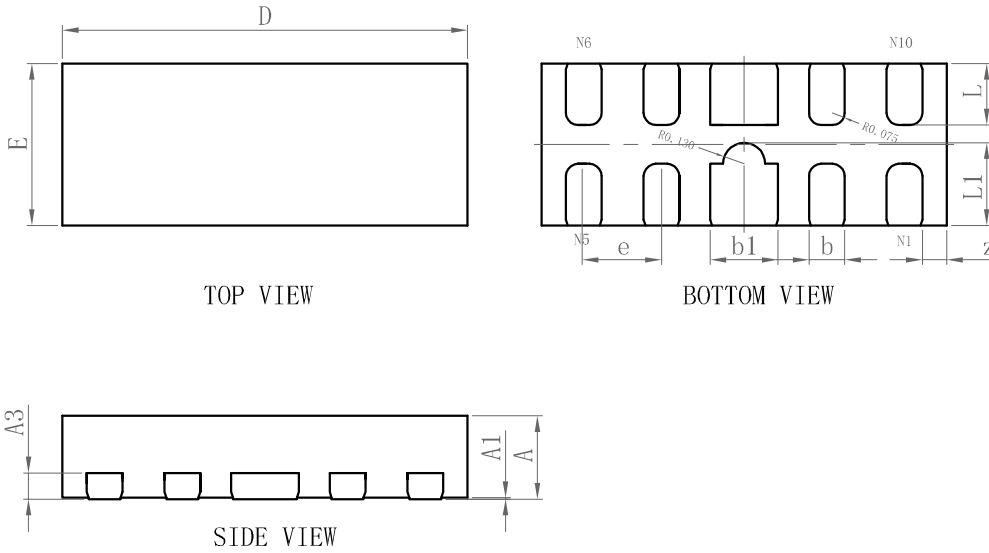

DFN2510			
Dim	Min	Typ	Max
A	0.48	0.53	0.58
A1	0	0.02	0.05
A3	-	0.152	-
b	0.17	0.22	0.27
b1	0.37	0.42	0.47
D	2.45	2.50	2.55
e	0.45	0.50	0.55
E	0.95	1.00	1.05
L	0.33	0.38	0.43
L1	0.46	0.51	0.56
z	0.10	0.15	0.20
All Dimensions in mm			

### SOLDERING FOOTPRINT

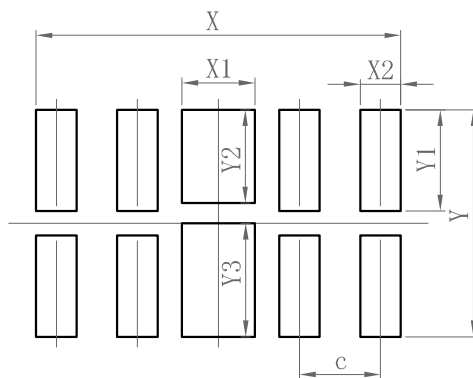

DFN2510	mm
c	0.5
X	2.25
X1	0.45
X2	0.25
Y	1.4
Y1	0.625
Y2	0.575
Y3	0.7

**DISCLAIMER**

- Curve guarantee in the specification. The curve of test items with electric parameter is used as quality guarantee. The curve of test items without electric parameter is used as reference only.
- Before you use our Products for new Project, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.