



S-LN4812LT1G

30V N-Channel Enhancement-Mode MOSFET



1. FEATURES

- VDS= 30V
- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S-prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.

2. APPLICATIONS

- High density cell design for ultra low on-resistance
- Advanced trench process technology
- High power and current handling capability

3. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
S-LN4812LT1G	N48	3000/Tape&Reel
S-LN4812LT3G	N48	10000/Tape&Reel

4. MAXIMUM RATINGS(Ta = 25°C)

Parameter	Symbol	Limits	Unit
Drain-Source Voltage	VDSS	30	V
Gate-to-Source Voltage – Continuous	VGS	±20	V
Drain Current			A
– Continuous TA = 25°C	ID	6	
– Pulsed(Note 1)	IDM	30	

5. THERMAL CHARACTERISTICS

Parameter	Symbol	Limits	Unit
Maximum Power Dissipation	PD	1.4	W
Thermal Resistance, Junction-to-Ambient(Note 2)	RθJA	90	°C/W
Thermal Resistance, Junction-to-Ambient(Note 3)	RθJA	205	°C/W
Junction and Storage temperature	TJ,Tstg	-55~+150	°C





1. Repetitive Rating: Pulse width limited by the Maximum junction temperature.
2. 1-in² 2oz Cu PCB board.
3. Surface-mounted on FR4 board using the minimum recommended pad size.

6. ELECTRICAL CHARACTERISTICS (Ta= 25°C)





Characteristic	Symbol	Min.	Typ.	Max	Unit
Static					
Drain–Source Breakdown Voltage (VGS = 0, ID = 250μA)	V(BR)DSS	30	-	-	V
Zero Gate Voltage Drain Current (VDS=24V, VGS=0V)	IDSS	-	-	1	μA
Gate–Body Leakage Current, Forward (VDS = 0 V, VGS = 20 V)	IGSSF	-	-	100	nA
Gate–Body Leakage Current, Reverse (VDS = 0 V, VGS = -20 V)	IGSSR	-	-	-100	nA
Gate Threshold Voltage (VDS = VGS, ID = 250μA)	VGS(th)	1.0	1.5	2.1	V
Static Drain–Source On–State Resistance(Note 4) (VGS = 10 V, ID = 6 A) (VGS = 4.5 V, ID = 5 A)	RDS(on)	- -	22 35	38 55	mΩ
Dynamic					
Input Capacitance (VGS = 0 V, f = 1.0MHz, VDS= 15 V)	Ciss	-	364	-	pF
Output Capacitance (VGS = 0 V, f = 1.0MHz, VDS= 15 V)	Coss	-	45	-	pF
Reverse Transfer Capacitance (VGS = 0 V, f = 1.0MHz, VDS= 15 V)	Crss	-	35	-	pF
Turn-On Delay Time	(VDD = 15V, RL =15Ω, ID = 1A, VGEN = 10V RG = 6Ω)	td(on)	-	9	ns
Rise Time		tr	-	14	
Turn-Off Delay Time		td(off)	-	30	
Fall Time		tf	-	5	
Total Gate Charge	(VDS = 15 V, VGS = 10 V, ID = 6 A)	Qg	-	5.7	nC
Gate-Source Charge		Qgs	-	1	
Gate-Drain Charge		Qgd	-	1.4	
Forward Voltage (VGS = 0 V, ISD = 1 A)	VSD	-	-	1.3	V
Max.Diode Forward Current	IS	-	-	3	A

4.Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2.0%.


7. ELECTRICAL CHARACTERISTICS CURVES

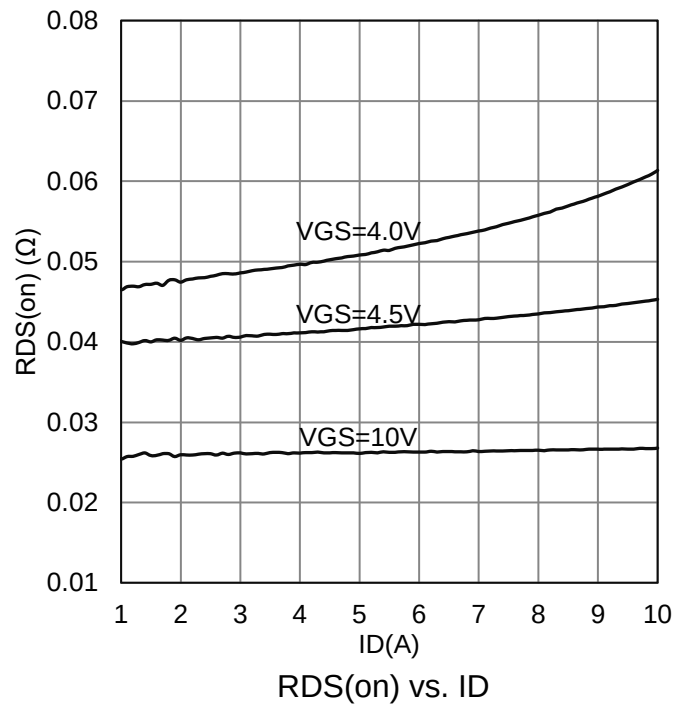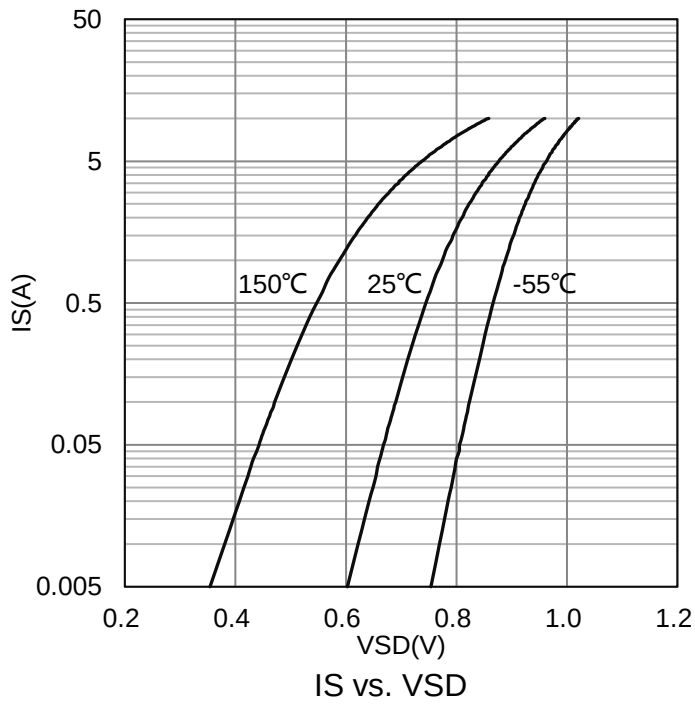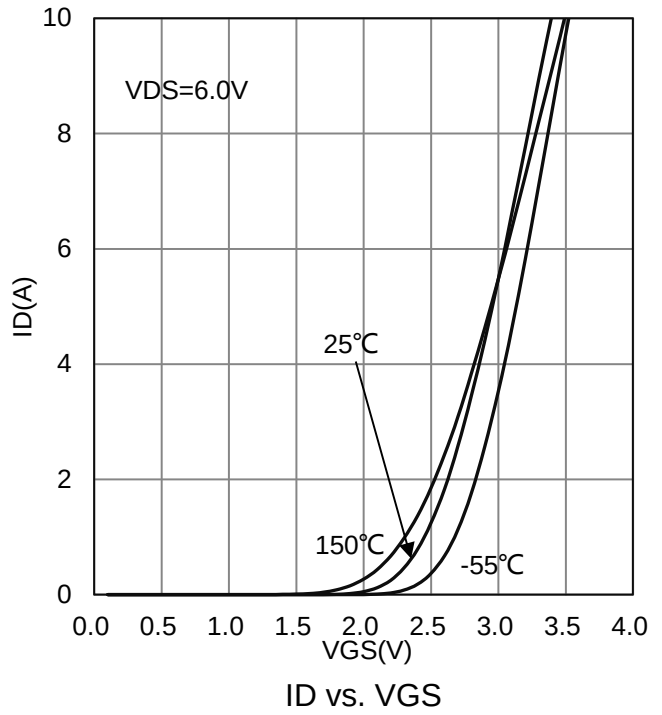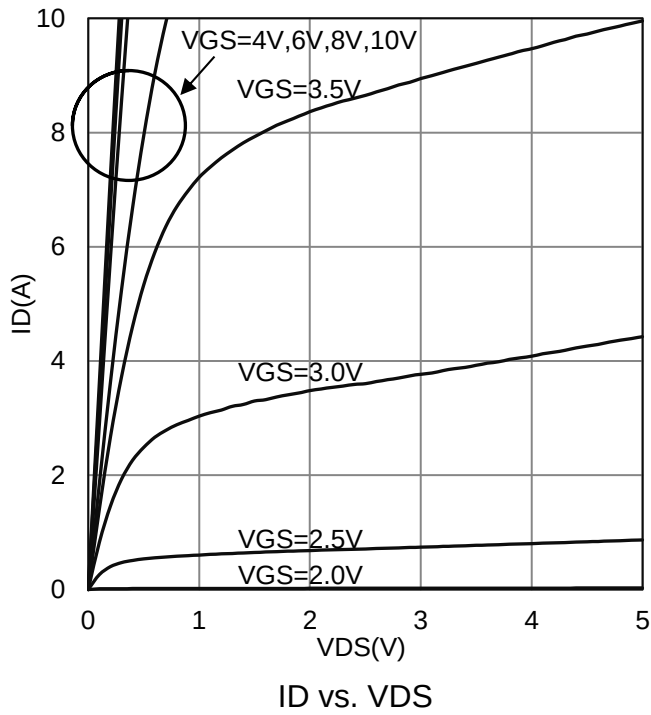

7. ELECTRICAL CHARACTERISTICS CURVES(Con.)

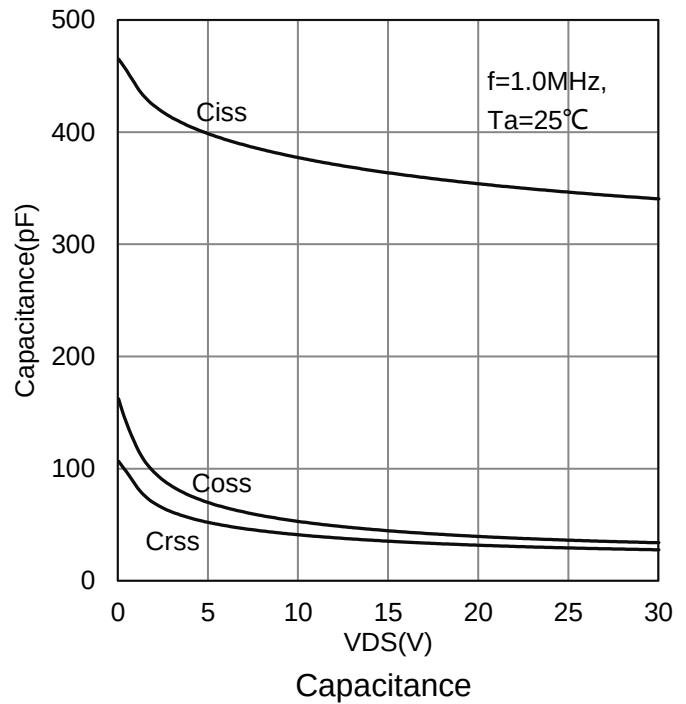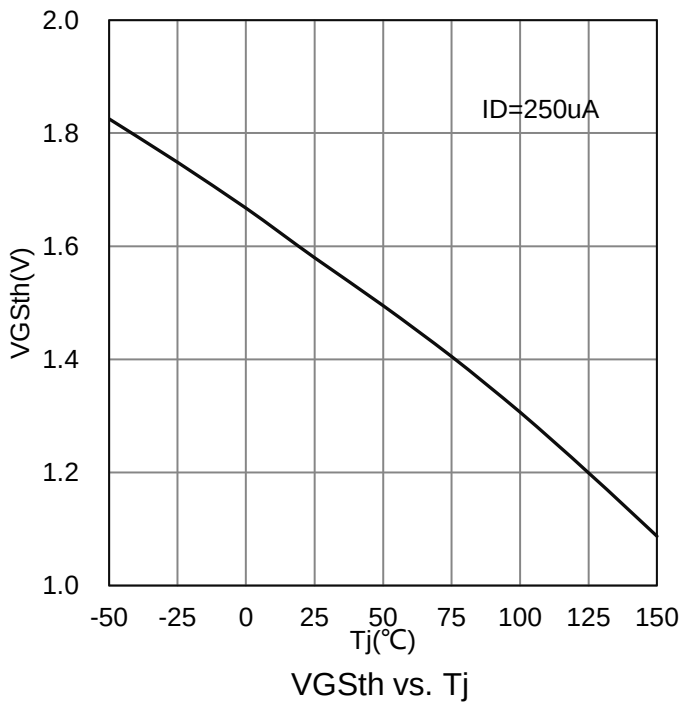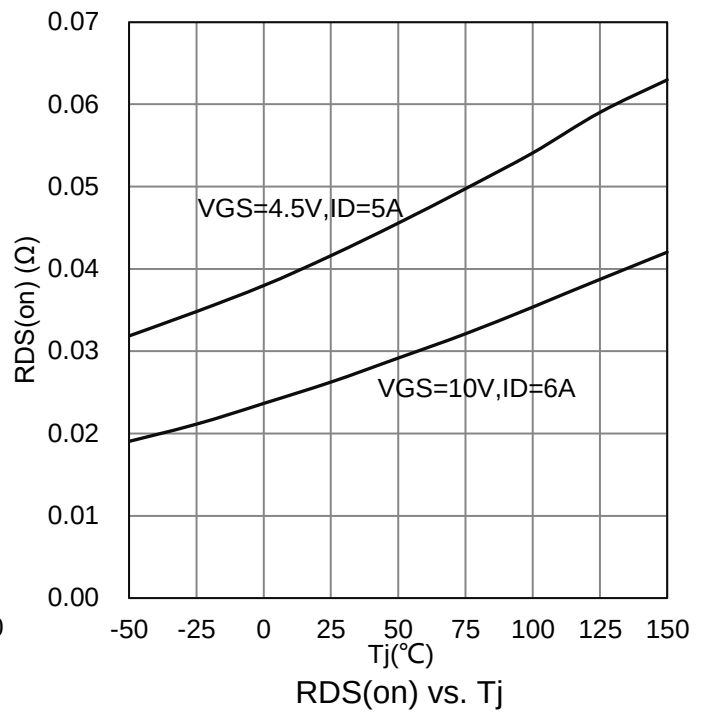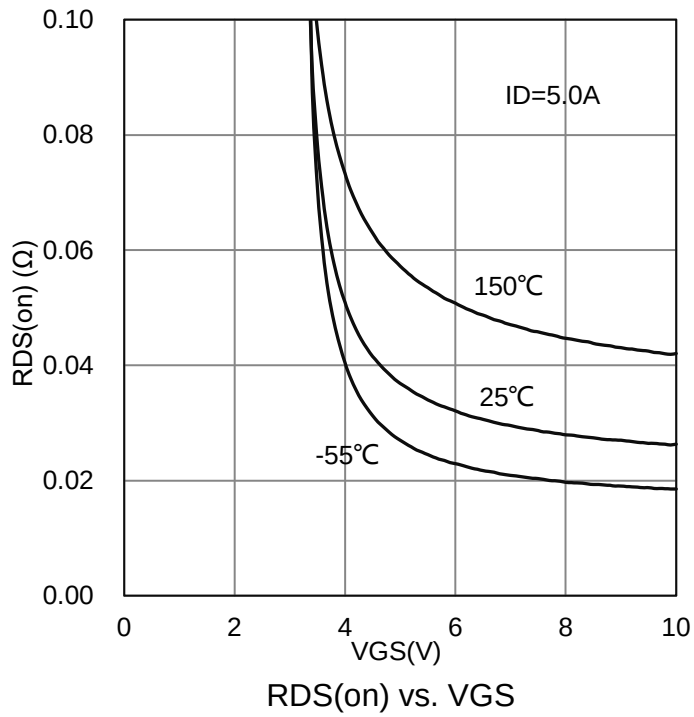


7. ELECTRICAL CHARACTERISTICS CURVES(Con.)

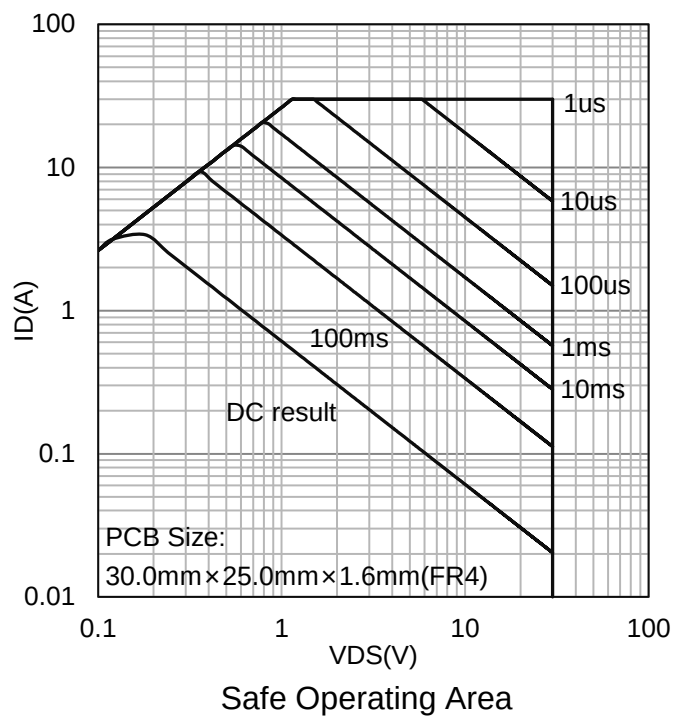

8.OUTLINE AND DIMENSIONS


Notes:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

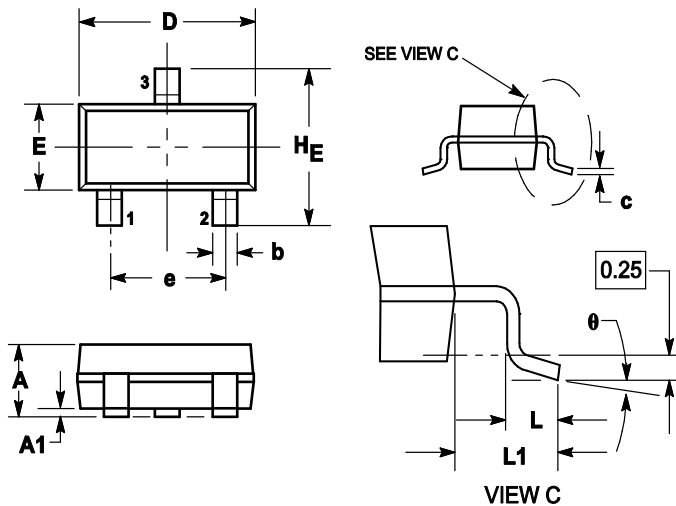

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.89	1	1.11	0.035	0.04	0.044
A1	0.01	0.06	0.1	0.001	0.002	0.004
b	0.37	0.44	0.5	0.015	0.018	0.02
c	0.09	0.13	0.18	0.003	0.005	0.007
D	2.80	2.9	3.04	0.11	0.114	0.12
E	1.20	1.3	1.4	0.047	0.051	0.055
e	1.78	1.9	2.04	0.07	0.075	0.081
L	0.10	0.2	0.3	0.004	0.008	0.012
L1	0.35	0.54	0.69	0.014	0.021	0.029
H _E	2.10	2.4	2.64	0.083	0.094	0.104
θ	0°	---	10°	0°	---	10°

9.SOLDERING FOOTPRINT

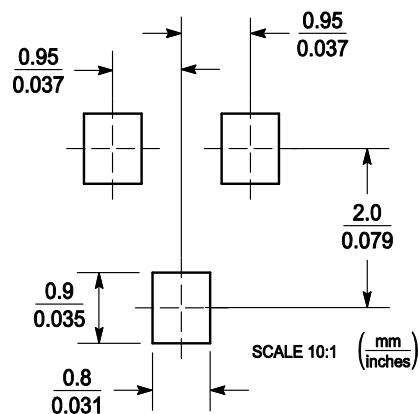

DISCLAIMER

- Before you use our Products, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.