LESD8D3.3CAT5G

ESD PROTECTION DIODE



SOD882



1. FEATURES

- Low Leakage
- Response Time is Typically < 1 ns
- IEC61000−4−2 Level 4 ESD Protection
- Complies with IEC 61000-4-2 standards:Air discharge:± 25kV
  Contact discharge:± 20kV
- We declare that the material of product compliance with RoHS requirements and Halogen Free.

2. APPLICATIONS

- USB3.1 USB3.0 and USB2.0 interfaces
- High speed data signal of HDMI 1.4/2.0
- DisplayPort interface
- Hand held portable applications
- Mobile Phones
- Consumer electronics

3. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
LESD8D3.3CAT5G	BK	10000/Tape&Reel

4. MAXIMUM RATINGS(Ta = 25ºC)

Parameter	Symbol	Limits	Unit
IEC 61000−4−2 (ESD) Contact Air		± 20 ± 25	KV
Peak pulse power@8/20 μs(Note 1)	PPP	60	W
Peak pulse current @8/20 μs(Note 1)	IPP	6	A
Junction Temperature Range	TJ	-55~+150	℃
Storage Temperature Range	Tstg	-55~+150	℃

Note 1.Surge current waveform per Figure 1 according to IEC 61000-4-5.

5. ELECTRICAL CHARACTERISTICS (Ta= 25ºC)

Symbol	Parameter
IPP	Maximum Reverse Peak Pulse Current
VC	Clamping Voltage @ IPP
VRWM	Working Peak Reverse Voltage
IR	Maximum Reverse Leakage Current @ VRWM
VBR	Breakdown Voltage @ IT
IT	Test Current
Ppk	Peak Power Dissipation
C	Capacitance @ VR = 0 and f = 1.0 MHz

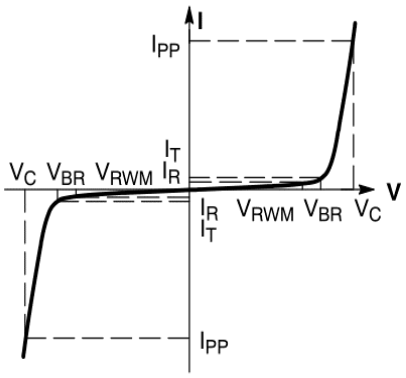

6. ELECTRICAL CHARACTERISTICS (Ta= 25ºC)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	VRWM				3.3	V
Breakdown Voltage	VBR	IT = 1mA	5.0		6.5	V
Reverse leakage current	IR	VR = 3.3V			0.1	µA
Clamping Voltage(Note 1)	VC	IPP = 1A, tp=8/20µs IPP = 6A, tp=8/20µs			7 10	V
Junction Capacitance	Cj	VR = 0V, f = 1MHz	8	12	16	pF

Note 1.Surge current waveform per Figure 1 according to IEC 61000-4-5.

7. ELECTRICAL CHARACTERISTICS CURVES

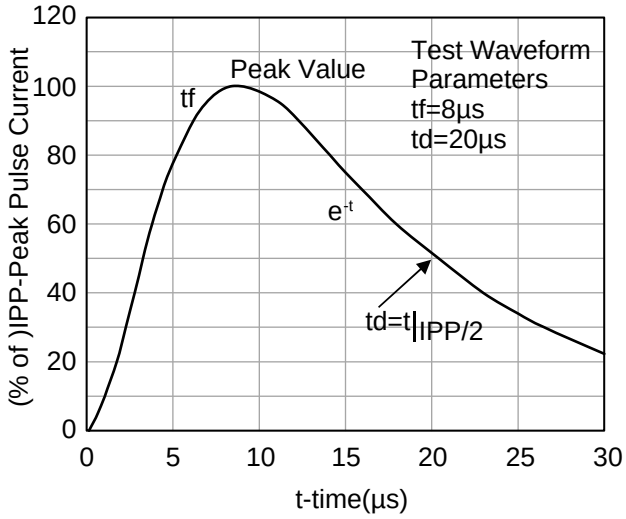

Figure 1. Pulse Waveform
according to IEC 61000-4-5

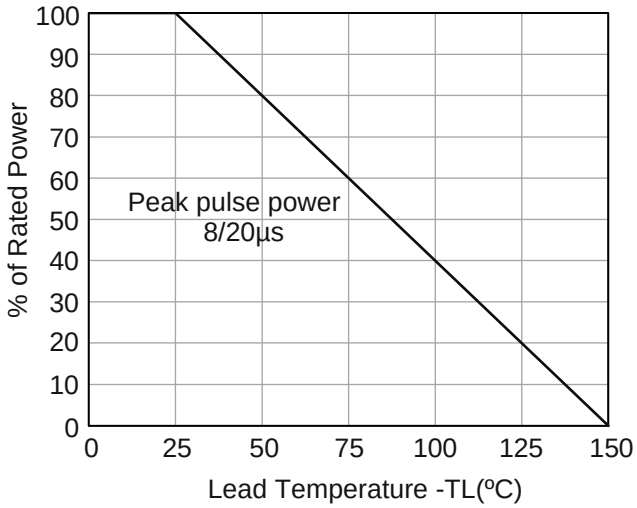

Figure 2. Power Derating Curve

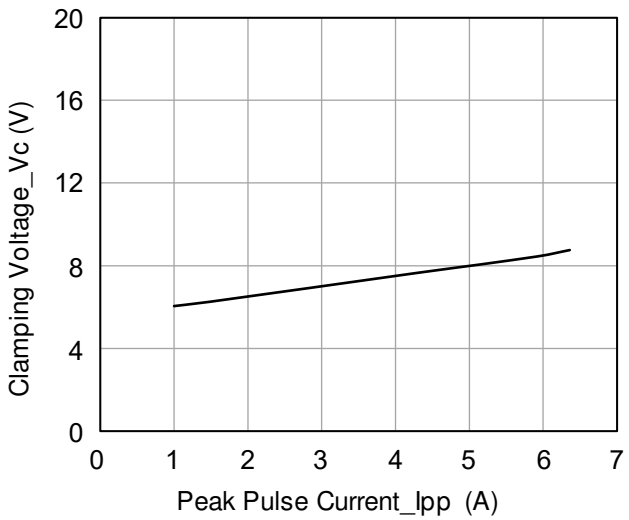

Figure 3.Clamping Voltage vs.Peak Pulse Current
according to IEC 61000-4-5.

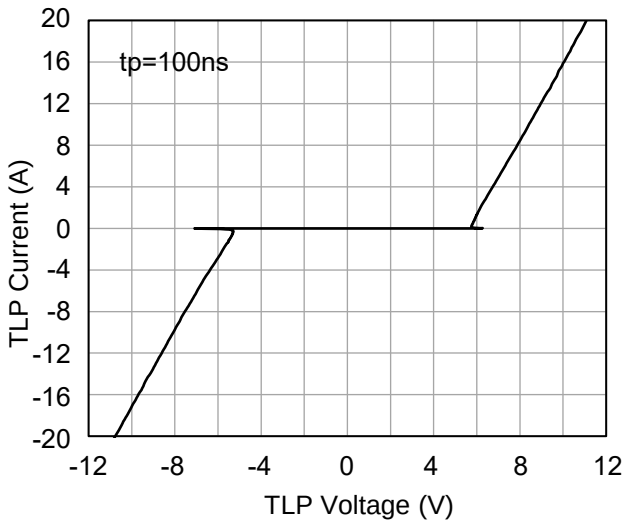

Figure 4. TLP Measurement

8.OUTLINE AND DIMENSIONS

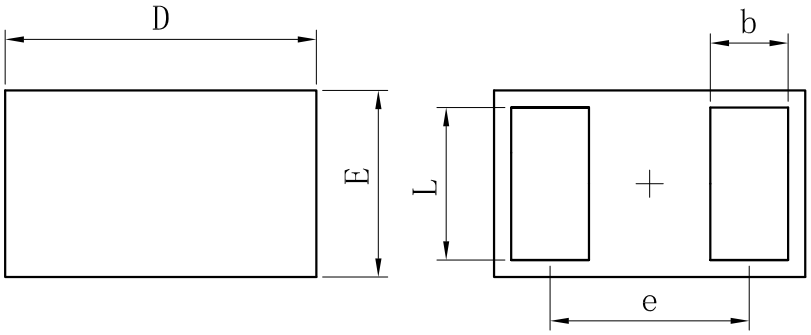

TOP VIEW BOTTOM VIEW

SOD882			
Dim	Min	Typ	Max
D	0.95	1.00	1.05
E	0.55	0.60	0.65
e	–	0.64	–
L	0.44	0.49	0.54
b	0.20	0.25	0.30
A	0.43	0.48	0.53
A1	0	–	0.05
A3	0.127REF.		
All Dimensions in mm			

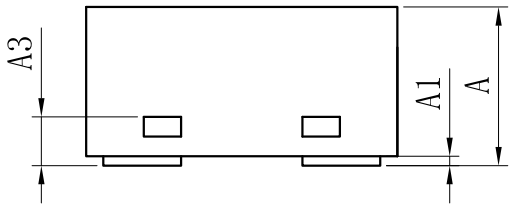

SIDE VIEW

9.SOLDERING FOOTPRINT

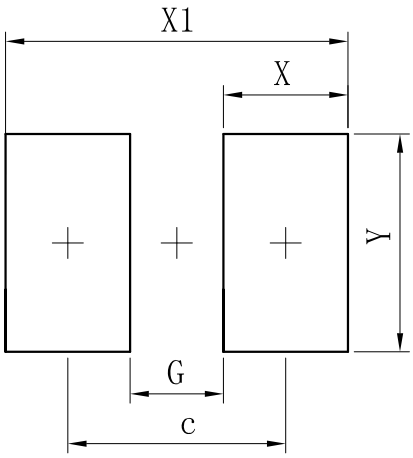

Dimensions	(mm)
c	0.70
G	0.30
X	0.40
X1	1.10
Y	0.70

DISCLAIMER

- Curve guarantee in the specification. The curve of test items with electric parameter is used as quality guarantee. The curve of test items without electric parameter is used as reference only.

- Before you use our Products for new Project, you are requested to carefully read this document and fully under--stand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC’s Products against warning, caution or note contained in this document.

- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products,please confirm the latest information with a LRC sales represe--ntative.