



General Purpose Transistors




MARKING DIAGRAM



xx = Device Code
(See Table)
M = Date Code

- Moisture Sensitivity Level: 1
- ESD Rating – Human Body Model: >4000 V
– Machine Model: >400 V

LBC846ALT1 Series



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage LBC846 LBC847, LBC850 LBC848, LBC849	V_{CEO}	65 45 30	Vdc
Collector–Base Voltage LBC846 LBC847, LBC850 LBC848, LBC849	V_{CBO}	80 50 30	Vdc
Emitter–Base Voltage LBC846 LBC847, LBC850 LBC848, LBC849	V_{EBO}	6.0 6.0 5.0	Vdc
Collector Current – Continuous	I_C	100	mAdc

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR–5 Board (Note 1.) $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	225 1.8	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient (Note 1.)	$R_{\theta JA}$	556	$^\circ\text{C/W}$
Total Device Dissipation Alumina Substrate (Note 2.) $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	300 2.4	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient (Note 2.)	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Junction and Storage Temperature Range	T_J, T_{stg}	–55 to +150	$^\circ\text{C}$

DEVICE MARKING

LBC846ALT1= 1A; LBC846BLT1= 1B; LBC847ALT1= 1E; LBC847BLT1= 1F;
LBC847CLT1= 1G; LBC848ALT1= 1J; LBC848BLT1= 1K; LBC848CLT1= 1L;
LBC849BLT1= 2B; LBC849CLT1= 2C; LBC850BLT1= 2F; LBC850CLT1= 2G

- FR–5 = $1.0 \times 0.75 \times 0.062$ in.
- Alumina = $0.4 \times 0.3 \times 0.024$ in. 99.5% alumina.

ORDERING INFORMATION

Device	Package	Shipping
LBC846ALT1	SOT–23	3000/Tape & Reel
LBC846ALT3	SOT–23	10,000/Tape & Reel
LBC846BLT1	SOT–23	3000/Tape & Reel
LBC846BLT3	SOT–23	10,000/Tape & Reel
LBC847ALT1	SOT–23	3000/Tape & Reel
LBC847BLT1	SOT–23	3000/Tape & Reel
LBC847CLT1	SOT–23	3000/Tape & Reel
LBC847CLT3	SOT–23	10,000/Tape & Reel
LBC848ALT1	SOT–23	3000/Tape & Reel
LBC848BLT1	SOT–23	3000/Tape & Reel
LBC848BLT3	SOT–23	10,000/Tape & Reel
LBC848CLT1	SOT–23	3000/Tape & Reel
LBC849BLT1	SOT–23	3000/Tape & Reel
LBC849CLT1	SOT–23	3000/Tape & Reel
LBC850BLT1	SOT–23	3000/Tape & Reel
LBC850CLT1	SOT–23	3000/Tape & Reel

Preferred devices are recommended choices for future use and best overall value.

LBC846ALT1 Series
ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage ($I_C = 10\text{ mA}$)	$V_{(BR)CEO}$	65 45 30	– – –	– – –	V
Collector–Emitter Breakdown Voltage ($I_C = 10\text{ }\mu\text{A}$, $V_{EB} = 0$)	$V_{(BR)CES}$	80 50 30	– – –	– – –	V
Collector–Base Breakdown Voltage ($I_C = 10\text{ }\mu\text{A}$)	$V_{(BR)CBO}$	80 50 30	– – –	– – –	V
Emitter–Base Breakdown Voltage ($I_E = 1.0\text{ }\mu\text{A}$)	$V_{(BR)EBO}$	6.0 6.0 5.0	– – –	– – –	V
Collector Cutoff Current ($V_{CB} = 30\text{ V}$) ($V_{CB} = 30\text{ V}$, $T_A = 150^\circ\text{C}$)	I_{CBO}	– –	– –	15 5.0	nA μA

ON CHARACTERISTICS

DC Current Gain ($I_C = 10\text{ }\mu\text{A}$, $V_{CE} = 5.0\text{ V}$)	LBC846A, LBC847A, LBC848A LBC846B, LBC847B, LBC848B LBC847C, LBC848C	h_{FE}	– – –	90 150 270	– – –	–
($I_C = 2.0\text{ mA}$, $V_{CE} = 5.0\text{ V}$)	LBC846A, LBC847A, LBC848A LBC846B, LBC847B, LBC848B, LBC849B, LBC850B LBC847C, LBC848C, LBC849C, LBC850C		110 200 420	180 290 520	220 450 800	
Collector–Emitter Saturation Voltage ($I_C = 10\text{ mA}$, $I_B = 0.5\text{ mA}$) ($I_C = 100\text{ mA}$, $I_B = 5.0\text{ mA}$)		$V_{CE(sat)}$	– –	– –	0.25 0.6	V
Base–Emitter Saturation Voltage ($I_C = 10\text{ mA}$, $I_B = 0.5\text{ mA}$) ($I_C = 100\text{ mA}$, $I_B = 5.0\text{ mA}$)		$V_{BE(sat)}$	– –	0.7 0.9	– –	V
Base–Emitter Voltage ($I_C = 2.0\text{ mA}$, $V_{CE} = 5.0\text{ V}$) ($I_C = 10\text{ mA}$, $V_{CE} = 5.0\text{ V}$)		$V_{BE(on)}$	580 –	660 –	700 770	mV

SMALL–SIGNAL CHARACTERISTICS

Current–Gain – Bandwidth Product ($I_C = 10\text{ mA}$, $V_{CE} = 5.0\text{ Vdc}$, $f = 100\text{ MHz}$)		f_T	100	–	–	MHz
Output Capacitance ($V_{CB} = 10\text{ V}$, $f = 1.0\text{ MHz}$)		C_{obo}	–	–	4.5	pF
Noise Figure ($I_C = 0.2\text{ mA}$, $V_{CE} = 5.0\text{ Vdc}$, $R_S = 2.0\text{ k}\Omega$, $f = 1.0\text{ kHz}$, $BW = 200\text{ Hz}$)	LBC846A,B, LBC847A,B,C, LBC848A,B,C LBC849B,C, LBC850B,C	NF	– –	– –	10 4.0	dB

LBC846ALT1 Series

LBC847, LBC848, LBC849, LBC850

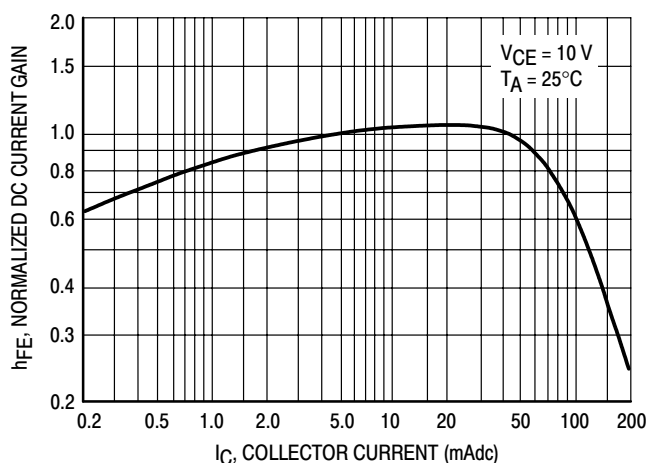


Figure 1. Normalized DC Current Gain

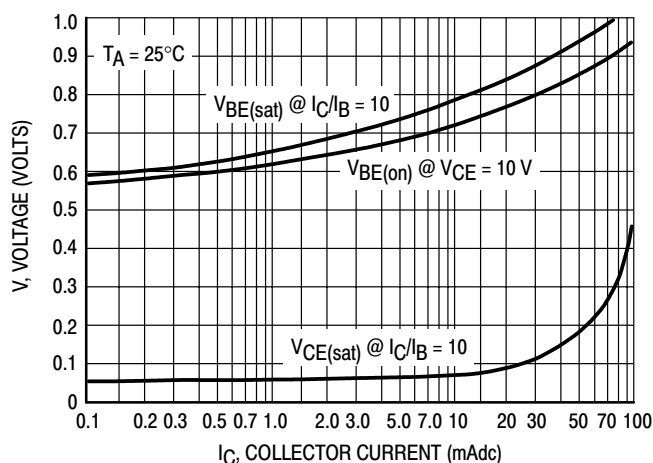


Figure 2. "Saturation" and "On" Voltages

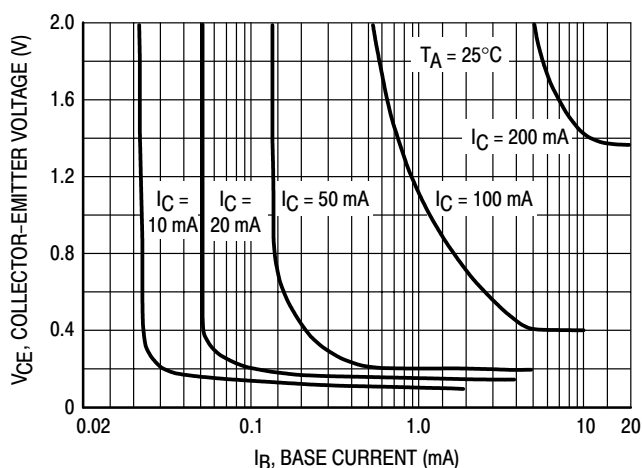


Figure 3. Collector Saturation Region

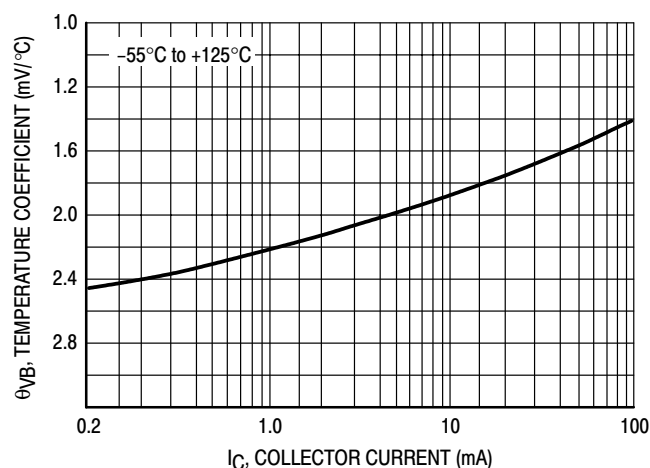


Figure 4. Base-Emitter Temperature Coefficient

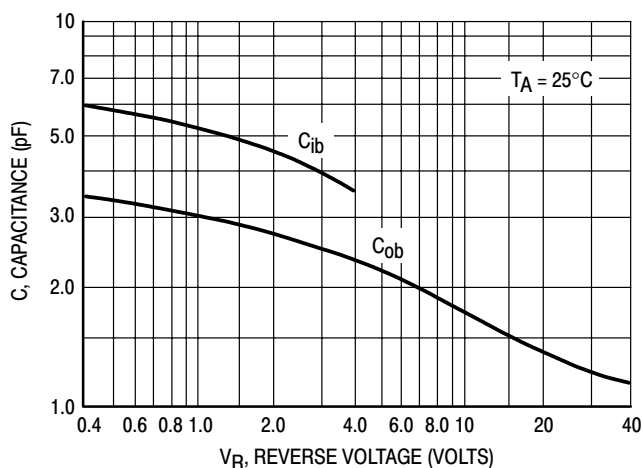


Figure 5. Capacitances

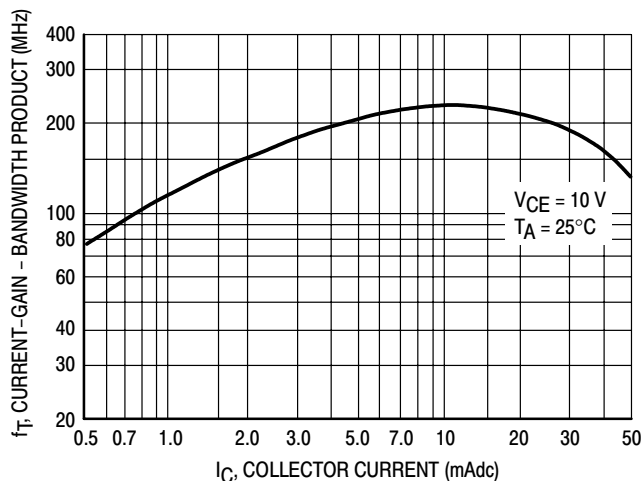


Figure 6. Current-Gain - Bandwidth Product

LBC846ALT1 Series

LBC846

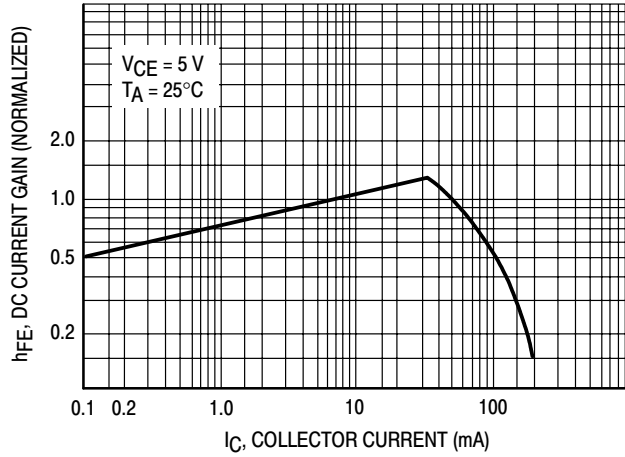


Figure 7. DC Current Gain

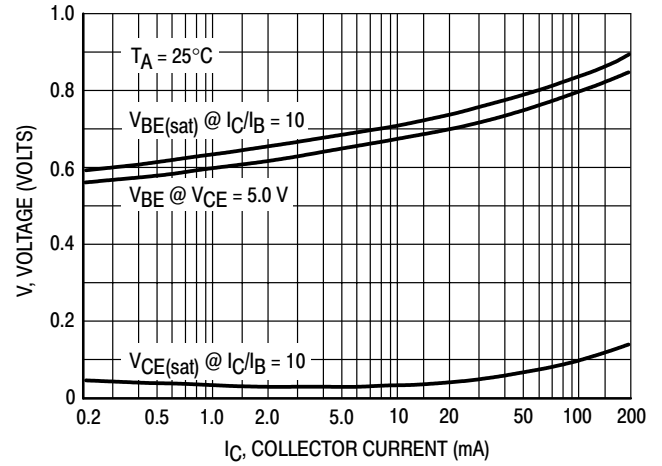


Figure 8. "On" Voltage

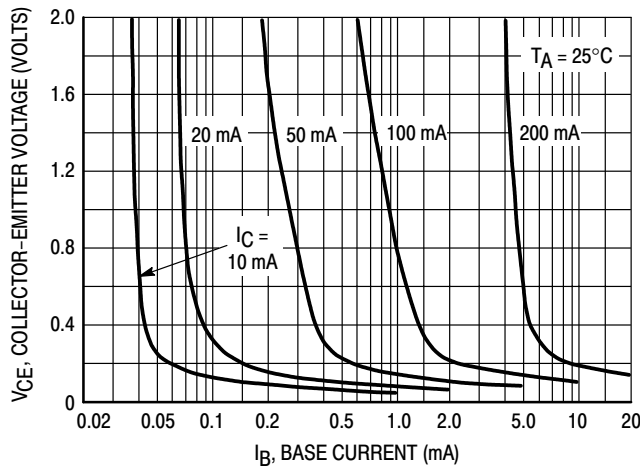


Figure 9. Collector Saturation Region

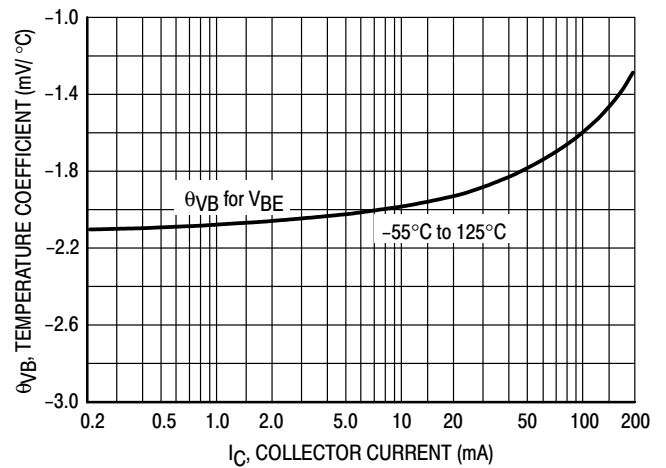


Figure 10. Base-Emitter Temperature Coefficient

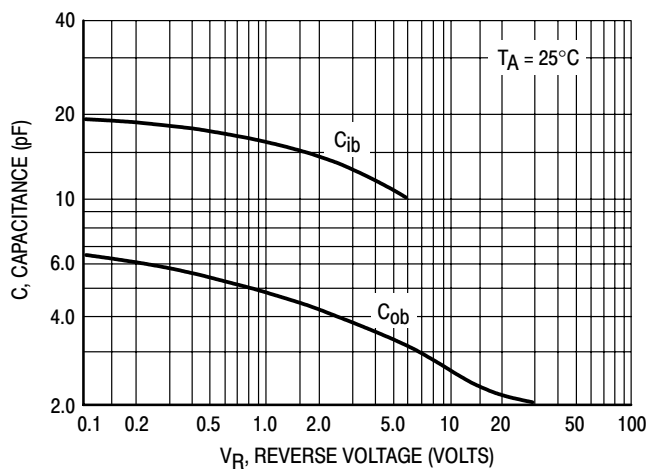


Figure 11. Capacitance

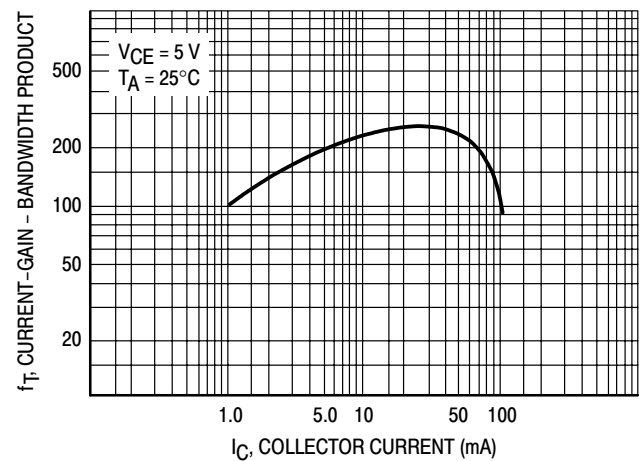
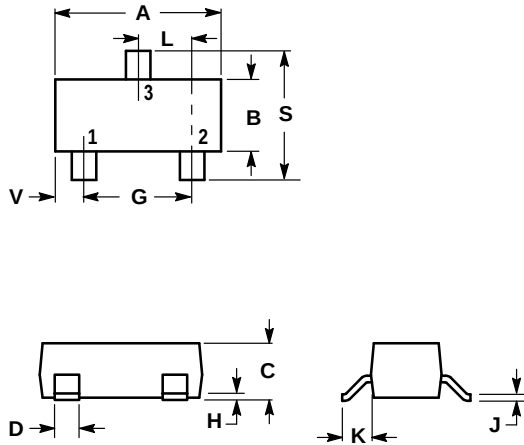


Figure 12. Current-Gain - Bandwidth Product

LBC846ALT1 Series
SOT-23

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0040	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0140	0.0285	0.35	0.69
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.1039	2.10	2.64
V	0.0177	0.0236	0.45	0.60

- PIN 1. BASE
2. EMITTER
3. COLLECTOR

