

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	00
Termination type	No contacts / Accessory
IP rating	0
Cable Ø	2.80 - 3.10 mm
Status	active
Alternative part	



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	GMD*: Bend relief Black
Keying	No keying
Housing Material	Thermoplastic polyurethane elastomer(Desmopan 786)
Variant	N : Black
Weight	.30 g

### Performance

Configuration
Insulator
Rated Current

### Others


IP Rating: 0

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

---

## DRAWINGS

### Draws

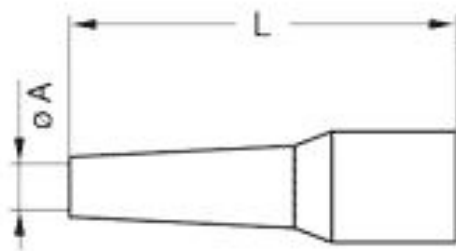

No keying

### Dimensions

	A	L
mm.	2.8	22
in.	0.11	0.87

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*