

SUMMARY

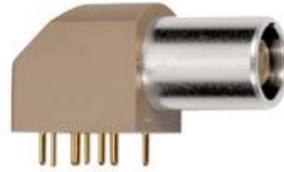


Image is for illustrative purpose only

Wires

| | |
|---------|---|
| Low | 4 |
| High | 0 |
| Coax | 0 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |

Download

- [Request a quote](#)
- [PCB KiCad Pattern](#)
- [Catalog](#)

| | |
|------------------|-----------------------------------|
| Series | 1B |
| Termination type | Female print PCB |
| IP rating | 50 |
| Cable Ø | 0.00 - 0.00 mm |
| Status | active |
| Alternative part | |
| Matching parts | FGG.1B.304.CYCD52 |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|--|
| Shell Style/Model | EP*: Elbow receptacle for printed circuit (solder or screw fixing) |
| Keying | 1 key (alpha=0, plug: male contacts, receptacle: female contacts) |
| Housing Material | PPS (Polyphenylene) shell, other pieces nickel plated brass |
| Variant | |
| Weight | 12.08 g |

Performance

| | |
|---------------|----------------------------|
| Configuration | 1B.304/EPG : 4 Low Voltage |
| Insulator | L: PEEK (UL 94 / V-0/1.5) |
| Rated Current | 4.5 Amps |

Specifications

| |
|---|
| Contact Type: Print (straight) |
| Contact Dia.: 0.9 mm (0.035in) |
| R (max): 4.8 mOhm |
| Test voltage contact-contact : 1.7 kV rms |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


Test voltage contact-body shell : 1.8 kV rms

Others

Endurance (Shell): 5000
Temp (min / max): -55°C / +250°C
Humidity (max): <=95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
Salt Spray Corrosion: >144 hr
IP Rating: 50

DRAWINGS

Draws

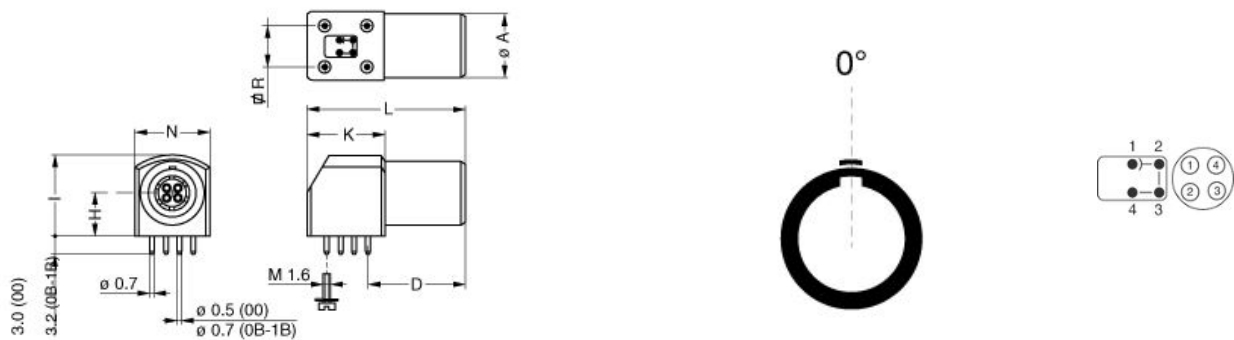

Dimensions

| | A | D | H | I | K | L | N | R |
|-----|------|------|------|------|------|------|------|------|
| mm. | 11 | 16.6 | 7.5 | 14 | 13.3 | 27 | 12.6 | 7.62 |
| in. | 0.43 | 0.65 | 0.30 | 0.55 | 0.52 | 1.06 | 0.50 | 0.30 |

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

None

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.