

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	1B
Termination type	No contacts / Accessory
IP rating	0
Cable Ø	4.50 - 4.90 mm
Status	active
Alternative part	



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	GMA*: Bend relief Black
Keying	No keying
Housing Material	Thermoplastic polyurethane elastomer(Desmopan 786)
Variant	N : Black
Weight	.81 g

### Performance

Configuration
Insulator
Rated Current

### Others


Temp (min / max): -40° C / +80° C
IP Rating: 0

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

---

## DRAWINGS

### Draws

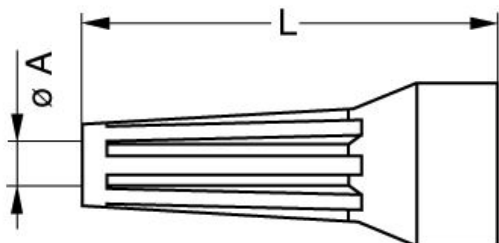

No keying

### Dimensions

	A	L
mm.	4.5	30
in.	0.18	1.18

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

120 222			
---------	--	--	--

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.