

**LOW VF SURFACE MOUNT  
SCHOTTKY BARRIER RECTIFIERS**


REVERSE VOLTAGE - **40** Volts  
FORWARD CURRENT - **3.0** Ampere

**FEATURES**

- For surface mounted applications
- Metal-Semiconductor junction with guardring
- Epitaxial construction
- Very Low forward voltage drop
- High current capability
- Plastic material has UL flammability classification 94V-0
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

- Case : Molded plastic
- Polarity : Indicated by cathode band
- Weight : 0.002 ounces, 0.064 grams

**SMA**


SMA		
DIM.	MIN.	MAX.
A	4.06	4.57
B	2.29	2.92
C	1.27	1.63
D	0.15	0.31
E	4.83	5.59
F	0.05	0.20
G	2.01	2.62
H	0.76	1.52
All Dimensions in millimeter		

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	B340LA	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	40	V
Maximum RMS Voltage	V <sub>RMS</sub>	28	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	40	V
Maximum Average Forward Rectified Current @T <sub>L</sub> =90°C	I <sub>(AV)</sub>	3.0	A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load	I <sub>FSM</sub>	70	A
Maximum Instantaneous Forward Voltage @ IF= 1A; T <sub>J</sub> =25°C @ IF= 3A; T <sub>J</sub> =25°C	V <sub>F</sub>	0.35 0.45	V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ VR= 15V; T <sub>J</sub> =25°C @ VR= 40V; T <sub>J</sub> =25°C	I <sub>R</sub>	0.15 1	mA
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	300	pF
Typical Thermal Resistance (Note 2)	R <sub>θJL</sub>	20	°C/W
Operating Temperature Range	T <sub>J</sub>	-55 to +125	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C

NOTES : 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.  
2.Thermal Resistance Junction to Lead.

REV. 2, May-2007, KSHA13

FIG.1 - FORWARD CURRENT DERATING CURVE

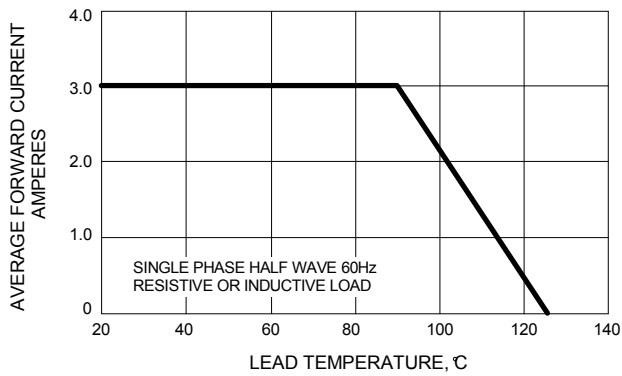


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

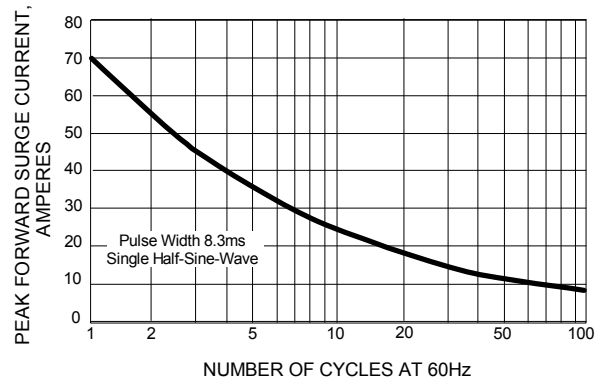


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

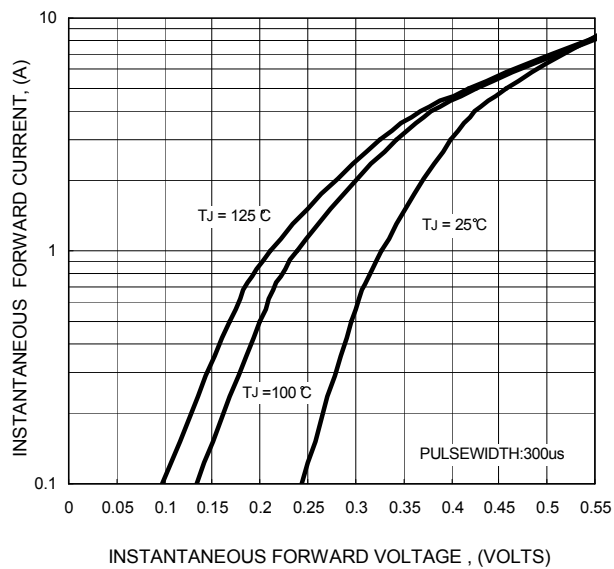


FIG.4 - TYPICAL JUNCTION CAPACITANCE

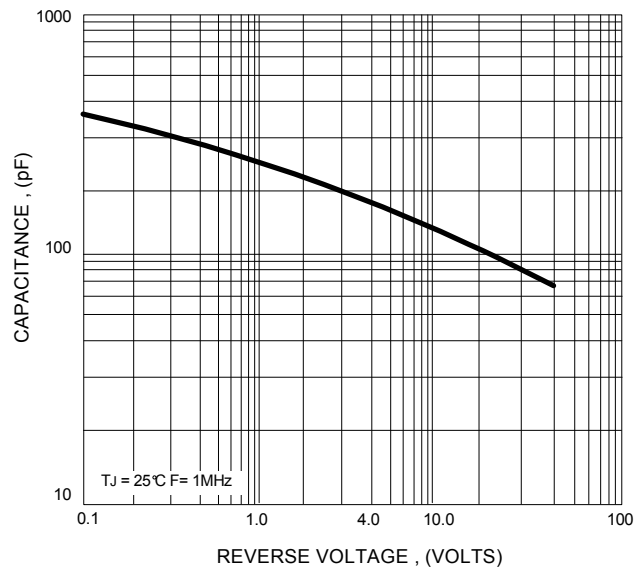


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

