FEATURES

＊1.2 inch (30.42 mm) MATRIX HEIGHT.
＊LOW POWER REQUIREMENT.
＊SINGLE PLANE, WIDE VIEWING ANGLE.
＊SOLID STATE RELIABILITY.
＊5×7 ARRAY WITH X-Y SELECT.
＊COMPATIBLE WITH USASCII AND EBCDIC CODES.
＊STACKABLE HORIZONTALLY.
＊CATEGORIZED FOR LUMINOUS INTENSITY.

DESCRIPTION

The LTP-1457AHR is a 1.2 inch (30.42 mm) matrix height 5×7 dot matrix displays. This device utilizes high efficiency red LED chips, which are made from GaAsP on a transparent GaP substrate, and has a red face and red dot color.

DEVICE

PART NO.	DESCRIPTION
HIGH EFFICIENCY RED	ANODE COLUMN
LTP-1457AHR	CATHODE ROW

PACKAGE DIMENSIONS

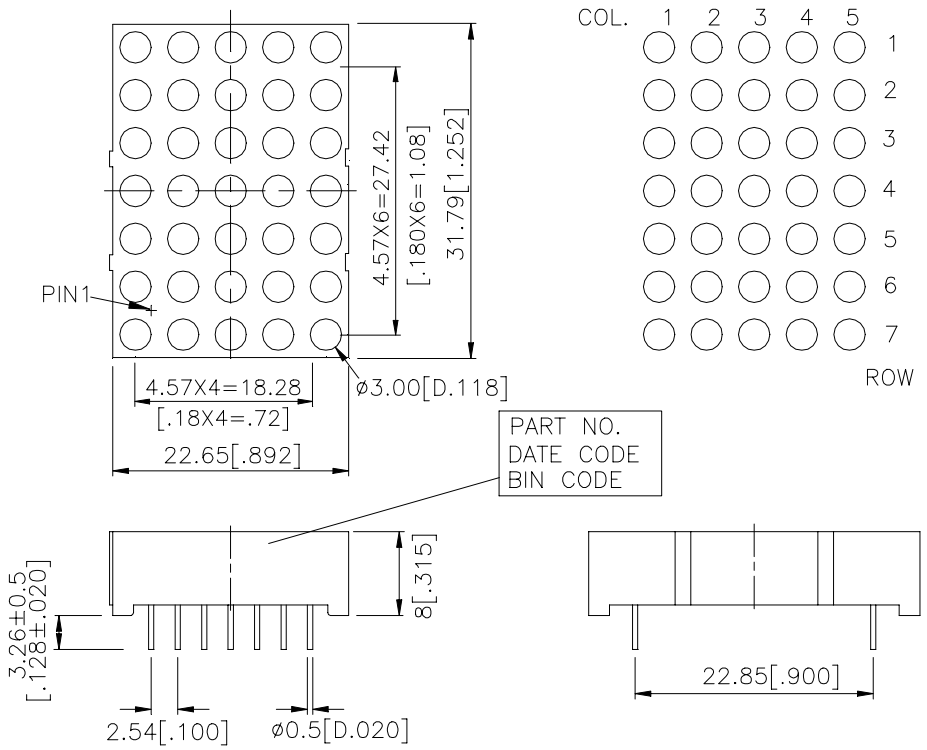

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01“) unless otherwise noted.

INTERNAL CIRCUIT DIAGRAM

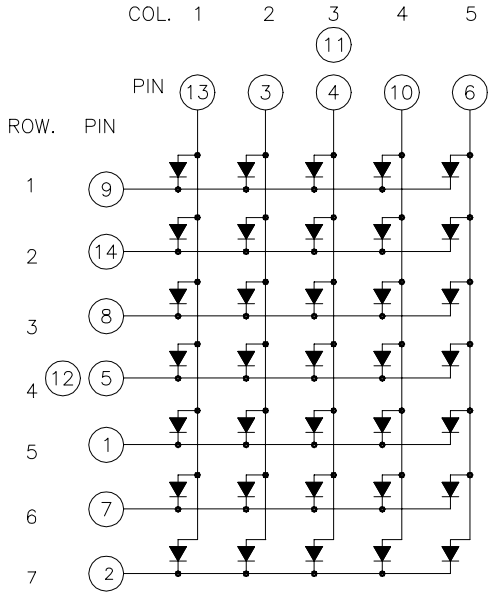

PIN CONNECTION

No.	CONNECTION
1	CATHODE ROW 5
2	CATHODE ROW 7
3	ANODE COLUMN 2
4	ANODE COLUMN 3
5	CATHODE ROW 4
6	ANODE COLUMN 5
7	CATHODE ROW 6
8	CATHODE ROW 3
9	CATHODE ROW 1
10	ANODE COLUMN 4
11	ANODE COLUMN 3
12	CATHODE ROW 4
13	ANODE COLUMN 1
14	CATHODE ROW 2

ABSOLUTE MAXIMUM RATING AT Ta=25°C

PARAMETER	MAXIMUM RATING	UNIT
Average Power Dissipation Per Dot	36	mW
Peak Forward Current Per Dot (1/10 Duty Cycle, 0.1 ms Pulse Width)	100	mA
Average Forward Current Per Dot Derating Linear From 25℃ Per Dot	13 0.17	mA mA/℃
Reverse Voltage Per Dot	5	V
Operating Temperature Range	-35℃ to +85℃	
Storage Temperature Range	-35℃ to +85℃	
Solder Temperature: max 260℃ for max 3sec at 1.6mm[1/16inch] below seating plane.		

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I_V	1780	4000		μcd	I_p=80mA 1/16Duty
Peak Emission Wavelength	λp		635		nm	I_F=20mA
Spectral Line Half-Width	Δλ		40		nm	I_F=20mA
Dominant Wavelength	λd		623		nm	I_F=20mA
Forward Voltage any Dot	V_F		2.0	2.6	V	I_F=20mA
			2.6	3.4	V	I_F=80mA
Reverse Current any Dot	I_R			100	μA	V_R=5V
Luminous Intensity Matching Ratio	I_V-m			2:1		I_p=80mA 1/16Duty

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

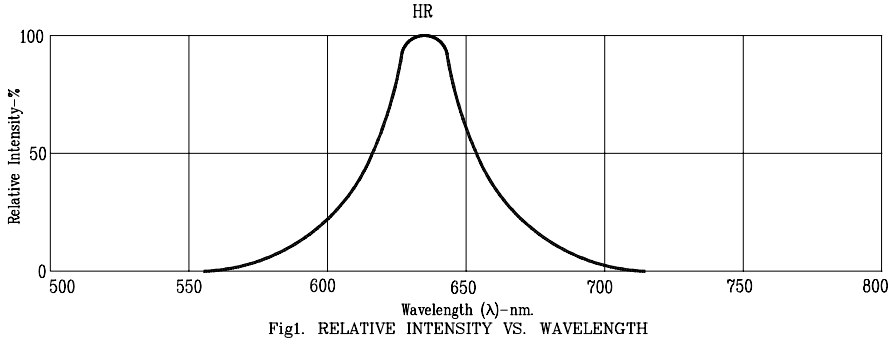

Fig1. RELATIVE INTENSITY VS. WAVELENGTH



Fig2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT (REFRESH RATE 1KHz)



Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE



Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT



Fig5. MAX. AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE.



Fig6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE: HR=HI-EFF. RED