



Complete 10 μ s CMOS 12-Bit ADC

MAX172

General Description

The MAX172 is a complete 12-Bit analog-to-digital converter (ADC) that combines high speed, low power consumption, and an on-chip voltage reference. The conversion time is 10 μ s. The buried zener reference provides low drift and low noise performance.


External component requirements are limited to only decoupling capacitors for the power supply and reference voltages. On-chip clock circuitry is also included which can either be driven from an external source, or in stand-alone applications, can be used with a crystal.

The MAX172 uses a standard microprocessor interface architecture. Three-state data outputs are controlled by Read (RD) and Chip Select (CS) inputs. Data access and bus release times of 90 and 75ns respectively ensure compatibility with most popular microprocessors without resorting to wait states.

Applications

Digital Signal Processing (DSP)
High Accuracy Process Control
High Speed Data Acquisition
Electro-Mechanical Systems

Functional Diagram

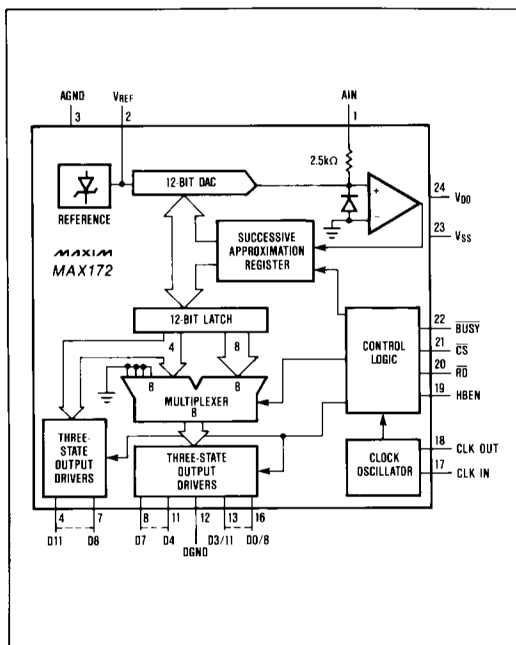

Features


- ◆ 12-Bit Resolution and Linearity
- ◆ 10 μ s Conversion Time
- ◆ No Missing Codes
- ◆ On-Chip Voltage Reference
- ◆ 90ns Access Time
- ◆ 215mW Max Power Consumption
- ◆ 24-Lead Narrow DIP Package
- ◆ Pin-for-Pin AD7572 Replacement

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	ERROR (LSB)	PKG CODE
MAX172ACNG	0°C to +70°C	24 Plastic DIP	± 0.5	N24-3
MAX172BCNG	0°C to +70°C	24 Plastic DIP	± 1	N24-3
MAX172ACWG	0°C to +70°C	24 Wide SO	± 0.5	W24-1
MAX172BCWG	0°C to +70°C	24 Wide SO	± 1	W24-1
MAX172CC/D	0°C to +70°C	Dice*	± 1	—
MAX172AENG	-40°C to +85°C	24 Plastic DIP	± 0.5	N24-3
MAX172BENG	-40°C to +85°C	24 Plastic DIP	± 1	N24-3
MAX172AMRG	-55°C to +125°C	24 CERDIP	± 0.5	R24-4
MAX172BMRG	-55°C to +125°C	24 CERDIP	± 1	R24-4

* Consult factory for dice specifications

Pin Configuration

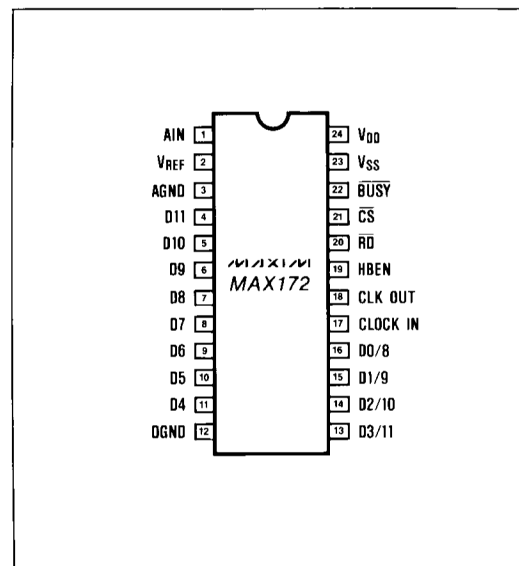
MAXIM

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Complete 10 μ s CMOS 12-Bit ADC

ABSOLUTE MAXIMUM RATINGS

V_{DD} to DGND	-0.3V to +7V
V_{SS} to DGND	+0.3V to -17V
AGND to DGND	-0.3V, V_{DD} + 0.3V
AIN to AGND	-15V to +15V
Digital Input Voltage to DGND	-0.3V, V_{DD} + 0.3V (Pins 17, 19-21)
Digital Output Voltage to DGND	-0.3V, V_{DD} + 0.3V (pins 4-11, 13-16, 18, 22)

Operating Temperature Ranges

MAX172XC	0°C to +70°C
MAX172XE	-40°C to +85°C
MAX172XM	-55°C to +125°C
Storage Temperature Range	-65°C to +160°C
Power Dissipation (any Package) to +75°C	1000mW
Derates Above +75°C by	10mW/°C
Lead Temperature (Soldering 10 seconds)	+300°C

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{DD} = +5V $\pm$ 5%, V_{SS} = -12V or -15V $\pm$ 5%; Slow Memory Mode; T_A = T_{MIN} to T_{MAX} unless otherwise noted, f_{CLK} = 1.25MHz)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS	
ACCURACY								
Resolution					12		Bits	
Integral NonLinearity	INL	MAX172A	T _A = 25°C			+ 1/2	LSB	
		MAX172AC/AE				+ 1/2		
		MAX172AM				+ 3/4		
		MAX172B				+ 1		
Differential NonLinearity	DNL	Guaranteed Monotonic Over Temp.				+ 1	LSB	
Offset Error (Note 1)		MAX172B	T _A = 25°C T _A = T _{MIN} to T _{MAX}			+ 4 + 6	LSB	
		MAX172A	T _A = 25°C T _A = T _{MIN} to T _{MAX}			+ 3 + 4		
Full Scale Error (Note 2)		MAX172B	T _A = 25°C			+ 15	LSB	
		MAX172A	T _A = 25°C			+ 10		
Full Scale Tempco (Notes 3, 4)						+ 45	ppm/°C	
ANALOG INPUT								
Input Voltage Range					0	5	V	
Input Current		AIN = 0V to +5V				3.5	mA	
INTERNAL REFERENCE								
V _{REF} Output Voltage		T _A = 25°C			-5.2	-5.25	-5.3	V
V _{REF} Output Tempco (Note 5)						40		ppm/°C
Output Current Sink Capability		(Note 6)				500		μA
LOGIC INPUTS								
Input Low Voltage	V _{IL}	CS, RD, HBEN, CLKIN				0.8		V
Input High Voltage	V _{IH}	CS, RD, HBEN, CLKIN			2.4			V
Input Capacitance (Note 7)	C _{IN}	CS, RD, HBEN, CLKIN				10		pF
Input Current	I _{IN}	CS, RD, HBEN CLKIN	VIN = 0 to V _{DD}			+ 10 + 20		μA
LOGIC OUTPUTS								
Output Low Voltage	V _{OL}	D11-D0/8, BUSY, CLKOUT I _{SINK} = 1.6mA				0.4		V
Output High Voltage	V _{OH}	D11-D0/8, BUSY, CLKOUT I _{SOURCE} = 200μA			4			V
Floating State Leakage Current	I _{LKG}	D11-D0/8, V _{OUT} = 0V to V _{DD}				+ 10		μA
Floating State Output Capacitance (Note 7)	C _{OUT}					15		pF

Complete 10 μ s CMOS 12-Bit ADC

MAX172

ELECTRICAL CHARACTERISTICS (Continued)

(V_{DD} = +5V $\pm$ 5%, V_{SS} = -12V or -15V $\pm$ 5%; Slow Memory Mode; T_A = T_{MIN} to T_{MAX} unless otherwise noted, f_{CLK} = 1.25MHz.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
CONVERSION TIME						
MAX172	t _{CONV}	Synchronous (12.5 clock cycles) Asynchronous (12 to 13 clock cycles)	9.6		10 10.4	μ s
POWER SUPPLY REJECTION						
V _{DD} Only		FS Change, V _{SS} = -15V, V _{DD} = 4.75V to 5.25V		$\pm$ 1/2		LSB
V _{SS} Only		FS Change, V _{DD} = 5V, V _{SS} = -5% to +5%		$\pm$ 1/8		LSB
POWER REQUIREMENTS						
V _{DD}		$\pm$ 5% for Specified Performance		5		V
V _{SS} (Note 8)		$\pm$ 5% for Specified Performance		-12 or -15		V
I _{DD}		CS = RD = V _{DD} , AIN = 5V		5	7	mA
I _{SS}		CS = RD = V _{DD} , AIN = 5V		8	12	mA
Power Dissipation		V _{DD} = +5V, V _{SS} = -15V		145	215	mW

Note 1: Typical change over temp is +1 LSB.

Note 2: V_{DD} = +5V, V_{SS} = -15V, FS = +5.000V, Ideal last code transition = FS - 3/2LSB.

Note 3: Full Scale TC = Δ FS/ Δ T, where Δ FS is full scale change from T_A = 25°C to T_{MIN} or T_{MAX}.

Note 4: Includes internal reference drift.

Note 5: V_{REF} TC = Δ V_{REF}/ Δ T, where Δ V_{REF} is reference voltage change from T_A = 25°C to T_{MIN} or T_{MAX}.

Note 6: Output current should not change during conversion.

Note 7: Guaranteed by design, not subject to test.

Note 8: Functional operation at V_{SS} = -12V + 5% is guaranteed by testing offset error and full scale error.

TIMING CHARACTERISTICS (Note 9)

(V_{DD} = +5V, V_{SS} = -12V or -15V; T_A = T_{MIN} to T_{MAX} unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	T _A = 25°C			MAX172C/E		MAX172M		UNITS
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
CS to RD Setup Time	t ₁		0			0		0		ns
RD to BUSY Delay	t ₂	C _L = 50pF		90	190		230		270	ns
Data Access Time (Note 10)	t ₃	C _L = 20pF C _L = 100pF		60 70	90 125		110 150		120 170	ns
RD Pulse Width	t ₄			t ₃			t ₃		t ₃	
CS to RD Hold Time	t ₅		0			0		0		ns
Data Setup Time After BUSY Note (10)	t ₆				70		90		100	ns
Bus Relinquish Time (Note 11)	t ₇		20		75	20	85	20	90	ns
HBEN to RD Setup Time	t ₈		0			0		0		ns
HBEN to RD Hold Time	t ₉		0			0		0		ns
Delay Between Read Operations	t ₁₀		200			200		200		ns

Note 9: Timing specifications are sample tested at 25°C to ensure compliance. All input control signals are specified with t_r = t_f = 5ns (10% to 90% of +5V) and timed from a voltage level of +1.6V.

Note 10: t₃ and t₆ are measured with the load circuits of Figure 1 and defined as the time required for an output to cross 0.8V or 2.4V.



Note 11: t₇ is defined as the time required for the data lines to change 0.5V when loaded with the circuits of Figure 2

For additional information on using the MAX172 please refer to MAX162 data sheet.

Complete 10 μ s CMOS 12-Bit ADC

Chip Topography


Package Information

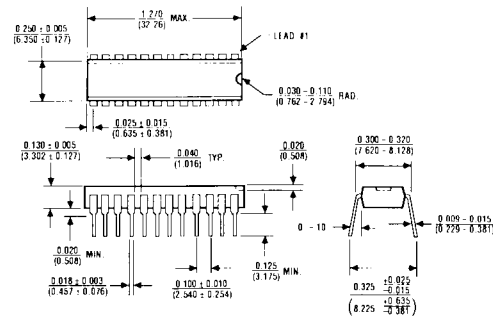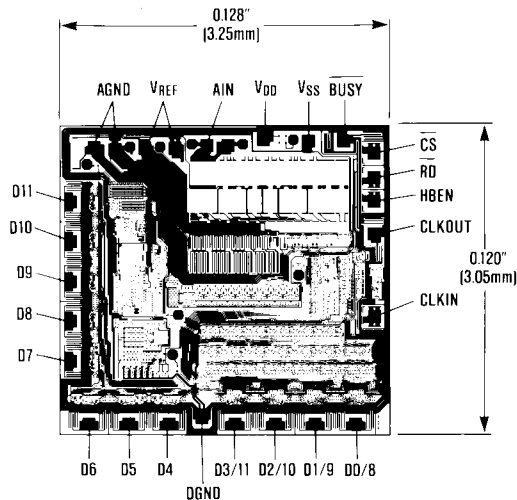

24 Lead Plastic Narrow DIP (NG)

$\theta_{JA} = 120^{\circ}\text{C/W}$


$\theta_{JC} = 60^{\circ}\text{C/W}$

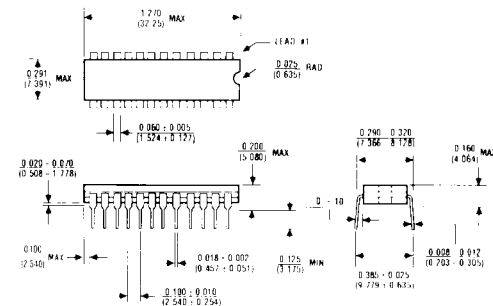

24 Lead Narrow Cerdip (RG)

$\theta_{JA} = 80^{\circ}\text{C/W}$

$\theta_{JC} = 40^{\circ}\text{C/W}$

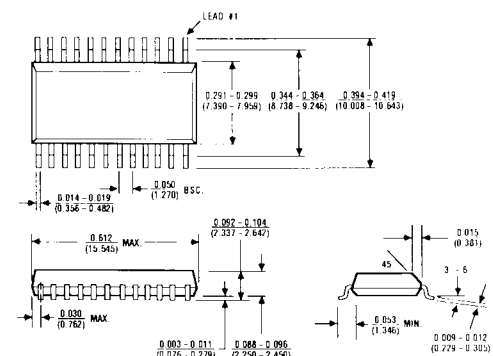

24 Lead Small Outline, Wide (WG)

$\theta_{JA} = 85^{\circ}\text{C/W}$

$\theta_{JC} = 45^{\circ}\text{C/W}$

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 **4**



 SITE
SEARCH

 PART NO.
SEARCH

WHAT'S NEW

PRODUCTS

SOLUTIONS

DESIGN

APPNOTES

SUPPORT

BUY

COMPANY

MEMBERS

MAX172

Part Number Table

Notes:

1. See the [MAX172 QuickView Data Sheet](#) for further information on this product family or download the [MAX172 full data sheet](#) (PDF, 1.5MB).
2. Other options and links for purchasing parts are listed at: <http://www.maxim-ic.com/sales>.
3. [Didn't Find What You Need?](#) Ask our applications engineers. Expert assistance in finding parts, usually within one business day.
4. Part number suffixes: T or T&R = tape and reel; + = RoHS/lead-free; # = RoHS/lead-exempt. More: See [full data sheet](#) or [Part Naming Conventions](#).
5. * Some packages have variations, listed on the drawing. "PkgCode/Variation" tells which variation the product uses.

Part Number	Free Sample	Buy Direct	Package: TYPE PINS SIZE DRAWING CODE/VAR *	Temp	RoHS/Lead-Free? Materials Analysis
MAX172AMRG/883B				-55C to +125C	RoHS/Lead-Free: No
MAX172BMRG/883B				-55C to +125C	RoHS/Lead-Free: No
MAX172BMRG				-55C to +125C	RoHS/Lead-Free: No
MAX172AMRG				-55C to +125C	RoHS/Lead-Free: No
MAX172BC/D					RoHS/Lead-Free: No
MAX172ACNG			PDIP;24 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: N24-3*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX172BCNG			PDIP;24 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: N24-3*	0C to +70C	RoHS/Lead-Free: No Materials Analysis

MAX172BCNG+			PDIP;24 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: N24+3*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX172ACNG+			PDIP;24 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: N24+3*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX172BENG			PDIP;24 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: N24-3*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX172AENG+			PDIP;24 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: N24+3*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
MAX172BENG+			PDIP;24 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: N24+3*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
MAX172AENG			PDIP;24 pin;.300" Dwg: 21-0043D (PDF) Use pkgcode/variation: N24-3*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX172ACWG+T			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24+1*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX172ACWG+			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24+1*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX172ACWG			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24-1*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX172BCWG+T			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24+1*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX172BCWG+			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24+1*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
MAX172ACWG-T			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24-1*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX172BCWG-T			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24-1*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX172BCWG			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24-1*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
MAX172BEWG+			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
MAX172AEWG+			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis

MAX172AEWG+T				-40C to +85C	RoHS/Lead-Free: Yes
MAX172BEWG-T			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX172BEWG			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX172AEWG-T				-40C to +85C	RoHS/Lead-Free: No
MAX172AEWG			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
MAX172BEWG+T			SOIC;24 pin;.300" Dwg: 21-0042B (PDF) Use pkgcode/variation: W24+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis

[Didn't Find What You Need?](#)

[CONTACT US: SEND US AN EMAIL](#)

Copyright 2007 by Maxim Integrated Products, Dallas Semiconductor • [Legal Notices](#) • [Privacy Policy](#)