

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939

Features


- Low Current Leakage
- Forward Current:IF=215mA.
- Small Outline Surface Mount Package
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking:JY

Maximum Ratings


- Operating Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Тур	Max	Units
V _{(BR)R}	Reverse Breakdown Voltage (I _R =100 µ A)	70			V
V _F	Forward Voltage I _F =1.0mA I _F =10mA I _F =50mA I _F =150mA	 	 	0.90 1.00 1.10 1.25	V
I _R	leakage current (V _R =75V)			5.0	nA
Cj	Junction Capacitance (V _R =0, f=1.0MHz)			2.0	pF
t _{rr}	Reverse recovery time			3.0	us

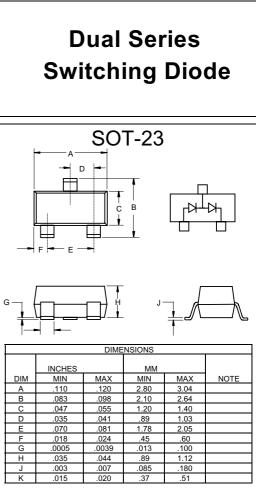


BAV199



www.mccsemi.com

BAV199



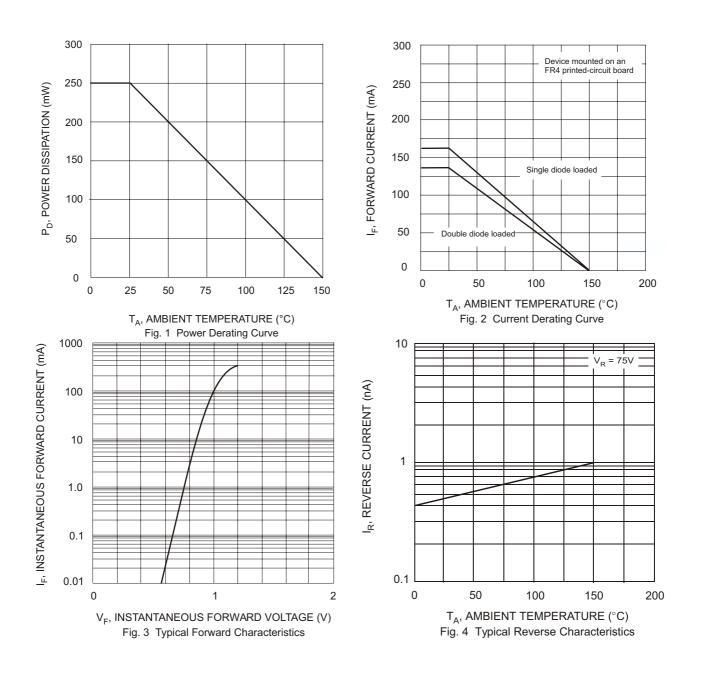

www.mccsemi.com

2006/05/19



Micro Commercial Components

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by Micro Commercial Components Corp. are not intended for use in Medical,

Aerospace or Military Applications.

