



e-MMC Memory

MTFC4GMWDM-3M AIT, MTFC4GMWDM-3M AIT A

MTFC8GLWDM-3M AIT Z, MTFC8GLWDM-AIT Z, MTFC8GLWDM-AIT A

MTFC16GLWDM-4M AIT Z, MTFC32GJWEF-4M AIT Z


Features

- MultiMediaCard (MMC) controller and NAND Flash
- 153-ball TFBGA and 169-ball TFBGA (RoHS compliant, "green package")
- V_{CC} : 2.7–3.6V
- V_{CCQ} (dual voltage): 1.65–1.95V; 2.7–3.6V
- Temperature ranges
 - Operating temperature: -40°C to $+85^{\circ}\text{C}$
 - Storage temperature: -40°C to $+85^{\circ}\text{C}$

MMC-Specific Features

- JEDEC/MMC standard version 4.51-compliant (JEDEC Standard No. 84-B451) – SPI mode not supported¹
 - Advanced 11-signal interface
 - x1, x4, and x8 I/Os, selectable by host
 - SDR/DDR modes up to 52 MHz clock speed
 - HS200 mode
 - Command classes: class 0 (basic); class 2 (block read); class 4 (block write); class 5 (erase); class 6 (write protection); class 7 (lock card)
 - Temporary write protection
 - Boot operation (high-speed boot)
 - Sleep mode
 - Replay-protected memory block (RPMB)
 - Secure erase and secure trim
 - Hardware reset signal
 - Multiple partitions with enhanced attribute
 - Permanent and power-on write protection
 - High-priority interrupt (HPI)

Figure 1: Micron e-MMC Device

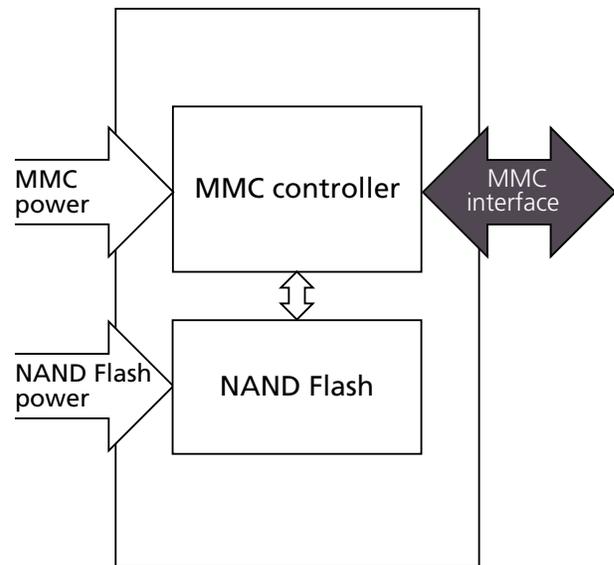

MMC-Specific Features (Continued)

- Background operation
- Reliable write
- Discard and sanitize
- Power-off notification feature
- Backward compatible with previous MMC
- ECC and block management implemented

Note: 1. The JEDEC specification is available at www.jedec.org/sites/default/files/docs/JESD84-B451.pdf.



e-MMC Performance

Table 1: HS200 Partition Performance

Condition ¹	Typical Values				Unit
	4GB	8GB	16GB	32GB	
Sequential write	15	15	25	37	MB/s
Sequential read	120	120	120	150	MB/s
Random write	500	500	900	900	IOPS
Random read	4500	4500	4000	4000	IOPS

Note: 1. Bus in x8 I/O and HS200 modes. Sequential access of chunk saturated; random access of 4KB chunk over 1GB span. Additional performance data, such as system performance on a specific application board, will be provided in a separate document upon customer request.

Table 2: 52 MHz DDR2 Performance

Condition ¹	Typical Values				Unit
	4GB	8GB	16GB	32GB	
Sequential Write	15	15	25	37	MB/s
Sequential Read	80	80	80	80	MB/s
Random Write	500	500	900	900	IOPS
Random Read	4000	4000	3700	3700	IOPS

Note: 1. Bus in x8 I/O and 52 MHz DDR2 modes. Sequential access of chunk saturated; random access of 4KB chunk over 1GB span. Additional performance data, such as system performance on a specific application board, will be provided in a separate document upon customer request.



e-MMC Current Consumption

Table 3: HS200 Current Consumption

Condition ¹	Typical Values (I_{CC}/I_{CCQ})			Unit
	4GB, 8GB	16GB	32GB	
Write	60/10	110/10	110/10	mA
Read	45/50	105/50	105/50	mA
Sleep	125	125	125	μ A
Auto-Standby	50/125	50/125	50/125	μ A

Note: 1. Bus in x8 I/O and HS200 modes. $V_{CC} = 3.6V$ and $V_{CCQ} = 1.95V$. 25°C. Measurements done as average RMS current consumption. I_{CCQ} in READ operation might be affected by tester load.

Table 4: 52 MHz DDR2 Current Consumption

Condition ¹	Typical Values (I_{CC}/I_{CCQ})			Unit
	4GB, 8GB	16GB	32GB	
Write	30/10	110/10	110/10	mA
Read	60/50	75/85	75/85	mA
Sleep	0/125	0/125	0/125	μ A
Auto-Standby	50/125	50/125	50/125	μ A

Note: 1. Bus in x8 I/O and 52 MHz DDR2 modes. $V_{CC} = 3.6V$ and $V_{CCQ} = 1.95V$. 25°C. Measurements done as average RMS current consumption. I_{CCQ} in READ operation might be affected by tester load.



Part Numbering Information

Micron® e-MMC memory devices are available in different configurations and densities.

Figure 2: e-MMC Part Numbering

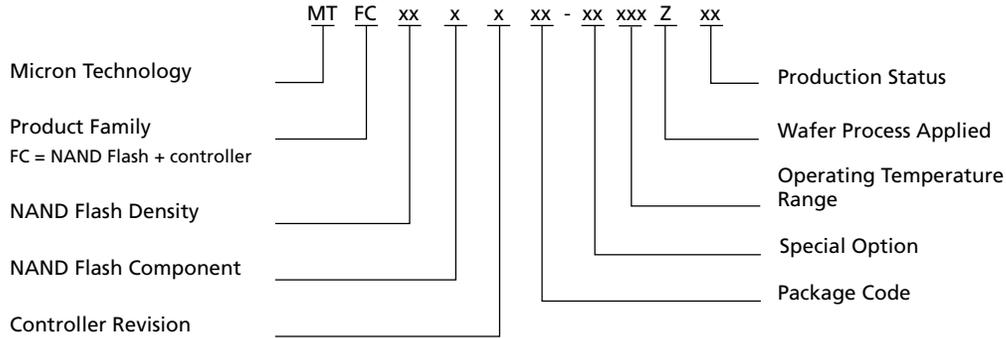


Table 5: Ordering Information

Base Part Number	Density	Package	Shipping
MTFC4GMWDM-3M AIT MTFC4GMWDM-3M AIT A	4GB	153-ball TFBGA 11.5mm x 13.0mm x 1.2mm	Tray Tape and reel
MTFC8GLWDM-AIT Z MTFC8GLWDM-AIT A	8GB	153-ball TFBGA 11.5mm x 13.0mm x 1.2mm	Tray Tape and reel
MTFC8GLWDM-3M AIT Z	8GB	153-ball TFBGA 11.5mm x 13.0mm x 1.2mm	Tray Tape and reel
MTFC16GLWDM-4M AIT Z	16GB	153-ball TFBGA 11.5mm x 13.0mm x 1.2mm	Tray Tape and reel
MTFC32GJWEF-4M AIT Z	32GB	169-ball TFBGA 14mm x 18mm x 1.2mm	Tray Tape and reel

Device Marking

Due to the size of the package, the Micron-standard part number is not printed on the top of the device. Instead, an abbreviated device mark consisting of a 5-digit alphanumeric code is used. The abbreviated device marks are cross-referenced to the Micron part numbers at the FBGA Part Marking Decoder site: www.micron.com/decoder.





Important Notes and Warnings

Micron Technology, Inc. ("Micron") reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions. This document supersedes and replaces all information supplied prior to the publication hereof. You may not rely on any information set forth in this document if you obtain the product described herein from any unauthorized distributor or other source not authorized by Micron.

Automotive Applications. Products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets. Distributor and customer/distributor shall assume the sole risk and liability for and shall indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting directly or indirectly from any use of non-automotive-grade products in automotive applications. Customer/distributor shall ensure that the terms and conditions of sale between customer/distributor and any customer of distributor/customer (1) state that Micron products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets and (2) require such customer of distributor/customer to indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting from any use of non-automotive-grade products in automotive applications.

Critical Applications. Products are not authorized for use in applications in which failure of the Micron component could result, directly or indirectly in death, personal injury, or severe property or environmental damage ("Critical Applications"). Customer must protect against death, personal injury, and severe property and environmental damage by incorporating safety design measures into customer's applications to ensure that failure of the Micron component will not result in such harms. Should customer or distributor purchase, use, or sell any Micron component for any critical application, customer and distributor shall indemnify and hold harmless Micron and its subsidiaries, subcontractors, and affiliates and the directors, officers, and employees of each against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, or death arising in any way out of such critical application, whether or not Micron or its subsidiaries, subcontractors, or affiliates were negligent in the design, manufacture, or warning of the Micron product.

Customer Responsibility. Customers are responsible for the design, manufacture, and operation of their systems, applications, and products using Micron products. ALL SEMICONDUCTOR PRODUCTS HAVE INHERENT FAILURE RATES AND LIMITED USEFUL LIVES. IT IS THE CUSTOMER'S SOLE RESPONSIBILITY TO DETERMINE WHETHER THE MICRON PRODUCT IS SUITABLE AND FIT FOR THE CUSTOMER'S SYSTEM, APPLICATION, OR PRODUCT. Customers must ensure that adequate design, manufacturing, and operating safeguards are included in customer's applications and products to eliminate the risk that personal injury, death, or severe property or environmental damages will result from failure of any semiconductor component.

Limited Warranty. In no event shall Micron be liable for any indirect, incidental, punitive, special or consequential damages (including without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort, warranty, breach of contract or other legal theory, unless explicitly stated in a written agreement executed by Micron's duly authorized representative.



General Description

Micron e.MMC is a communication and mass data storage device that includes a Multi-MediaCard (MMC) interface, a NAND Flash component, and a controller on an advanced 11-signal bus, which is compliant with the MMC system specification. Its cost per bit, small package sizes, and high reliability make it an ideal choice for automotive applications, including information and entertainment, navigation tools, advanced driving assistance systems, and a variety of other industrial and portable products.

The nonvolatile e.MMC draws no power to maintain stored data, delivers high performance across a wide range of operating temperatures, and resists shock and vibration disruption.



Signal Descriptions

Table 6: Signal Descriptions


Symbol	Type	Description
CLK	Input	Clock: Each cycle of the clock directs a transfer on the command line and on the data line(s). The frequency can vary between the minimum and the maximum clock frequency.
RST_n	Input	Reset: The RST_n signal is used by the host for resetting the device, moving the device to the pre-idle state. By default, the RST_n signal is temporarily disabled in the device. The host must set ECSD register byte 162, bits[1:0] to 0x1 to enable this functionality before the host can use it.
CMD	I/O	Command: This signal is a bidirectional command channel used for command and response transfers. The CMD signal has two bus modes: open-drain mode and push-pull mode (see Operating Modes). Commands are sent from the MMC host to the device, and responses are sent from the device to the host.
DAT[7:0]	I/O	Data I/O: These are bidirectional data signals. The DAT signals operate in push-pull mode. By default, after power-on or assertion of the RST_n signal, only DAT0 is used for data transfer. The MMC controller can configure a wider data bus for data transfer either using DAT[3:0] (4-bit mode) or DAT[7:0] (8-bit mode). e.MMC includes internal pull-up resistors for data lines DAT[7:1]. Immediately after entering the 4-bit mode, the device disconnects the internal pull-up resistors on the DAT[3:1] lines. Upon entering the 8-bit mode, the device disconnects the internal pull-ups on the DAT[7:1] lines.
V _{CC}	Supply	V _{CC} : NAND interface (I/F) I/O and NAND Flash power supply.
V _{CCQ}	Supply	V _{CCQ} : e.MMC controller core and e.MMC I/F I/O power supply.
V _{SS} ¹	Supply	V _{SS} : NAND I/F I/O and NAND Flash ground connection.
V _{SSQ} ¹	Supply	V _{SSQ} : e.MMC controller core and e.MMC I/F ground connection.
V _{DDIM}		Internal voltage node.
NC	–	No connect: No internal connection is present.
RFU	–	Reserved for future use: No internal connection is present. Leave it floating externally.

Note: 1. V_{SS} and V_{SSQ} are connected internally.



153-Ball Signal Assignments

Figure 3: 153 Ball (Top View, Ball Down)

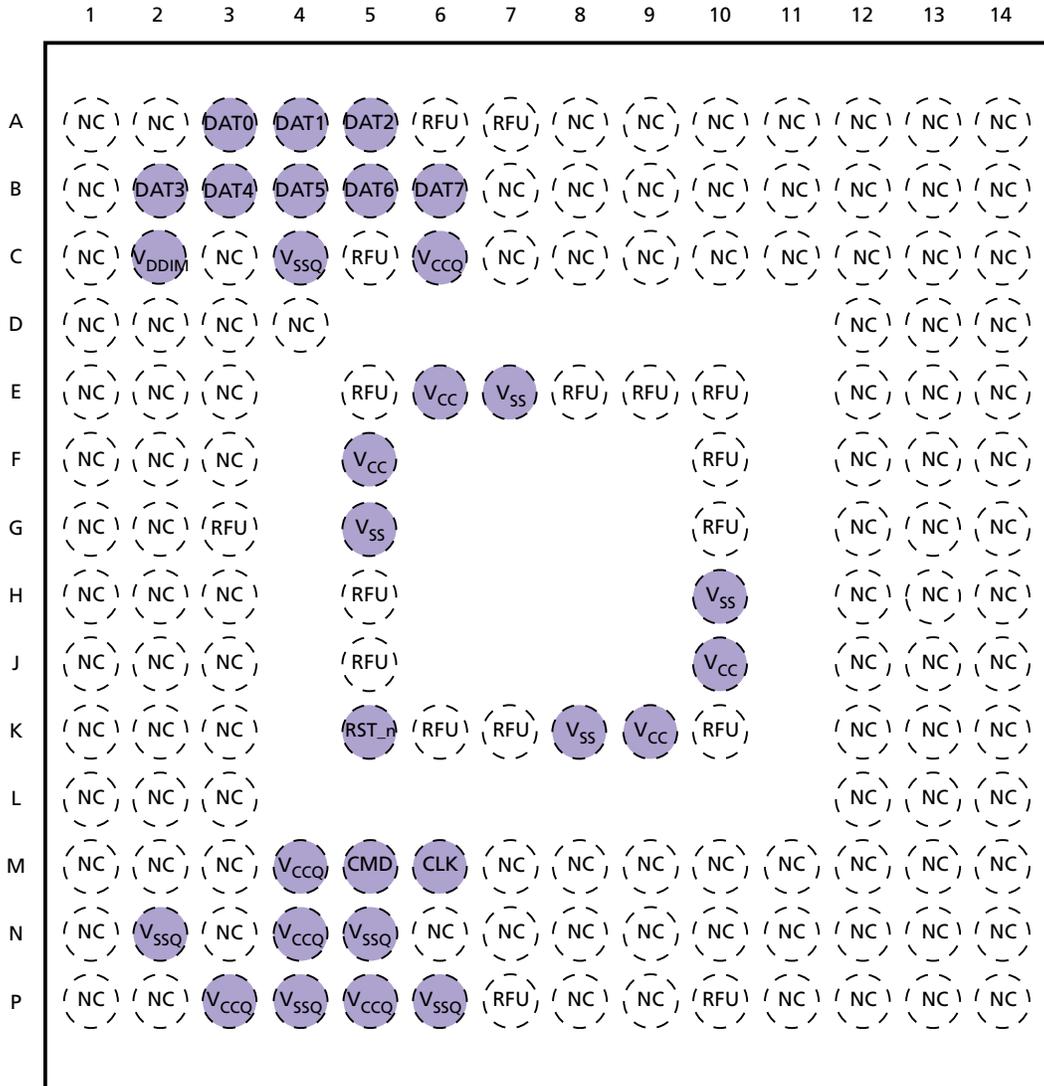


- Notes:
1. Some previous versions of the JEDEC product or mechanical specification had defined reserved for future use (RFU) balls as no connect (NC) balls. NC balls assigned in the previous specifications could have been connected to ground on the system board. To enable new feature introduction, some of these balls are assigned as RFU in the v4.4 mechanical specification. Any new PCB footprint implementations should use the new ball assignments and leave the RFU balls floating on the system board.
 2. V_{CC}, V_{CCQ}, V_{SS}, and V_{SSQ} balls must all be connected on the system board.



169-Ball Signal Assignments

Figure 4: 169 Ball (Top View, Ball Down)

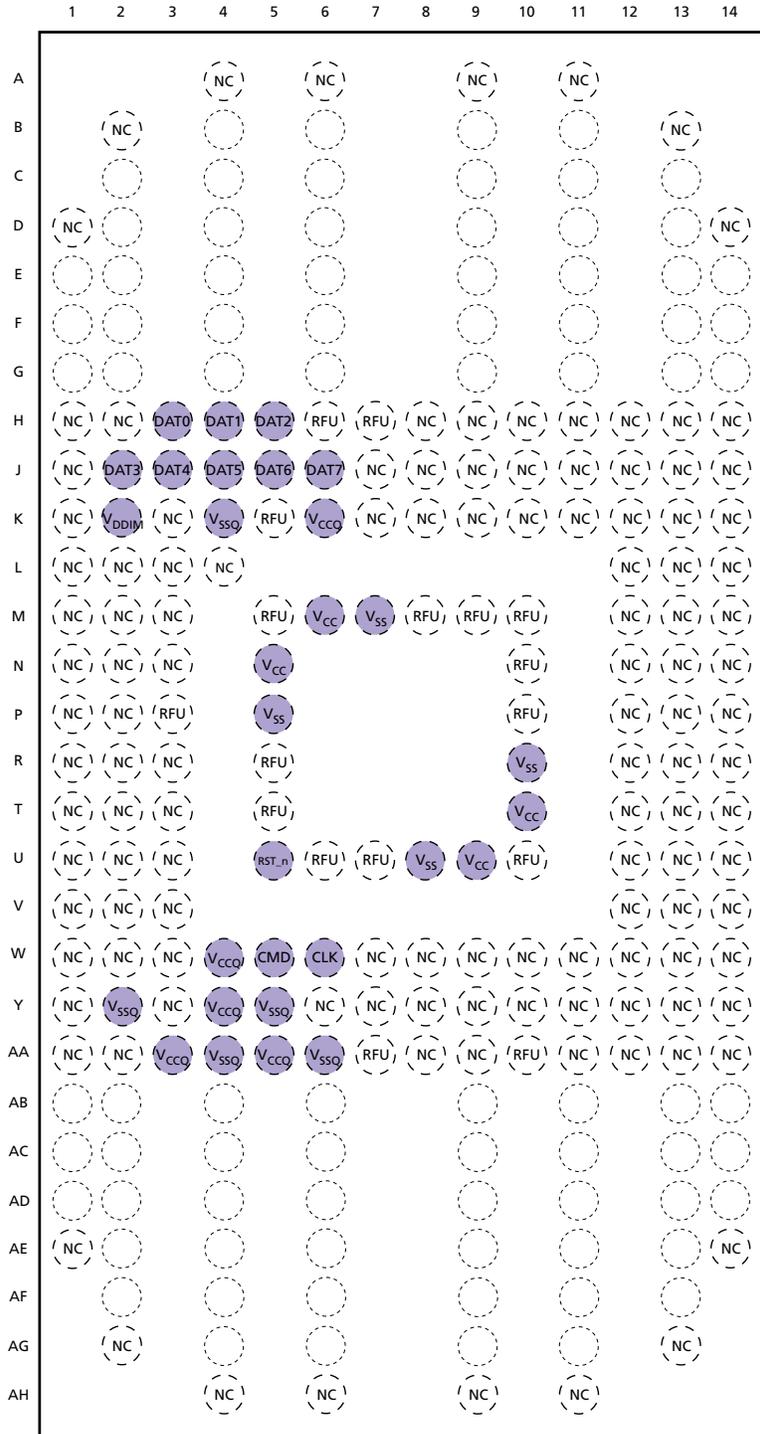

Notes: 1. Empty balls do not denote actual solder balls; they are position indicators only.




4GB, 8GB, 16GB, 32GB: e-MMC 169-Ball Signal Assignments

2. Some previous versions of the JEDEC product or mechanical specification had defined reserved for future use (RFU) balls as no connect (NC) balls. NC balls assigned in the previous specifications could have been connected to ground on the system board. To enable new feature introduction, some of these balls are assigned as RFU in the v4.4 mechanical specification. Any new PCB footprint implementations should use the new ball assignments and leave the RFU balls floating on the system board.
3. V_{CC} , V_{CCQ} , V_{SS} , and V_{SSQ} balls must all be connected on the system board.



Package Dimensions


Figure 5: 153-Ball TFBGA – 11.50mm x 13.00mm x 1.2mm (Package Code: DM)

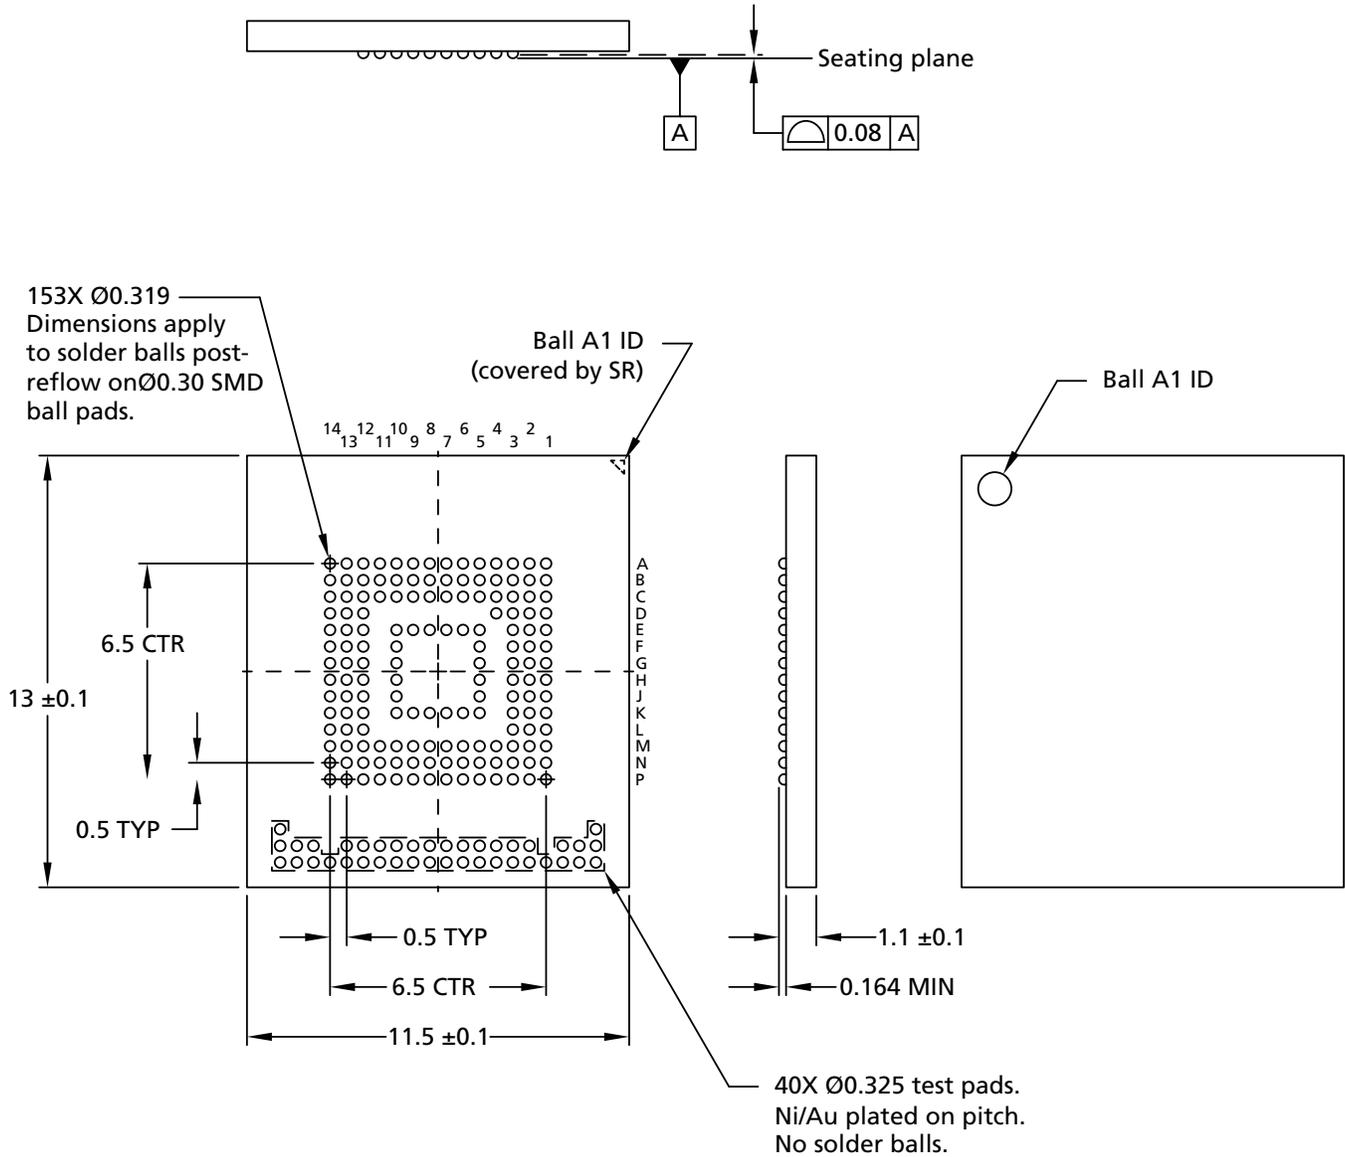

Note: 1. Dimensions are in millimeters.




Figure 6: 169-Ball TFBGA - 14mm x 18mm x 1.2mm (Package Code: EF)

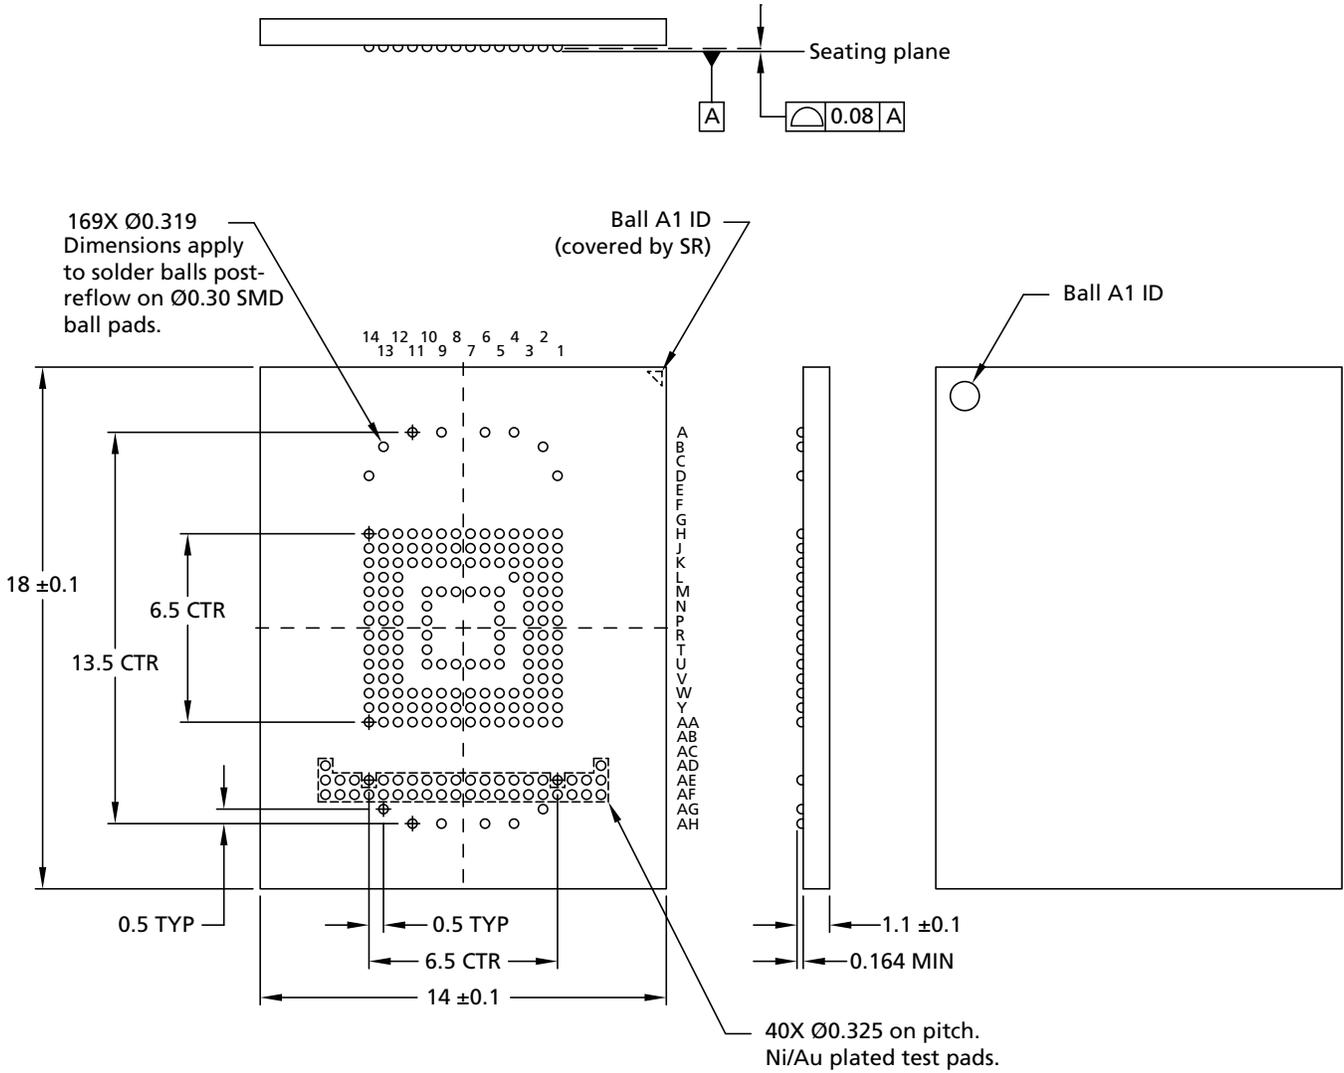

Note: 1. Dimensions are in millimeters.

Architecture

Figure 7: e.MMC Functional Block Diagram

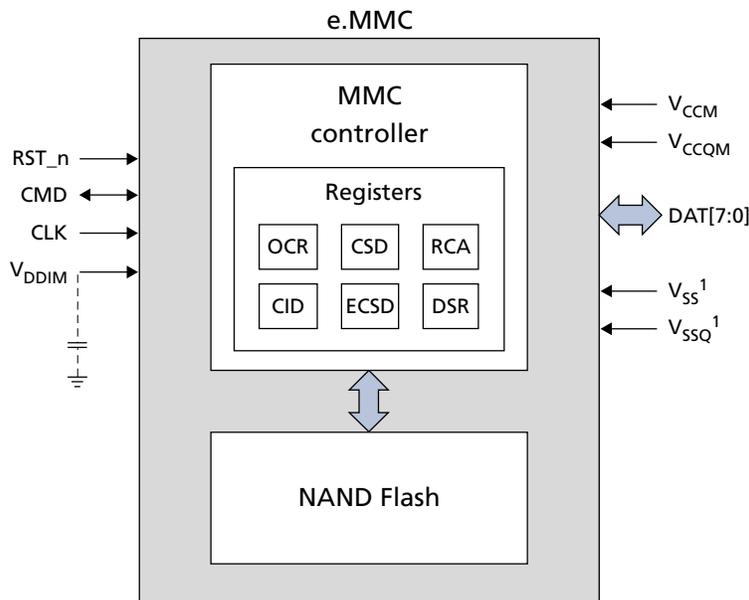

Note: 1. V_{SS} and V_{SSQ} are internally connected.

MMC Protocol Independent of NAND Flash Technology

The MMC specification defines the communication protocol between a host and a device. The protocol is independent of the NAND Flash features included in the device. The device has an intelligent on-board controller that manages the MMC communication protocol.

The controller also handles block management functions such as logical block allocation and wear leveling. These management functions require complex algorithms and depend entirely on NAND Flash technology (generation or memory cell type).

The device handles these management functions internally, making them invisible to the host processor.

Defect and Error Management

Micron e.MMC incorporates advanced technology for defect and error management. If a defective block is identified, the device completely replaces the defective block with one of the spare blocks. This process is invisible to the host and does not affect data space allocated for the user.

The device also includes a built-in error correction code (ECC) algorithm to ensure that data integrity is maintained.

To make the best use of these advanced technologies and ensure proper data loading and storage over the life of the device, the host must exercise the following precautions:

- Check the status after WRITE, READ, and ERASE operations.
- Avoid power-down during WRITE and ERASE operations.



OCR Register

The 32-bit operation conditions register (OCR) stores the voltage profile of the card and the access mode indication. In addition, this register includes a status information bit.

Table 7: OCR Parameters

OCR Bits	OCR Value	Description
[31]	1b (ready)/0b (busy) ¹	Device power-on status bit
[30:29]	10b	Sector mode
[28:24]	0 0000b	Reserved
[23:15]	1 1111 1111b	2.7–3.6V voltage range
[14:8]	000 0000b	2.0–2.7V voltage range
[7]	1b	1.70–1.95V voltage range
[6:0]	000 0000b	Reserved

Note: 1. OCR = C0FF8080h after the device has completed power-up.



CID Register

The card identification (CID) register is 128 bits wide. It contains the device identification information used during the card identification phase as required by e.MMC protocol. Each device is created with a unique identification number.

Table 8: CID Register Field Parameters

Name	Field	Width	CID Bits	CID Value
Manufacturer ID	MID	8	[127:120]	FEh
Reserved	–	6	[119:114]	–
Card/BGA	CBX	2	[113:112]	01h
OEM/application ID	OID	8	[111:104]	–
Product name	PNM	48	[103:56]	–
Product revision	PRV	8	[55:48]	–
Product serial number	PSN	32	[47:16]	–
Manufacturing date	MDT	8	[15:8]	–
CRC7 checksum	CRC	7	[7:1]	–
Not used; always 1	–	1	[0]	–



CSD Register

The card-specific data (CSD) register provides information about accessing the device contents. The CSD register defines the data format, error correction type, maximum data access time, and data transfer speed, as well as whether the DSR register can be used. The programmable part of the register (entries marked with W or E in the following table) can be changed by the PROGRAM_CSD (CMD27) command.

Table 9: CSD Register Field Parameters

Name	Field	Size (Bits)	Cell Type ¹	CSD Bits	CSD Value	
CSD structure	CSD_STRUCTURE	2	R	[127:126]	03h	
System specification version	SPEC_VERS	4	R	[125:122]	04h	
Reserved ²	–	2	–	[121:120]	–	
Data read access time 1	TAAC	8	R	[119:112]	6Eh	
Data read access time 2 in CLK cycles (NSAC × 100)	NSAC	8	R	[111:104]	01h	
Maximum bus clock frequency	TRAN_SPEED	8	R	[103:96]	32h	
Card command classes ³	CCC	12	R	[95:84]	0F5h	
Maximum read data block length	READ_BL_LEN	4	R	[83:80]	09h	
Partial blocks for reads supported	READ_BL_PARTIAL	1	R	[79]	0h	
Write block misalignment	WRITE_BLK_MISALIGN	1	R	[78]	0h	
Read block misalignment	READ_BLK_MISALIGN	1	R	[77]	0h	
DSR implemented ⁴	DSR_IMP	1	R	[76]	1h	
Reserved	–	2	–	[75:74]	–	
Device size	C_SIZE	12	R	[73:62]	FFFh	
Maximum read current at V _{DD,min}	VDD_R_CURR_MIN	3	R	[61:59]	07h	
Maximum read current at V _{DD,max}	VDD_R_CURR_MAX	3	R	[58:56]	07h	
Maximum write current at V _{DD,min}	VDD_W_CURR_MIN	3	R	[55:53]	07h	
Maximum write current at V _{DD,max}	VDD_W_CURR_MAX	3	R	[52:50]	07h	
Device size multiplier	C_SIZE_MULT	3	R	[49:47]	07h	
Erase group size	ERASE_GRP_SIZE	5	R	[46:42]	1Fh	
Erase group size multiplier	ERASE_GRP_MULT	5	R	[41:37]	1Fh	
Write protect group size	WP_GRP_SIZE	4GB-3M	5	R	[36:32]	07h
		8GB				0Fh
		8GB-3M				1Fh
		32GB-4M				1Fh
16GB-4M	1Fh					
Write protect group enable	WP_GRP_ENABLE	1	R	[31]	1h	
Manufacturer default ECC	DEFAULT_ECC	2	R	[30:29]	00h	
Write-speed factor	R2W_FACTOR	3	R	[28:26]	04h	
Maximum write data block length	WRITE_BL_LEN	4	R	[25:22]	09h	
Partial blocks for writes supported	WRITE_BL_PARTIAL	1	R	[21]	0h	


Table 9: CSD Register Field Parameters (Continued)

Name	Field	Size (Bits)	Cell Type ¹	CSD Bits	CSD Value
Reserved	–	4	–	[20:17]	–
Content protection application	CONTENT_PROT_APP	1	R	[16]	0h
File-format group	FILE_FORMAT_GRP	1	R/W	[15]	0h
Copy flag (OTP)	COPY	1	R/W	[14]	0h
Permanent write protection	PERM_WRITE_PROTECT	1	R/W	[13]	0h
Temporary write protection	TMP_WRITE_PROTECT	1	R/W/E	[12]	0h
File format	FILE_FORMAT	2	R/W	[11:10]	00h
ECC	ECC	2	R/W/E	[9:8]	00h
CRC	CRC	7	R/W/E	[7:1]	–
Reserved	–	1	–	[0]	–

- Notes:
1. R = Read-only;
R/W = One-time programmable and readable;
R/W/E = Multiple writable with value kept after a power cycle, assertion of the RST_n signal, and any CMD0 reset, and readable
 2. Reserved bits should be read as 0.
 3. CMD0 restriction: CMD0 (SW RESET) is not supported during programming command. If SW RESET is issued during programming commands, a power cycle is required.
 4. The $I_{PEAK, max}$ driving capability can be modified according to the actual capacitive load on the e-MMC interface signals in the user application board using CMD4. In HS200 mode, the driver strength value is set in EXT_CSD[185] using CMD6.

CMD4 Argument	Driving Capability (mA)
0x01000000	4
0x02000000	8
0x04000000	12
0x08000000	16
0x10000000	20
0x20000000	24
0x40000000	28
0x80000000	32



ECSD Register

The 512-byte extended card-specific data (ECSD) register defines device properties and selected modes. The most significant 320 bytes are the properties segment. This segment defines device capabilities and cannot be modified by the host. The lower 192 bytes are the modes segment. The modes segment defines the configuration in which the device is working. The host can change the properties of modes segments using the SWITCH command.

Table 10: ECSD Register Field Parameters

Name	Field	Size (Bytes)	Cell Type ¹	ECSD Bytes	ECSD Value
Properties Segment					
Reserved ²	–	7	–	[511:505]	–
Supported command sets	S_CMD_SET	1	R	[504]	01h
HPI features	HPI_FEATURES	1	R	[503]	03h
Background operations support	BKOPS_SUPPORT	1	R	[502]	01h
Max-packed read commands	MAX_PACKED_READS	1	R	[501]	3Fh
Max-packed write commands	MAX_PACKED_WRITES	1	R	[500]	3Fh
Data tag support	DATA_TAG_SUPPORT	1	R	[499]	–
Tag unit size	TAG_UNIT_SIZE	1	R	[498]	–
Tag resources size	TAG_RES_SIZE	1	R	[497]	–
Context management capabilities	CONTEXT_CAPABILITIES	1	R	[496]	–
Large unit size	LARGE_UNIT_SIZE_M1	1	R	[495]	–
Extended partitions attribute support	EXT_SUPPORT	1	R	[494]	–
Reserved	–	241	–	[493:253]	–
Cache size	CACHE_SIZE	4	R	[252:249]	–
Generic CMD6 timeout	GENERIC_CMD6_TIME	1	R	[248]	19h
Power-off notification (long) timeout	POWER_OFF_LONG_TIM	1	R	[247]	FFh
Background operations status	BKOPS_STATUS	1	R	[246]	00h
Number of correctly programmed sectors	CORRECTLY_PROG_SECTORS_NUM	4	R	[245:242]	0000000h
First initialization time after partitioning (first CMD1 to device ready)	INI_TIMEOUT_AP	1	R	[241]	32h
Reserved	–	1	–	[240]	–
Power class for 52 MHz, DDR at 3.6V	PWR_CL_DDR_52_360	1	R	[239]	04h
Power class for 52 MHz, DDR at 1.95V	PWR_CL_DDR_52_195	1	R	[238]	09h
Power class for 200 MHz at 1.95V	PWR_CL_200_195	1	R	[237]	09h
Power class for 200 MHz, at 1.3V	PWR_CL_200_130	1	R	[236]	–
Minimum write performance for 8-bit at 52 MHz in DDR mode	MIN_PERF_DDR_W_8_52	1	R	[235]	00h
Minimum read performance for 8-bit at 52 MHz in DDR mode	MIN_PERF_DDR_R_8_52	1	R	[234]	00h


Table 10: ECSD Register Field Parameters (Continued)

Name	Field		Size (Bytes)	Cell Type ¹	ECSD Bytes	ECSD Value
Reserved	-		1	-	[233]	-
TRIM multiplier	TRIM_MULT	4GB-3M	1	R	[232]	03h
		8GB-3M				
		8GB				
		32GB-4M				
		16GB-4M				0Fh
						0Fh
Secure feature support	SEC_FEATURE_SUPPORT		1	R	[231]	55h
Secure erase multiplier	SEC_ERASE_MULT	4GB-3M	1	R	[230]	02h
		8GB				
		8GB-3M				
		32GB-4M				
		16GB-4M				06h
						02h
Secure trim multiplier	SEC_TRIM_MULT	4GB-3M	1	R	[229]	03h
		8GB				
		8GB-3M				
		16GB-4M				
		32GB-4M				03h
						09h
Boot information	BOOT_INFO		1	R	[228]	07h
Reserved	-		1	-	[227]	-
Boot partition size	BOOT_SIZE_MULT	4GB-3M	1	R	[226]	40h
		8GB-3M				
		8GB				
		16GB-4M				
		32GB-4M				
						20h
						80h
						80h
Access size	ACC_SIZE	4GB-3M	1	R	[225]	06h
		8GB				
		8GB-3M				
		16GB-4M				
		32GB-4M				07h
						08h
High-capacity erase unit size	HC_ERASE_GRP_SIZE	4GB-3M	1	R	[224]	08h
		8GB				
		8GB-3M				
		16GB-4M				
		32GB-4M				10h
						20h
High-capacity erase timeout	ERASE_TIMEOUT_MULT		1	R	[223]	01h
Reliable write-sector count	REL_WR_SEC_C		1	R	[222]	01h


Table 10: ECSD Register Field Parameters (Continued)

Name	Field	Size (Bytes)	Cell Type ¹	ECSD Bytes	ECSD Value	
High-capacity write protect group size	HC_WP_GRP_SIZE	4GB-3M	1	R	[221]	01h
		8GB-3M				02h
		8GB				02h
		16GB-4M				02h
	32GB-4M				02h	
Sleep current (V _{CC})	S_C_VCC	1	R	[220]	06h	
Sleep current (V _{CCQ})	S_C_VCCQ	1	R	[219]	09h	
Reserved	–	1	–	[218]	–	
Sleep/awake timeout	S_A_TIMEOUT	1	R	[217]	10h	
Reserved	–	1	–	[216]	–	
Sector count	SEC_COUNT	4GB-3M	4	R	[215:212]	724000h
		8GB-3M				E80000h
		8GB				E88000h
		16GB-4M				1CF0000h
		32GB-4M				3A00000h
Reserved	–	1	–	[211]	–	
Minimum write performance for 8-bit at 52 MHz	MIN_PERF_W_8_52	1	R	[210]	08h	
Minimum read performance for 8-bit at 52 MHz	MIN_PERF_R_8_52	1	R	[209]	08h	
Minimum write performance for 8-bit at 26 MHz and 4-bit at 52 MHz	MIN_PERF_W_8_26_4_52	1	R	[208]	08h	
Minimum read performance for 8-bit at 26 MHz and 4-bit at 52 MHz	MIN_PERF_R_8_26_4_52	1	R	[207]	08h	
Minimum write performance for 4-bit at 26 MHz	MIN_PERF_W_4_26	1	R	[206]	08h	
Minimum read performance for 4-bit at 26 MHz	MIN_PERF_R_4_26	1	R	[205]	08h	
Reserved	–	1	–	[204]	–	
Power class for 26 MHz at 3.6V	PWR_CL_26_360	1	R	[203]	02h	
Power class for 52 MHz at 3.6V	PWR_CL_52_360	1	R	[202]	02h	
Power class for 26 MHz at 1.95V	PWR_CL_26_195	1	R	[201]	05h	
Power class for 52 MHz at 1.95V	PWR_CL_52_195	1	R	[200]	05h	
Partition switching timing	PARTITION_SWITCH_TIME	1	R	[199]	01h	
Out-of-interrupt busy timing	OUT_OF_INTERRUPT_TIME	1	R	[198]	04h	
I/O driver strength	DRIVER_STRENGTH	1	R	[197]	0Fh	
Card type	CARD_TYPE	1	R	[196]	17h	
Reserved	–	1	–	[195]	–	
CSD structure version	CSD_STRUCTURE	1	R	[194]	02h	


Table 10: ECSD Register Field Parameters (Continued)

Name	Field	Size (Bytes)	Cell Type ¹	ECSD Bytes	ECSD Value
Reserved	–	1	–	[193]	–
Extended CSD revision	EXT_CSD_REV	1	R	[192]	06h
Modes Segment					
Command set	CMD_SET	1	R/W/E_P	[191]	00h
Reserved	–	1	–	[190]	–
Command set revision	CMD_SET_REV	1	R	[189]	00h
Reserved	–	1	–	[188]	–
Power class	POWER_CLASS	1	R/W/E_P	[187]	00h
Reserved	–	1	–	[186]	–
High-speed interface timing ³	HS_TIMING	1	R/W/E_P	[185]	00h
Reserved	–	1	–	[184]	–
Bus width mode	BUS_WIDTH	1	W/E_P	[183]	00h
Reserved	–	1	–	[182]	–
Erased memory content	ERASED_MEM_CONT	1	R	[181]	00h
Reserved	–	1	–	[180]	–
Partition configuration	PARTITION_CONFIG	1	R/W/E, R/W/E_P	[179]	00h
Boot configuration protection	BOOT_CONFIG_PROT	1	R/W, R/W/C_P	[178]	00h
Boot bus width	BOOT_BUS_WIDTH	1	R/W/E	[177]	00h
Reserved	–	1	–	[176]	–
High-density erase group definition	ERASE_GROUP_DEF	1	R/W/E_P	[175]	00h
Boot write protection status registers	BOOT_WP_STATUS	1	R	[174]	–
Boot area write protection register	BOOT_WP	1	R/W, R/W/C_P	[173]	00h
Reserved	–	1	–	[172]	–
User write protection register	USER_WP	1	R/W, R/W/ C_P, R/W/E_P	[171]	00h
Reserved	–	1	–	[170]	–
Firmware configuration	FW_CONFIG	1	R/W	[169]	00h
RPMB size	RPMB_SIZE_MULT	1	R	[168]	01h
Write reliability setting register ⁴	WR_REL_SET	1	R/W	[167]	1Fh
Write reliability parameter register	WR_REL_PARAM	1	R	[166]	05h
SANITIZE START operation	SANITIZE_START	1	W/E_P	[165]	–
Manually start background operations	BKOPS_START	1	W/E_P	[164]	00h


Table 10: ECSD Register Field Parameters (Continued)

Name	Field	Size (Bytes)	Cell Type ¹	ECSD Bytes	ECSD Value	
Enable background operations hand-shake	BKOPS_EN	1	R/W	[163]	00h	
Hardware reset function	RST_n_FUNCTION	1	R/W	[162]	00h	
HPI management	HPI_MGMT	1	R/W/E_P	[161]	00h	
Partitioning support	PARTITIONING_SUPPORT	1	R	[160]	03h	
Maximum enhanced area size	MAX_ENH_SIZE_MULT	4GB-3M	3	R	[159:157]	0001C9h
		8GB-3M				0001D0h
		8GB				0001D1h
		16GB-4M				0001CFh
		32GB-4M				0001D0h
Partitions attribute	PARTITIONS_ATTRIBUTE	1	R/W	[156]	00h	
Partitioning setting	PARTITION_SETTING_COMPLETED	1	R/W	[155]	00h	
General-purpose partition size	GP_SIZE_MULT_GP3	12	R/W	[154:152]	000000h	
	GP_SIZE_MULT_GP2			[151:149]	000000h	
	GP_SIZE_MULT_GP1			[148:146]	000000h	
	GP_SIZE_MULT_GP0			[145:143]	000000h	
Enhanced user data area size	ENH_SIZE_MULT	3	R/W	[142:140]	000000h	
Enhanced user data start address	ENH_START_ADDR	4	R/W	[139:136]	00000000h	
Reserved	–	1	–	[135]	–	
Bad block management mode	SEC_BAD_BLK_MGMNT	1	R/W	[134]	00h	
Reserved	–	1	–	[133]	–	
Package case temperature is controlled	TCASE_SUPPORT	1	W/E_P	[132]	–	
Periodic wake-up	PERIODIC_WAKEUP	1	R/W/E	[131]	–	
Program CID/CSD in DDR mode support	PROGRAM_CID_CSD_DDR_SUPPORT	1	R	[130]	01h	
Reserved	–	2	TBD	[129:128]	–	
Vendor specific fields	VENDOR_SPECIFIC_FIELD	64	<vendor specific>	[127:64]	–	
Native sector size	NATIVE_SECTOR_SIZE	1	R	[63]	–	
Sector size emulation	USE_NATIVE_SECTOR	1	R/W	[62]	–	
Sector size	DATA_SECTOR_SIZE	1	R	[61]	–	
1st initialization after disabling sector size emulation	INI_TIMEOUT_EMU	1	R	[60]	–	
Class 6 commands control	CLASS_6_CTRL	1	R/W/E_P	[59]	–	
Number of addressed group to be released	DYNCAP_NEEDED	1	R	[58]	–	
Exception events control	EXCEPTION_EVENTS_CTRL	2	R/W/E_P	[57:56]	–	


Table 10: ECSD Register Field Parameters (Continued)

Name	Field	Size (Bytes)	Cell Type ¹	ECSD Bytes	ECSD Value
Exception events status	EXCEPTION_EVENTS_STATUS	2	R	[55:54]	–
Extended partitions attribute	EXT_PARTITIONS_ATTRIBUTE	2	R/W	[53:52]	–
Context configuration	CONTEXT_CONF	15	R/W/E_P	[51:37]	–
Packed command status	PACKED_COMMAND_STATUS	1	R	[36]	–
Packed command failure index	PACKED_FAILURE_INDEX	1	R	[35]	–
Power-off notification	POWER_OFF_NOTIFICATION	1	R/W/E_P	[34]	–
Control to turn the Cache ON/OFF	CACHE_CTRL	1	R/W/E_P	[33]	–
Flushing of the cache	FLUSH_CACHE	1	W/E_P	[32]	–
Reserved	–	32	TBD	[31:0]	–

- Notes:
1. R = Read-only;
R/W = One-time programmable and readable;
R/W/E = Multiple writable with the value kept after a power cycle, assertion of the RST_n signal, and any CMD0 reset, and readable;
R/W/C_P = Writable after the value is cleared by a power cycle and assertion of the RST_n signal (the value not cleared by CMD0 reset) and readable;
R/W/E_P = Multiple writable with the value reset after a power cycle, assertion of the RST_n signal, and any CMD0 reset, and readable;
W/E_P = Multiple writable with the value reset after power cycle, assertion of the RST_n signal, and any CMD0 reset, and not readable
 2. Reserved bits should be read as 0.
 3. ^tIH parameter in HS200 is 1.2ns. Refer to the JEDEC specification for the device input timing diagram.
 4. Micron has tested power failure under best-application knowledge conditions with positive results. Customers may request a dedicated test for their specific application condition. Micron set this register during factory test and used the one-time programming option.



DC Electrical Specifications – Device Power

The device current consumption for various device configurations is defined in the power class fields of the ECSD register.

V_{CC} is used for the NAND Flash device and its interface voltage; V_{CCQ} is used for the controller and the e.MMC interface voltage.

Figure 8: Device Power Diagram

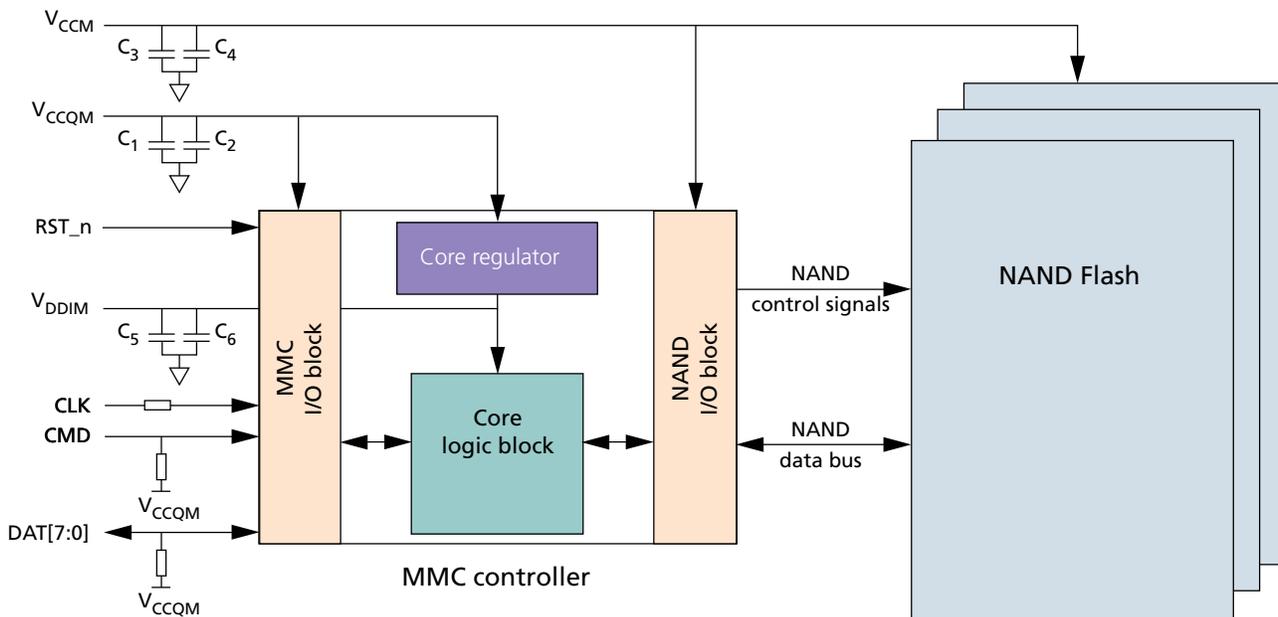


Table 11: Absolute Maximum Ratings

Parameters	Symbol	Min	Max	Unit
Voltage input	V_{IN}	-0.6	4.6	V
V_{CC} supply	V_{CC}	-0.6	4.6	V
V_{CCQ} supply	V_{CCQ}	-0.6	4.6	V
Storage temperature	T_{STG}	-40	85	°C

Note: 1. Voltage on any pin relative to V_{SS} .


Table 12: Capacitor and Resistance Specifications

Parameter	Symbol	Typ	Units	Notes
Pull-up resistance: CMD	R_CMD	10	kΩ	1
Pull-up resistance: DAT[7:0]	R_DAT	50	kΩ	1
Pull-up resistance: RST_n	R_RST_n	50	kΩ	2
CLK/CMD/DAT[7:0] impedance		50	Ω	3
Serial resistance on CLK	SR_CLK	22	Ω	
V _{CCQ} capacitor	C1	2.2	μF	4
	C2	0.1		
V _{CC} capacitor (≤8GB)	C3	2.2	μF	5
	C4	0.1		
V _{CC} capacitor (>8GB)	C3	4.7	μF	5
	C4	0.22		
V _{DDIM} capacitor (C _{reg})	C5	1	μF	6
	C6	0.1		

- Notes:
- Used to prevent bus floating.
 - If host does not use H/W RESET (RST_n), pull-up resistance is not needed on RST_n line (Extended_CSD[162] = 00h).
 - Impedance match.
 - The coupling capacitor should be connected with V_{CCQ} and V_{SSQ} as closely as possible.
 - The coupling capacitor should be connected with V_{CC} and V_{SS} as closely as possible.
 - The coupling capacitor should be connected with V_{DDIM} and V_{SS} as closely as possible.

Product Revision

The table below lists JEDEC v4.51 features not supported in the specified product revision. See the full JEDEC/MMC Standard No. 84-B451 specification at www.jedec.org/sites/default/files/docs/JESD84-B451.pdf for more details regarding v4.51 features.

Table 13: Product Revision

Product Revision	JEDEC Features Not Supported
1.x	Real-time clock, dynamic device capacity, extended partition types, context IDs, data tag, cache, thermal specification, native sector size, extended security protocols, packed command



Revision History

Rev. H – 1/19

- Added MPNs

Rev. G – 08/18

- Added Important Notes and Warnings section for further clarification aligning to industry standards

Rev. F – 07/15

- Changed ACC_SIZE value in ECSD Register for 16GB and 32GB device
- Changed note 3 of the ECSD Register from output to input timing diagram

Rev. E – 03/15

- Updated the values in the *e*-MMC Performance
- Replaced the V_{DDIM} description in the Signal Descriptions table to: "Internal voltage node"
- Changed 1.3ns to 1.2ns in note 3 of the ECSD Register Field Parameters table

Rev. D – 06/14

- Updated the values in the *e*-MMC Performance and *e*-MMC Consumption tables
- Replaced the V_{DDIM} description in the Signal Descriptions table to: "At least 0.1 μ F + 1 μ F capacitors are required to connect V_{DDIM} to ground"
- Updated the *e*-MMC Part Numbering Information figure
- Updated the ECSD Register table with new ECSD values
- Changed 1.1ns to 1.4ns in note 3 of the ECSD Register Field Parameters table

Rev. C – 11/13

- Added 169-ball and associated information
- Removed Boot Operation table

Rev. B – 07/13

- Updated Current Consumption table
- Updated Boot Operation table
- Updated the following register values: ECSD[226], ECSD[215:212], ECSD[159:157]
- Deleted note 5 for the ECSD Register Field Parameters table

Rev. A – 05/13

- Initial release



8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-4000
www.micron.com/products/support Sales inquiries: 800-932-4992
Micron and the Micron logo are trademarks of Micron Technology, Inc.
All other trademarks are the property of their respective owners.

This data sheet contains minimum and maximum limits specified over the power supply and temperature range set forth herein.
Although considered final, these specifications are subject to change, as further product development and data characterization some-
times occur.