




1

2


3

4

5

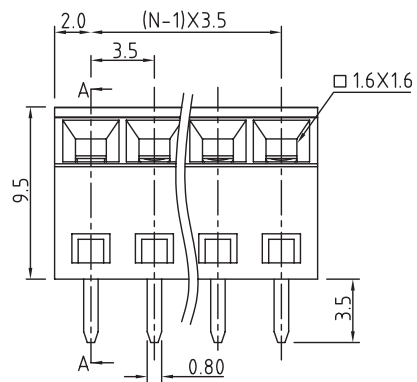

SECTION A-A

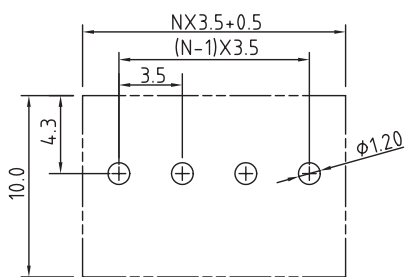

PCB LAYOUT - COMPONENT VIEW

## TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR: PA 66  
 FLAMABILITY RATING: UL94-V0  
 COLOR: GREEN  
 METAL HOUSING: BRASS (CuZn)  
 TERMINAL SCREW SLOT TYPE: "-"  
 CONTACT: BRASS  
 SOLDER TAIL PLATING: TIN

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40 UP TO 105°C  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
 CURRENT RATING: 10A  
 WORKING VOLTAGE: 300VAC  
 WITHSTANDING VOLTAGE: 1.6KV  
 CONTACT RESISTANCE: 20 mOhm max

STANDARD  
 RoHS CERTIFIED E315414 / MODEL NUMBER 2211

MECHANICAL  
 SOLID WIRE: 28-16AWG / 0.08-1.3MM<sup>2</sup>  
 STRANDED WIRE: 28-16AWG / 0.08-1.3MM<sup>2</sup>  
 TORQUE: □ □ 1.7Lb-In / 0.20Nm

WIRE STRIPE LENGTH: 5-6MM  
 SCREW: M2.0  
 PITCH: 3.5MM


SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 2211

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW: MARVIN

DESCRIPTION: SERIE 2211 - 3.5MM 55° ENTRY MODULAR WITH  
 RISING CAGE CLAMP - 1.3MM<sup>2</sup> WIRES WR-TBL

WERI PART NO: 691 221 120 0xx

SIZE

A4

G			
F			
E			
D			
C			
B	31-MAR-10	55° ENTRY	JP
A	12-OCT-09	PDF □ □	JP
REV	DATE	FILE	BY