




PRODUCT NUMBER: 0881-2-15-20-82-14-11-0

0881-X-15-20-82-14-11-0

Power spring pin, Double action, .090 Max. combined stroke
Mount between parallel circuit boards

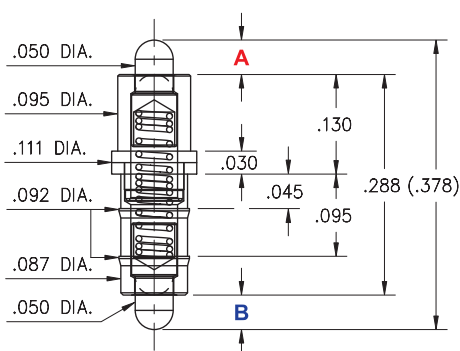

Basic Part Number	FULL Stroke (A)	FULL Stroke (B)
0881-1	.045±.005	.045±.005
0881-2	.030±.005	.060±.005

Standard Tolerances:
Lengths: $\pm .006$
Diameters: $\pm .002$
Angles: $\pm 2^\circ$

DESCRIPTION

Double Action Spring-Loaded Pin

Durability:

100,000 to 1,000,000 Cycles @ Mid-Stroke

Current Rating:

See Spring Derating Curve

Operating Temperature Range:

-55/+125° C

Vibration:

No Elect. Discontinuity > 1μs @ 10-2000HZ, 20 G

Shock:

No Elect. Discontinuity > 1μs @ 50g

Mounting Feature:

Press-Fit into a Non-Plated Through Hole (NPTH) or Insulator

Packaging: 15 - Packaged in Bulk

Shell Plating

20 μ" Gold over Nickel

Spring Plating

10 μ" Gold over Nickel

ROHS

RoHS-2
2011/65/EU

SPRING:

#82 SPRING HIGH FORCE SPRING



Full Stroke Capability : .090"± .005" [2,29 ± 0,127]

Spring Material : Stainless Steel 302

Force @ Mid. Stroke : 120 g ± 20 g

Mid. Stroke : .045" [1,14]

Initial Force (Pre-Load) : 25 g

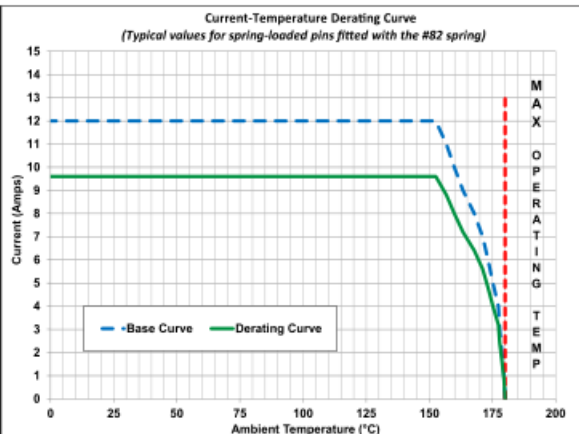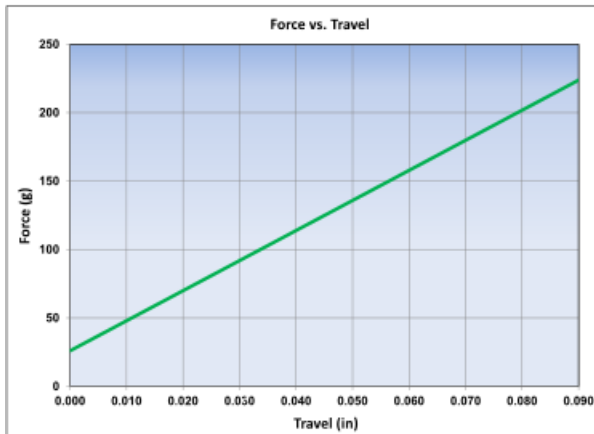

The stroke, force and current rating values are measured using spring pins with an internal construction per the design specification. Individual spring pin performance may vary from these values based on design differences.

Material	Stainless Steel	Grams Force	120
Max Stroke	0.09		

Maximum Current 12A @ 30° C Temp. Rise

Maximum Operating Temp @ Max Current 150.00° C

20% De-rated Maximum Current 9.60A

Contact Resistance 20.00mΩ Max

CONTACT MATERIAL:

Stainless Steel 302/304 per ASTM A313

This is an austenitic stainless steel round wire especially for the manufacturing of springs. It is a grade that is age hardenable with superior corrosion resistance.

PHYSICAL PROPERTIES

- Density: 0.29 lb/in³ (8.03 g/cm³)
- Tensile Strength: 325 – 355 ksi

CHEMICAL PROPERTIES (%)

- Carbon: .08 max
- Manganese: 2.00 max.
- Phosphorus: .045 max.
- Sulfur: .030 max.
- Silicon: 1.00 max.
- Chromium: 18.0 – 20.0
- Nickel: 8.0 – 10.5

STANDARD TOLERANCES ON PCB TERMINAL PINS & RECEPTACLES

Diameters +/- .002"

Lengths +/- .005"

Angles +/- 2°

STANDARD TOLERANCES ON SPRING-LOADED PINS


Diameters +/- .002"

Lengths +/- .006"

Angles +/- 2°

ADDITIONAL NOTES & SPECIFICATIONS

In the interest of improved design, quality and performance , Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

 © 2021 Mill-Max Mfg. Corp.
190 Pine Hollow Rd , Oyster Bay, NY 11771, USA
Phone: 516.922.6000