


6W isolated DC-DC converter in SIP package
Wide input and regulated single output

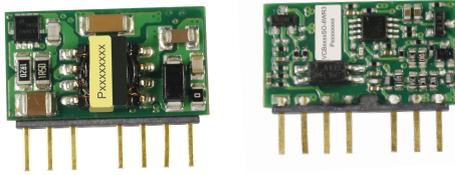

FEATURES

- Wide 2:1 input voltage range
- High efficiency up to 85%
- No-load power consumption as low as 0.14W
- I/O isolation test voltage: 1.5k VDC
- Input under-voltage protection, output short-circuit, over-current protection
- Operating ambient temperature range: -40°C to +85°C
- Industry standard pin-out

VCB48_SO-6WR3 series are isolated 6W DC-DC converter products with a wide 2:1 input voltage range. They feature efficiencies of up to 85%, 1500VDC input to output isolation voltage, operating ambient temperature of -40°C to +85°C, input under-voltage, output short-circuit, over-current protection. They are widely used in applications such as communications, medical, industrial controls, electric power, instrumentation and so on.

Selection Guide

| Certification | Part No. | Input Voltage (VDC) | | Output | | Full Load Efficiency ^② (%) Min./Typ. | Capacitive Load (μF)Max. |
|---------------|----------------|---------------------|-------------------|--------------|---------------------------|--|-----------------------------|
| | | Nominal (Range) | Max. ^① | Voltage(VDC) | Current (mA) Max./Min. | | |
| EN/BS EN | VCB4805SO-6WR3 | 48 (36-75) | 80 | 5 | 1200/0 | 79/81 | 1000 |
| | VCB4812SO-6WR3 | | | 12 | 500/0 | 81/83 | 470 |
| | VCB4815SO-6WR3 | | | 15 | 400/0 | 82/84 | 330 |
| | VCB4824SO-6WR3 | | | 24 | 250/0 | 83/85 | 100 |

Notes:
① Exceeding the maximum input voltage may cause permanent damage;
② Efficiency is measured at nominal input voltage and rated output load.

Input Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------------|------------------------|---|-------|--------|------|
| Input Current (full load / no-load) | Nominal input voltage | -- | 155/3 | 159/12 | mA |
| Reflected Ripple Current | | -- | 50 | -- | |
| Surge Voltage (1sec. max.) | | -0.7 | -- | 80 | VDC |
| Start-up Voltage | | -- | -- | 36 | |
| Under-voltage Protection | | 25 | 28 | -- | |
| Input Filter | | Capacitance filter | | | |
| Hot Plug | | Unavailable | | | |
| Ctrl * | Module on | Ctrl pin open or pulled high(3.5-12VDC) | | | |
| | Module off | Ctrl pin pulled low to GND(0-1.2VDC) | | | |
| | Input current when off | -- | 3 | 10 | mA |

Note: *The voltage of Ctrl pin is relative to input pin GND.

Output Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit | |
|-------------------------------|--|-----------|------|------|------|---|
| Voltage Accuracy ^① | 5% -100% load | -- | ±1 | ±3 | % | |
| Linear Regulation | Full load, the input voltage is from low to high | -- | ±0.5 | ±1 | | |
| Load Regulation | 0% -100% load | -- | ±0.5 | ±1.5 | | |
| Transient Recovery Time | | -- | 300 | 500 | μs | |
| Transient Response Deviation | 25% load step change, nominal input voltage | 5V output | -- | ±5 | ±8 | % |
| | | Others | -- | ±2.5 | ±5 | |

| | | | | | |
|-----------------------------|--------------------------------|---------------------------|-----|-------|-------|
| Temperature Coefficient | Full load | -- | -- | ±0.03 | %/°C |
| Ripple & Noise ^② | 20MHz bandwidth, 5% -100% load | -- | 100 | 200 | mVp-p |
| Over-current Protection | Input voltage range | 110 | 160 | 250 | %Io |
| Short-circuit Protection | Input voltage range | Continuous, self-recovery | | | |

Notes : ①Output voltage accuracy at <5% load is ±4% max;
 ②Ripple & Noise at <5% load is 350mV max. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|---|--|------|------|---------|
| Isolation | Input-output electric strength test for 1 minute with a leakage current of 1mA max. | 1500 | -- | -- | VDC |
| Insulation Resistance | Input-output resistance at 500VDC | 1000 | -- | -- | MΩ |
| Isolation Capacitance | Input-output capacitance at 100kHz/0.1V | -- | 1000 | -- | pF |
| Operating Temperature | Derating when operating temperature ≥50°C | -40 | -- | +85 | °C |
| Storage Humidity | Non-condensing | 5 | -- | 95 | %RH |
| Storage Temperature | | -55 | -- | +125 | °C |
| Pin Soldering Resistance Temperature | Soldering spot is 1.5mm away from PCB for 10 seconds | -- | -- | +260 | |
| Vibration | | 10-150Hz, 5G, 0.75mm. along X, Y and Z | | | |
| Switching Frequency * | PWM mode | -- | 460 | -- | kHz |
| MTBF | MIL-HDBK-217F@25°C | 1000 | -- | -- | k hours |

Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.



Mechanical Specifications

| | |
|----------------|--|
| Dimensions | 22.00 x 12.80 x 8.20 mm |
| Weight | 2.2g (Typ.) |
| Cooling Method | Nature convection or forced convection |

Electromagnetic Compatibility (EMC)

| | | | | |
|-----------|-------|-----------------|--|------------------|
| Emissions | CE | CISPR32/EN55032 | CLASS B (see Fig. 3-② for recommended circuit) | |
| | RE | CISPR32/EN55032 | CLASS B (see Fig. 3-② for recommended circuit) | |
| Immunity | ESD | IEC/EN61000-4-2 | Contact ±4kV | perf. Criteria B |
| | RS | IEC/EN61000-4-3 | 10V/m | perf. Criteria A |
| | EFT | IEC/EN61000-4-4 | ±2kV (see Fig. 3-① for recommended circuit) | perf. Criteria B |
| | Surge | IEC/EN61000-4-5 | ±2kV (see Fig. 3-① for recommended circuit) | perf. Criteria B |
| | CS | IEC/EN61000-4-6 | 3 Vr.m.s | perf. Criteria A |

Typical Characteristic Curves

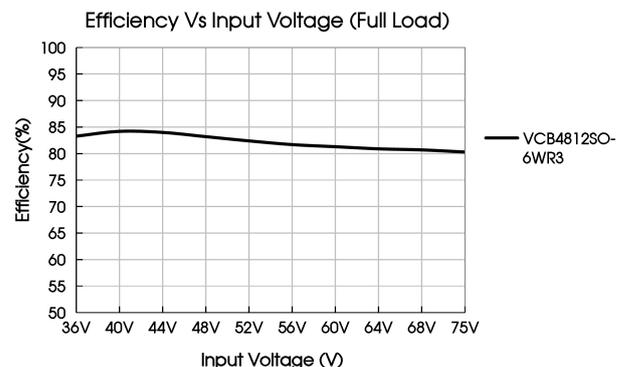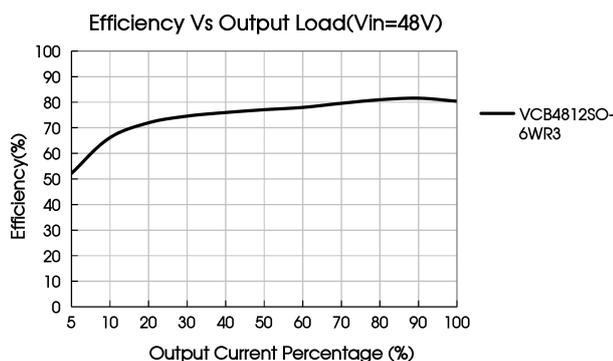

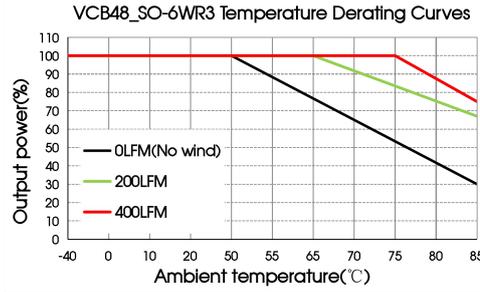


Fig. 1

Design Reference

1. Typical application

All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Fig. 2

| C_{in} | C_{out} |
|--------------------|----------------|
| 10-47 μ F/100V | 10 μ F/50V |

2. EMC solution-recommended circuit

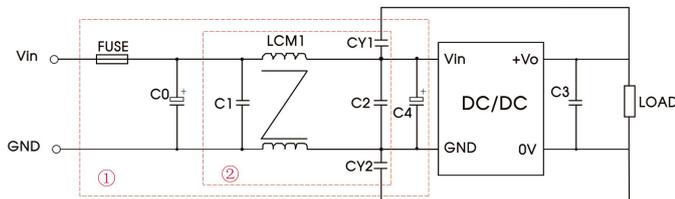


Fig. 3

Note: For EMC tests we use Part ① in Fig. 3 and part ② for emissions test. Selecting based on needs.

Parameter description:


| Model | VCB48_SO-6WR3 |
|---------|---|
| FUSE | Selected based on the actual input current in application |
| C0/C4 | 470 μ F/100V |
| C1/ C2 | 4.7 μ F/100V |
| C3 | 10 μ F/50V |
| LCM1 | 4.7mH (FL2D-10-472) |
| CY1/CY2 | 1nF/400VAC |

3. The products do not support parallel connection of their output

4. For additional information please refer to DC-DC converter application notes on

www.mornsun-power.com

Dimensions and Recommended Layout

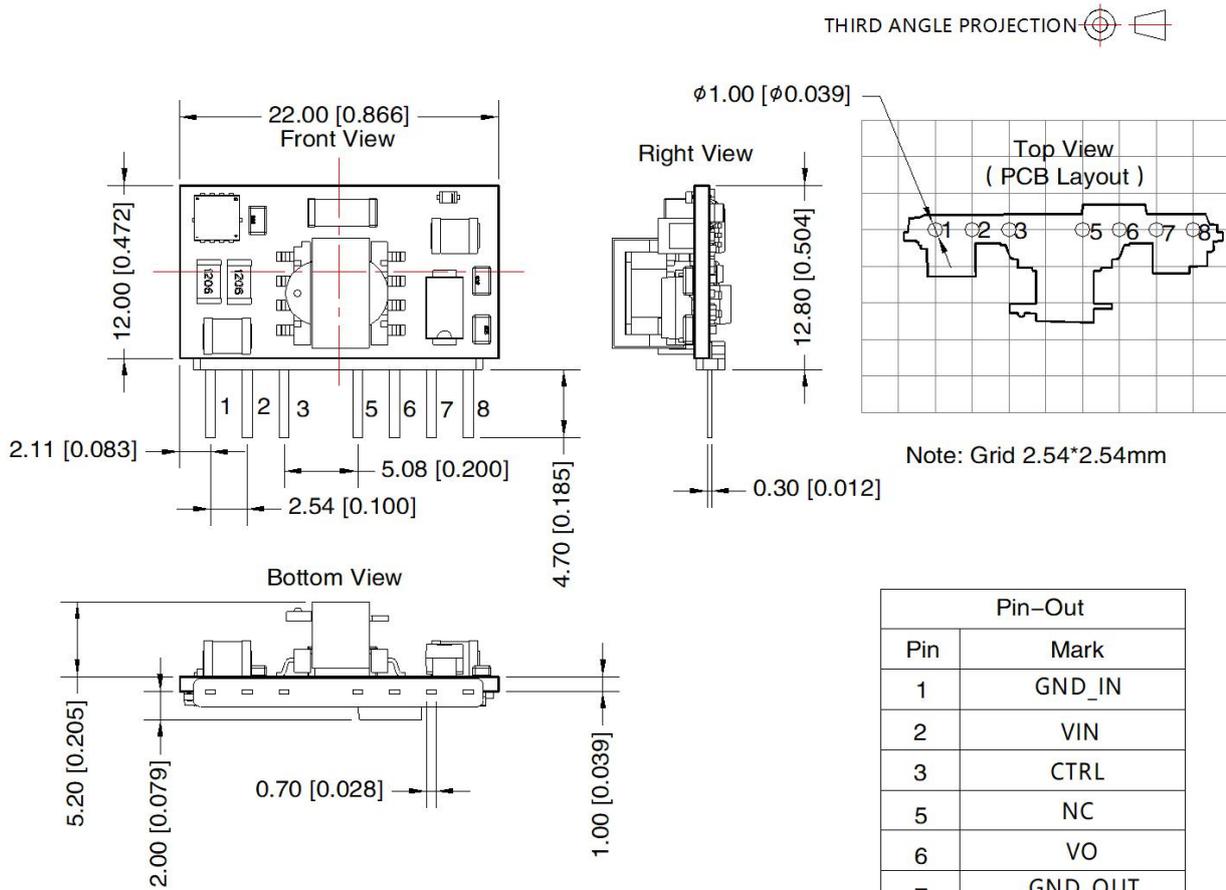

| Pin-Out | |
|---------|---------|
| Pin | Mark |
| 1 | GND_IN |
| 2 | VIN |
| 3 | CTRL |
| 5 | NC |
| 6 | VO |
| 7 | GND_OUT |
| 8 | NC |

Note:
Unit: mm[inch]
General tolerances: ± 0.50 [± 0.020]
The layout of the device is for reference only,
please refer to the actual product

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58210103;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com