


10W isolated DC-DC converter in SIP package
Ultra-wide input and regulated single output



RoHS Patent Protection



EN62368-1 BS EN62368-1

URB_S-10WR3 series of isolated 10W DC-DC converter products have an ultra-wide 4:1 input voltage and feature efficiencies of up to 88%, input to output isolation is tested with 1500VDC and the converters safely operate in an ambient temperature of -40°C to +85°C, input under-voltage protection, output short-circuit, over-current protection and they are widely used in applications such as medical care, industrial control, electric power, instruments and communication fields.

FEATURES

- Ultra-wide 4:1 input voltage range
- High efficiency up to 88%
- I/O isolation test voltage 1.5k VDC
- High power density
- Input under-voltage protection, output short-circuit, over-current protection
- Operating ambient temperature range: -40°C to +85°C
- Compact SIP package
- Industry standard pin-out

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency ^② (%) Min./Typ.	Capacitive Load (μF)Max.
		Nominal (Range)	Max. ^①	Voltage(VDC)	Current (mA) Max./Min.		
EN/BS EN	URB2403S-10WR3	24 (9-36)	40	3.3	2400/0	82/84	2200
	URB2405S-10WR3			5	2000/0	85/87	2200
	URB2409S-10WR3			9	1111/0	85/88	680
	URB2412S-10WR3			12	833/0	86/88	470
	URB2415S-10WR3			15	667/0	86/88	330
	URB2424S-10WR3			24	417/0	85/87	220

Notes:

- ① Exceeding the maximum input voltage may cause permanent damage;
② Efficiency is measured at nominal input voltage and rated output load.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load /no-load)	3.3VDC output	--	389/25	398/45	mA
	5VDC output	--	474/25	485/45	
	Others	--	474/9	485/18	
Reflected Ripple Current		--	50	--	
Surge Voltage (1sec. max.)		-0.7	--	50	VDC
Start-up Voltage		--	--	9	
Input Under-voltage Protection		5.5	6.5	--	
Input Filter		Capacitance Filter			
Hot Plug		Unavailable			
Ctrl*	Module on	Ctrl pin open or pulled high (3.5-12VDC)			
	Module off	Ctrl pin pulled low to GND (0-1.2VDC)			
	Input current when off	--	6	10	mA

Note: * The Ctrl pin voltage is referenced to input GND.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy ^①	5% -100% load	--	±1.5	±2	%

Linear Regulation	Input voltage variation from low to high at full load	--	±0.25	±0.5		
Load Regulation ^②	5% -100% load	--	±0.5	±1		
Transient Recovery Time	25% load step change, nominal input voltage		300	500	μs	
Transient Response Deviation		3.3V/5VDC output	--	±5	±8	%
		Others	--	±3	±5	
Temperature Coefficient	Full load	--	--	±0.03	%/°C	
Ripple & Noise ^③	20MHz bandwidth, 5% -100% load	--	75	150	mV p-p	
Over-current Protection	Input voltage range	110	160	230	%Io	
Short-circuit Protection		Continuous, self-recovery				

Note: ① Under 0%-5% load conditions, the maximum output voltage accuracy is ±3%;
 ② Load regulation for 0%-100% load is ±3%;
 ③ Under 0% -5% load conditions, ripple & noise does not exceed 300mV, please refer to Fig.2 for testing method.

General Specification

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	1000	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Humidity	Non-condensing	5	--	95	%RH
Storage Temperature		-55	--	+125	°C
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	
Vibration		10-150Hz, 0.75mm, 5G, 90Min. along X, Y and Z			
Switching Frequency *	PWM mode	--	500	--	kHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	k hours

Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94-V0)
Dimensions	22.00 x 9.50 x 12.00 mm
Weight	5.5 g (Typ.)
Cooling method	Free air convection (20LFM)

Electromagnetic compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig.4-② for recommended circuit)
	RE	CISPR32/EN55032	CLASS B (see Fig.4-② for recommended circuit)
Immunity	ESD	IEC/EN61000-4-2	Contact ±6kV perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN61000-4-4	±2kV (see Fig.4-① for recommended circuit) perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2kV (see Fig.4-① for recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s perf. Criteria A

Typical Characteristic Curves





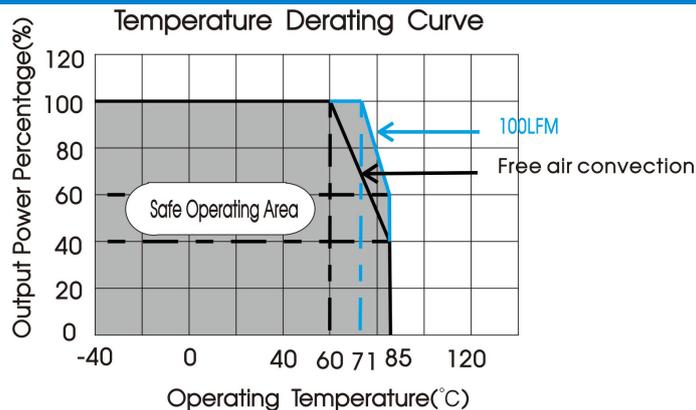


Fig. 1

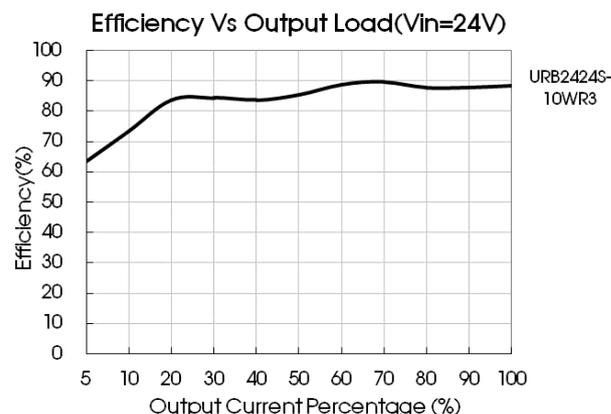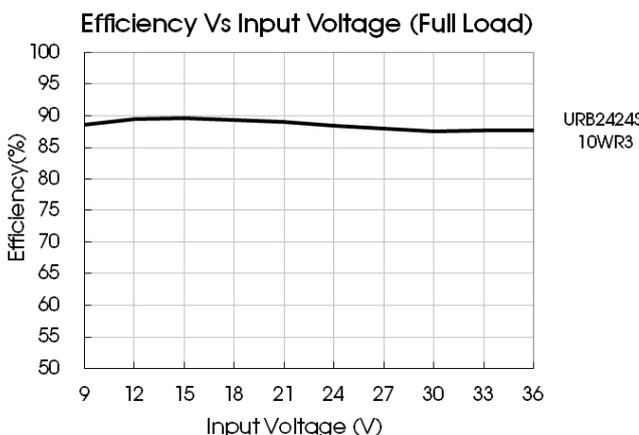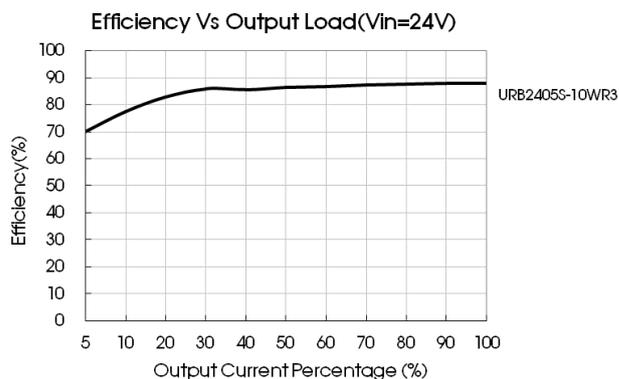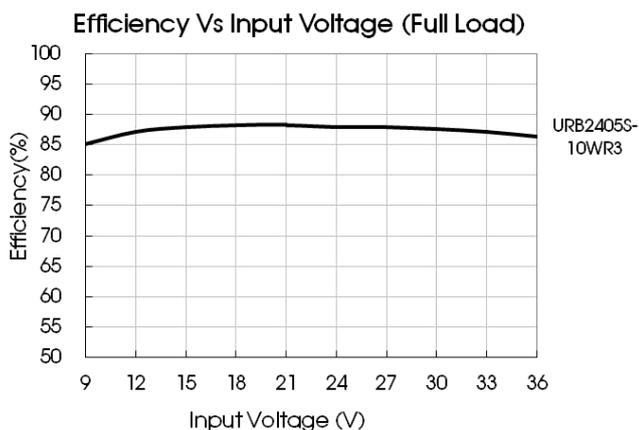

Design Reference

1. Ripple & Noise

All the DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2. Please keep the wire of probe to copper as short as possible.

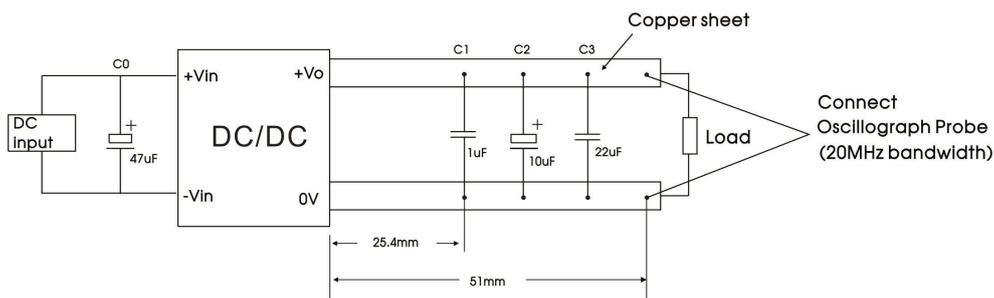


Fig. 2

2. Typical application

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the max. capacitive load value of the product.



Fig. 3

C_{in}	$V_{out}(VDC)$	C_{out}
47 μ F/100V	3.3/5/9	22 μ F/16V
	12/15	22 μ F/25V
	24	22 μ F/50V

3. EMC compliance circuit

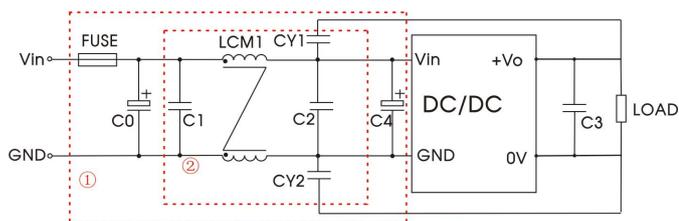


Fig. 4

Notes: For EMC tests we use Part ① In Fig. 4 for immunity and part ② for emissions test. Selecting based on needs.

Parameter description:


Model	V_{in} : 24VDC
FUSE	Choose according to actual input current
C0/C4	330 μ F/50V
C1/C2	10 μ F/50V
C3	Refer to the C_{out} in Fig2
LCM1	470 μ H, recommended to use MORNSUN's FL2D-13-471R3
CY1/CY2	1nF/2000VDC

4. The products do not support parallel connection of their output

5. For additional information please refer to DC-DC converter application notes on


www.mornsun-power.com

Dimensions and Recommended Layout

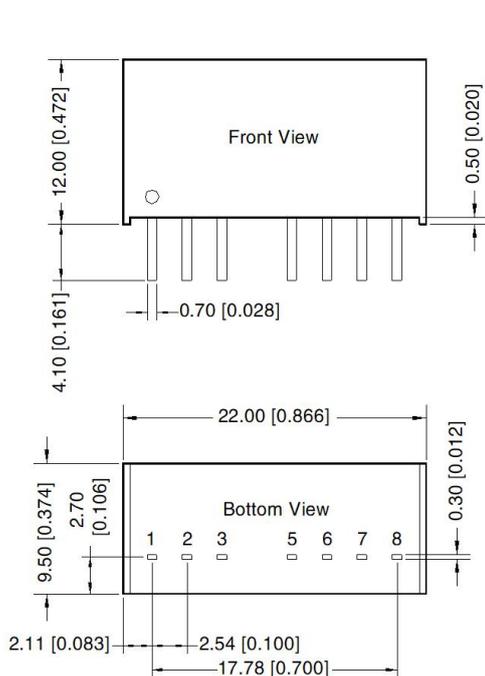

Note:
Unit: mm[inch]
Pin section tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

THIRD ANGLE PROJECTION

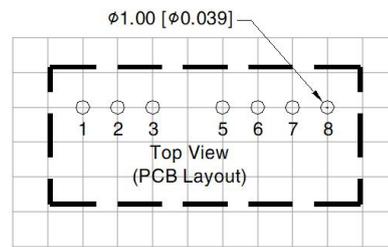

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	GND
2	Vin
3	Ctrl
5	NC
6	+Vo
7	0V
8	NC

NC: Pin to be isolated from circuitry

- Note:
- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58210004;
 - The maximum capacitive load offered were tested at input voltage range and full load;
 - Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
 - All index testing methods in this datasheet are based on company corporate standards;
 - We can provide product customization service, please contact our technicians directly for specific information;
 - Products are related to laws and regulations: see "Features" and "EMC";
 - Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com