

MATERIALS AND FINISHES

BODY BRASS
PLATED NICKEL

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INTERMEDIATE CONTACT BRASS
PLATED GOLD

INSULATOR TEFLON


TEST REQUIREMENTS:

1. CONTACT RETENTION: 26.69 N(6 LBS) AXIAL FORCE

2. INSULATION RESISTANCE:

- GREATER THAN 4x10E15 OHMS FROM
CENTER CONTACT TO INTERMEDIATE
CONTACT
- GREATER THAN 1x10E15 OHMS FROM
CENTER CONTACT AND INTERMEDIATE
CONTACT TO BODY

TRIAx JACK
INTERFACE

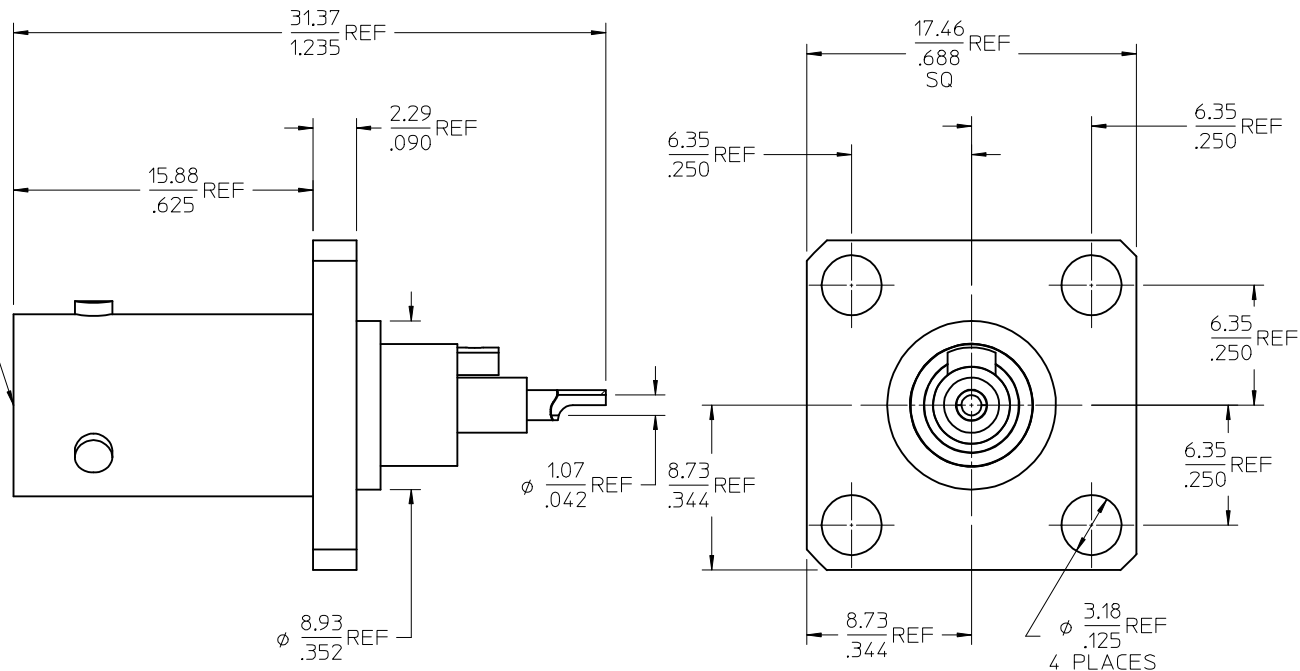

PART # 73415-1740

MIL-STD-348A, FIG. 201.2

INTERFACE

SPECIFICATION

DESCRIPTION

CHG: NEW RELEASE
REDREW IN SD
CHANGED ALL DIMS
FROM IN/MM TO MM/IN
ADDED ISO VIEW
EC NO: URF2006-0344
DRWN: TELATERY 2006/02/03
CHKD: SSHAH 2006/02/03
APPR: JWIENER 2006/02/03
REV: A

QUALITY
SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .---	± .---
3 PLACES	± .---	± .---
2 PLACES	± .---	± .---
1 PLACE	± .---	± .---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN
DRAWN BY DATE
TEF 2001/10/29
CHECKED BY DATE
SSS 2001/10/29
APPROVED BY DATE
GMH 2001/10/29

MATERIAL NO.
734151740

SIZE
C

SCALE
DESIGN UNITS
METRIC
THIRD ANGLE
PROJECTION

TITLE
TRIAx,3 LUG, 4H FLG
WITH SOLDER POT
TRIAx-JC/F

MOLEX INCORPORATED

DOCUMENT NO.
SD-73415-174

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION