


MATERIALS AND FINISHES:

BODY: STAINLESS STEEL
PASSIVATE


CENTER CONTACT: BERYLLIUM COPPER
PLATED: GOLD (30μ-in) MIN
OVER NICKEL (100μ-in) MIN.

INSULATOR: PTFE


SCREW: STEEL
PASSIVATE




FOR -0001
0-80 UNF-2A THREAD
TORQUE TO .5-.8 INCH-POUNDS





FOR -0002

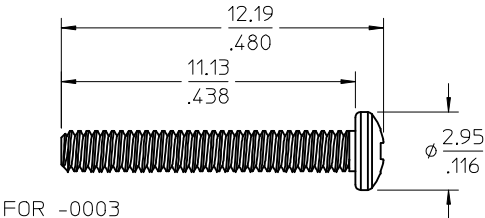

FOR -0003

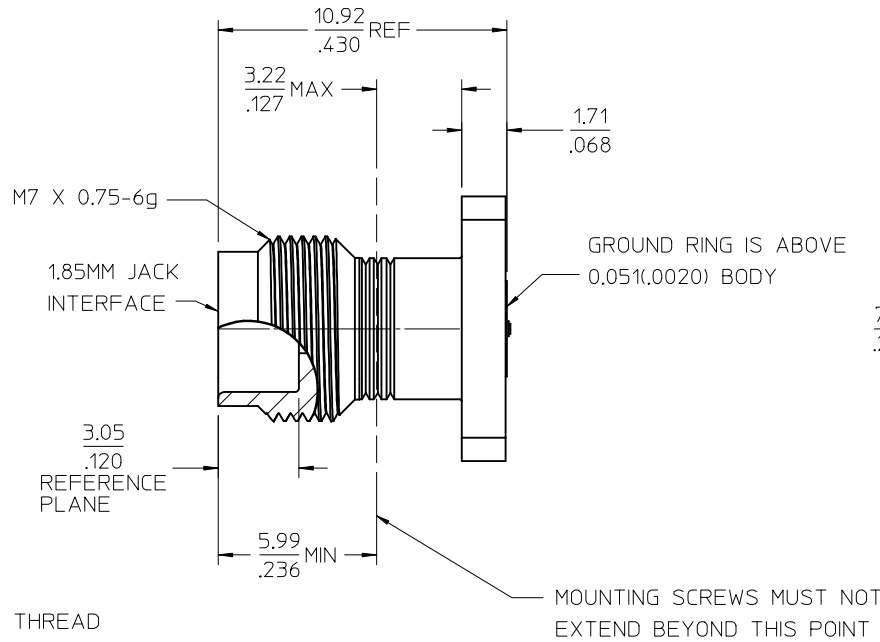

GENERAL PCB LAYOUT RECOMMENDATIONS
FOR OPTIMIZED LAYOUTS, CONTACT
MOLEX ENGINEERING

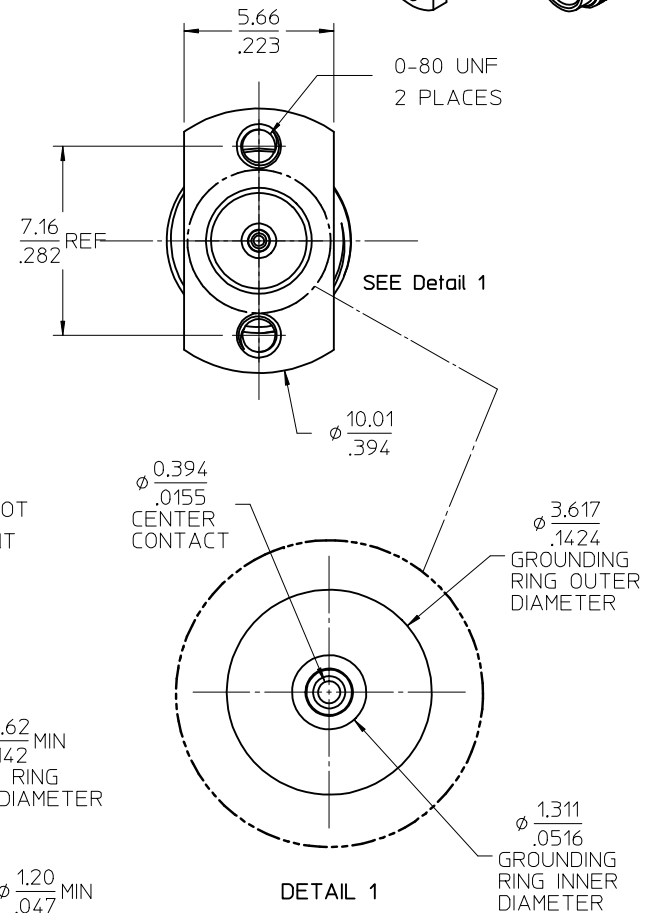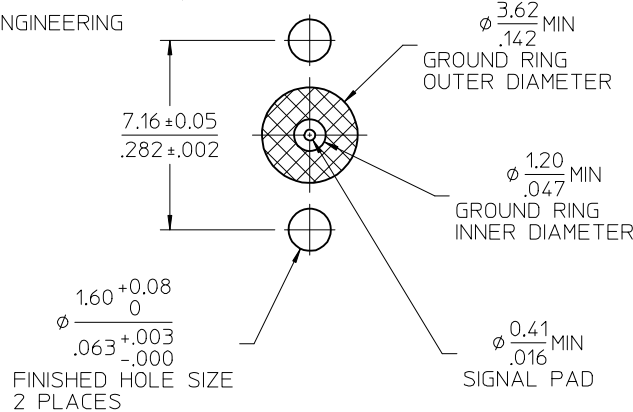

73157-0003	WITH TWO 11.1/.438 SCREWS	6.4(.252) TO 8.94(.352)
73157-0002	WITH TWO 6.35/.25 SCREWS	1.96(.077) TO 3.99(.157)
73157-0001	WITH TWO 4.76/.19 SCREWS	0.56(.022) TO 2.54(.100)
73157-0000	NO HARDWARE	N/A
PART NO.	DESCRIPTION	PCB THICKNESS

CHG: DRW VIEW UPDATED, ADDED DIA FOR C/SINK HOLES ON BODY & GEN TOLERANCE VALUES. EC NO: URF-2016-0157 2015/09/01 DRWN:APRAKASH01 2015/09/01 CHKD:LLM 2015/09/01 APPR:AROBERTSON 2015/09/15	DESCRIPTION
--	-------------

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± --- ± ---
3 PLACES ± --- ± 0.010
2 PLACES ± 0.25 ± ---
1 PLACE ± --- ± ---
ANGULAR ± 2 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE MM/IN
DRAWN BY JLEE02
CHECKED BY SSS
APPROVED BY JWIENER
MATERIAL NO. SEE TABLE
SIZE C

SCALE METRIC
DESIGN UNITS METRIC
THIRD ANGLE PROJECTION
TITLE 1.85MM JACK PCB FIELD REPLACEABLE 50 OHM EWR-5044, 1.85MM-JR/PCB
MOLEX INCORPORATED
DOCUMENT NO. SD-73157-000
SHEET NO. 1 OF 1