

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1718141010](#)  
**Status:** **Active**  
**Overview:** [KK® Interconnect System - Molex](#)  
**Description:** 3.96mm Pitch, KK 396 RPC Wire-to-Board Right-Angle Header with Friction Lock, 15µm Gold (Au) Plating, Bag, 10 Circuits

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model</a>                                       | <a href="#">Packaging Specification PK-41792-002-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                                  | <a href="#">Test Summary TS-171813-0001-001 (PDF)</a>          |
| <a href="#">3D Model (PDF)</a>                                 | <a href="#">Symbol Footprint Data SYM-171814-0010 (PDF)</a>    |
| <a href="#">Product Specification PS-171813-0001-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>           |
| <a href="#">Product Specification PS-171813-0002-001 (PDF)</a> |  |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**


|                |   |
|----------------|---|
| Product Family | PCB Headers                                     |
| Series         | <a href="#">171814</a>                          |
| Application    | Power, Signal, Wire-to-Board                    |
| Overview       | <a href="#">KK® Interconnect System - Molex</a> |
| Product Name   | KK 396  |
| UPC            | 887191429526                                    |

**Physical**

|                                |                |
|--------------------------------|----------------|
| Breakaway                      | No             |
| Circuits (Loaded)              | 10             |
| Circuits (maximum)             | 10             |
| Color - Resin                  | Black          |
| Durability (mating cycles max) | 25             |
| First Mate / Last Break        | No             |
| Flammability                   | 94V-1          |
| Glow-Wire Capable              | No             |
| Guide to Mating Part           | No             |
| Keying to Mating Part          | None           |
| Lock to Mating Part            | Yes            |
| Material - Plating Mating      | Gold           |
| Material - Plating Termination | Nickel         |
| Material - Resin               | Nylon          |
| Net Weight                     | 4.230/g        |
| Number of Rows                 | 1              |
| Orientation                    | Right Angle    |
| PCB Locator                    | No             |
| PCB Retention                  | None           |
| PCB Thickness - Recommended    | 1.60mm         |
| Packaging Type                 | Bag            |
| Pitch - Mating Interface       | 3.96mm         |
| Shrouded                       | Partial        |
| Stackable                      | No             |
| Surface Mount Compatible (SMC) | Yes            |
| Temperature Range - Operating  | -40° to +105°C |
| Termination Interface: Style   | Through Hole   |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 7.0A |
| Voltage - Maximum             | 250V |

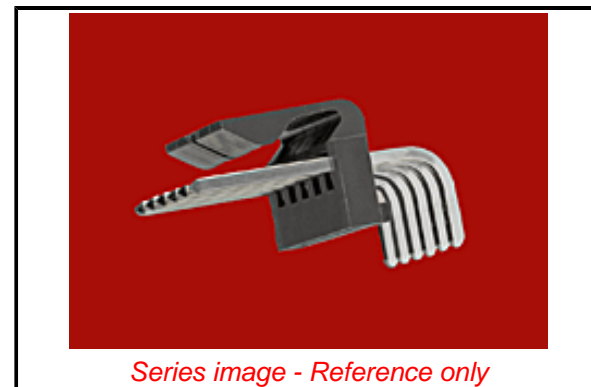

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)4578-DC (25  
June 2020)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[171814 Series](#)

**Solder Process Data**

|  |          |
|--|----------|
| Duration at Max. Process Temperature (seconds) | 030      |
| Lead-free Process Capability                   | SMC&WAVE |
| Max. Cycles at Max. Process Temperature        | 003      |
| Process Temperature max. C                     | 260      |

**Material Info****Reference - Drawing Numbers**

|                         |  |
|-------------------------|--|
| Packaging Specification | PK-41792-002-001                       |
| Product Specification   | PS-171813-0001-001, PS-171813-0002-001 |
| Sales Drawing           | SD-171814-0001-000, SD-171814-0001-002 |
| Symbol/Footprint Data   | SYM-171814-0010                        |
| Test Summary            | TS-171813-0001-001                     |

This document was generated on 07/27/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**