

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [5052781733](#)  
**Status:** **Active**  
**Overview:** [Easy-On FFC FPC Connectors](#)  
**Description:** 0.50mm Pitch Easy-On FFC/FPC Connector, 1.90mm Height, Single Bottom Contact (FS19), Right-Angle, Surface Mount, ZIF, 17 Circuits

**Documents:**

|                                |  |
|--------------------------------|--|
| <a href="#">3D Model (PDF)</a> | <a href="#">Product Specification 5052780000-000 (PDF)</a>   |
| <a href="#">3D Model</a>       | <a href="#">Packaging Specification 5052789200-200 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>  | <a href="#">RoHS Certificate of Compliance (PDF)</a>         |

**General**

|                |  |
|----------------|--|
| Product Family | FFC/FPC Connectors                         |
| Series         | <a href="#">505278</a>                     |
| Comments       | Black Actuator                             |
| Overview       | <a href="#">Easy-On FFC FPC Connectors</a> |
| Product Name   | Easy-On                                    |
| UPC            | 889056034227                               |

**Physical**

|                                |                        |
|--------------------------------|------------------------|
| Actuator Type                  | Flip                   |
| Circuits (Loaded)              | 17                     |
| Color - Resin                  | Beige                  |
| Contact Position               | Bottom                 |
| Durability (mating cycles max) | 20                     |
| Mated Height                   | 1.90mm                 |
| Material - Metal               | Phosphor Bronze        |
| Material - Plating Mating      | Tin-Bismuth            |
| Material - Plating Termination | Tin-Bismuth            |
| Material - Resin               | Liquid Crystal Polymer |
| Net Weight                     | 153.310/mg             |
| Number of Rows                 | 1                      |
| Orientation                    | Right Angle            |
| PCB Locator                    | No                     |
| PCB Mounting                   | Surface Mount          |
| PCB Retention                  | Yes                    |
| Packaging Type                 | Embossed Tape on Reel  |
| Pitch - Mating Interface       | 0.50mm                 |
| Pitch - Termination Interface  | 0.50mm                 |
| Plating min - Mating           | 1.016µm                |
| Plating min - Termination      | 1.016µm                |
| Polarized to PCB               | Yes                    |
| Stackable                      | No                     |
| Temperature Range - Operating  | -40° to +85°C          |
| Wire/Cable Type                | FFC/FPC                |


**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 0.5A |
| Voltage - Maximum             | 50V  |

**Material Info**

**Reference - Drawing Numbers**

|                         |                                |
|-------------------------|--------------------------------|
| Packaging Specification | 5052789200-200                 |
| Product Specification   | 5052780000-000                 |
| Sales Drawing           | 5052780000-000, 5052781000-000 |

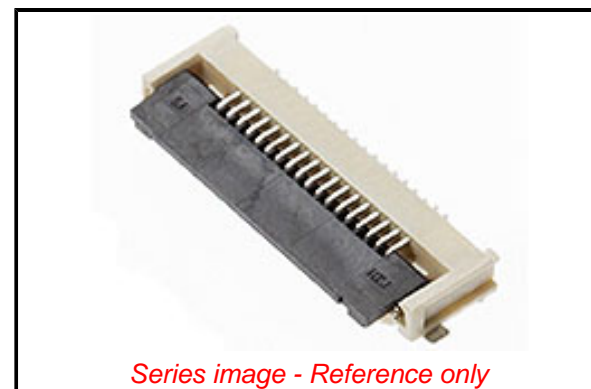

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)4578-DC (25  
June 2020)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[505278 Series](#)

This document was generated on 07/29/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**