

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0022552261

Status:


Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Crimp Housing, Dual Row, Version A, Non-polarized, 26 Circuits, Black

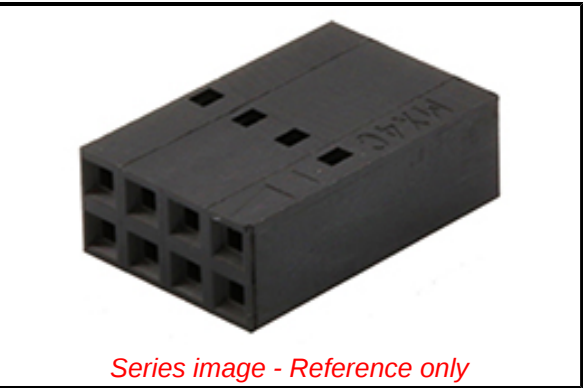

Documents:

[3D Model](#)

[3D Model \(PDF\)](#)

[Drawing \(PDF\)](#)

[Product Specification PS-70058-001 \(PDF\)](#)

[Product Specification PS-70400-001 \(PDF\)](#)

[Test Summary TS-70058-001-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

|                               |                            |
|-------------------------------|----------------------------|
| Agency Certification          |                            |
| CSA                           | LR19980                    |
| UL                            | E29179                     |
| General                       |                            |
| Product Family                | Crimp Housings             |
| Series                        | 70450                      |
| Application                   | Signal, Wire-to-Board      |
| Comments                      | Version A                  |
| Overview                      | SL Modular Connectors      |
| Product Name                  | SL                         |
| UPC                           | 800753626522               |
| Physical                      |                            |
| Breakaway                     | No                         |
| Circuits (maximum)            | 26                         |
| Color - Resin                 | Black                      |
| Flammability                  | 94V-0                      |
| Gender                        | Receptacle                 |
| Glow-Wire Capable             | No                         |
| Material - Resin              | Polyester                  |
| Net Weight                    | 2.210/g                    |
| Number of Rows                | 2                          |
| Packaging Type                | Bag                        |
| Panel Mount                   | No                         |
| Pitch - Mating Interface      | 2.54mm                     |
| Stackable                     | Yes                        |
| Temperature Range - Operating | -40° to +105°C             |
| Solder Process Data           |                            |
| Lead-freeProcess Capability   | N/A                        |
| Material Info                 |                            |
| Engineering Number            | 70450-0012                 |
| Reference - Drawing Numbers   |                            |
| Product Specification         | PS-70058-001, PS-70400-001 |
| Sales Drawing                 | SD-70450-0001-0026-0       |
| Test Summary                  | TS-70058-001-001           |

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

D(2020)4578-DC (25

June 2020)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

70450 Series

Mates With

2.54mm Pitch C-Grid Header 70229 , 70280 , 70246 , 70247

Use With

70058 , 71851

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION