

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0467652301

Status:

Active

Overview:


High Definition Multimedia Interface (HDMI*) Micro Connectors

Description:

0.40mm Pitch Micro HDMI Connector, Right-Angle Receptacle, Surface Mount, Hybrid Type Mount, with Pick-and-Place Polyimide Tape, 19 Circuits, Lead-Free

Documents:	
3D Model	Drawing (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	I/O Connectors
Series	46765
Application	Wire-to-Board
Comments	Hybrid Mount comprise Vertical and Horizontal Type shell tabs
Component Type	Receptacle
Overview	High Definition Multimedia Interface (HDMI*) Micro Connectors
Product Name	Micro HDMI
Type	D
UPC	884982716148
Physical	
Boot Color	N/A
Circuits (Loaded)	19
Circuits (maximum)	19
Flammability	94V-0
Gender	Female
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
Net Weight	0.312/g
Number of Rows	2
Orientation	Right Angle
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Pitch - Mating Interface	0.40mm
Pitch - Termination Interface	0.40mm
Plating min - Mating	0.381µm
Plating min - Termination	0.051µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Electrical	
Current - Maximum per Contact	0.8A

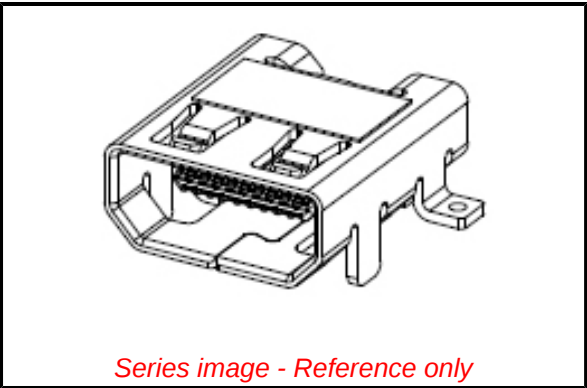

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

Green Image

REACH SVHC

Not Contained Per - D(2020)4578-DC (25 June 2020)

Halogen-Free Status

Low-Halogen

For more information, please visit

Contact US

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

46765 Series

Mates With

68786 Micro HDMI Cable Assemblies

Grounding to Panel	Yes
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	30V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	002
Process Temperature max. C	260
Material Info	

This document was generated on 07/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION