

9

8

7

6

5

4

3



2

1


E


注記 NOTES

1. 製品詳細寸法については図面5047541000を参照下さい。
REFER TO THE 5047541000 ABOUT DIMENSIONS IN DETAIL.
2. 梱包数量：5000個/リール
NUMBER OF CONNECTORS：5000 PCS/REEL
3. リードテープ長さ
LEAD TAPE LENGTH

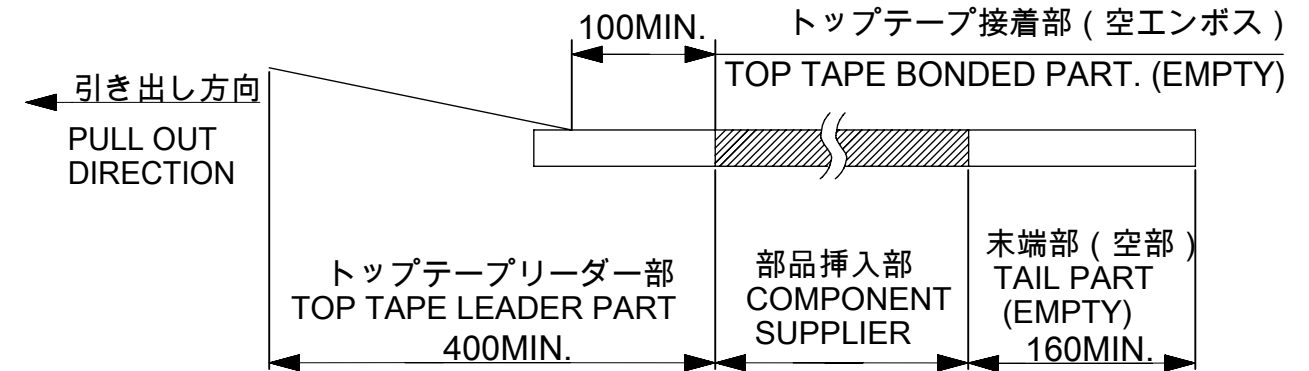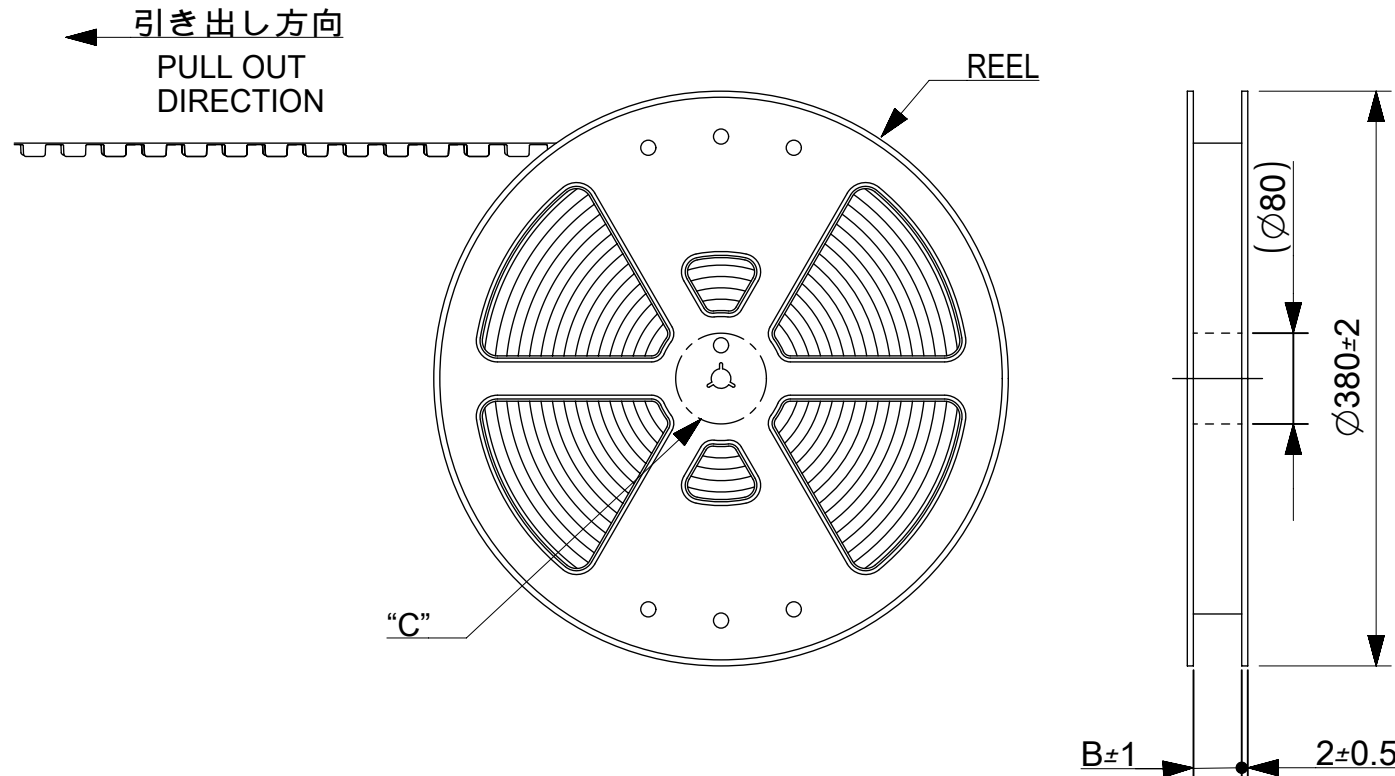

4. 材料 MATERIAL
キャリアテープ(CARRIER TAPE)：ポリスチレン(POLYSTYRENE)
トップテープ(TOP TAPE)：PET, PE, PEF
リール(REEL)：ポリスチレン(PS)リサイクル材含む
POLYSTYRENE(PS)RECYCLE MATERIAL CONTAINED
5. ELV及びRoHS適合品
ELV AND RoHS COMPLIANCT

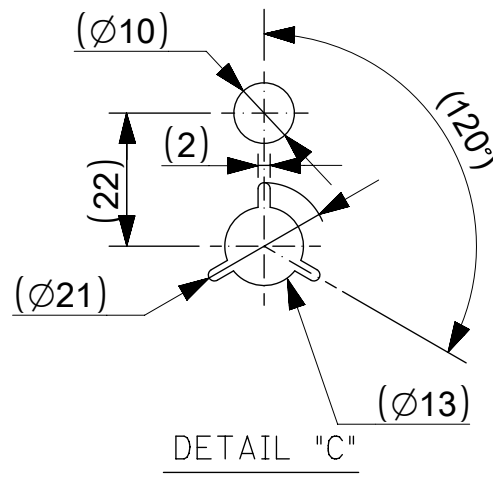

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
REVISED	EC NO: 106328 DRWN: YCHEN128 CHK'D: YKOBAYASHI02 APPR: TKUSUHARA01	2016/07/05 2016/07/07 2016/07/07	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®					
					MM		10:1							
			ANGULAR TOL ± 1.0 °		DRWN BY		DATE		0.3 FPC CONN. B/F LA75 SERIES TAPING PKG					
					AYOSHIII01		2016/03/18							
			4 PLACES ± 0.03		CHK'D BY		DATE		PRODUCT CUSTOMER DRAWING					
			3 PLACES ± 0.03		YKOBAYASHI02		2016/03/31							
			2 PLACES ± 0.05		APPR BY		DATE		SERIES MATERIAL NUMBER CUSTOMER					
			1 PLACE ± 0.1		TKUSUHARA01		2016/03/31							
			0 PLACES ± 0.2		DRAWING SIZE		THIRD ANGLE PROJECTION		504754		SEE CHART			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3				DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER	
5047540000		PSD							000	1 OF 2				

A

B

D

E

9

8

7

6

5


4


3

2

1

FORMAT: lb-prod-A3
REVISION: F
DATE: 2015/11/18

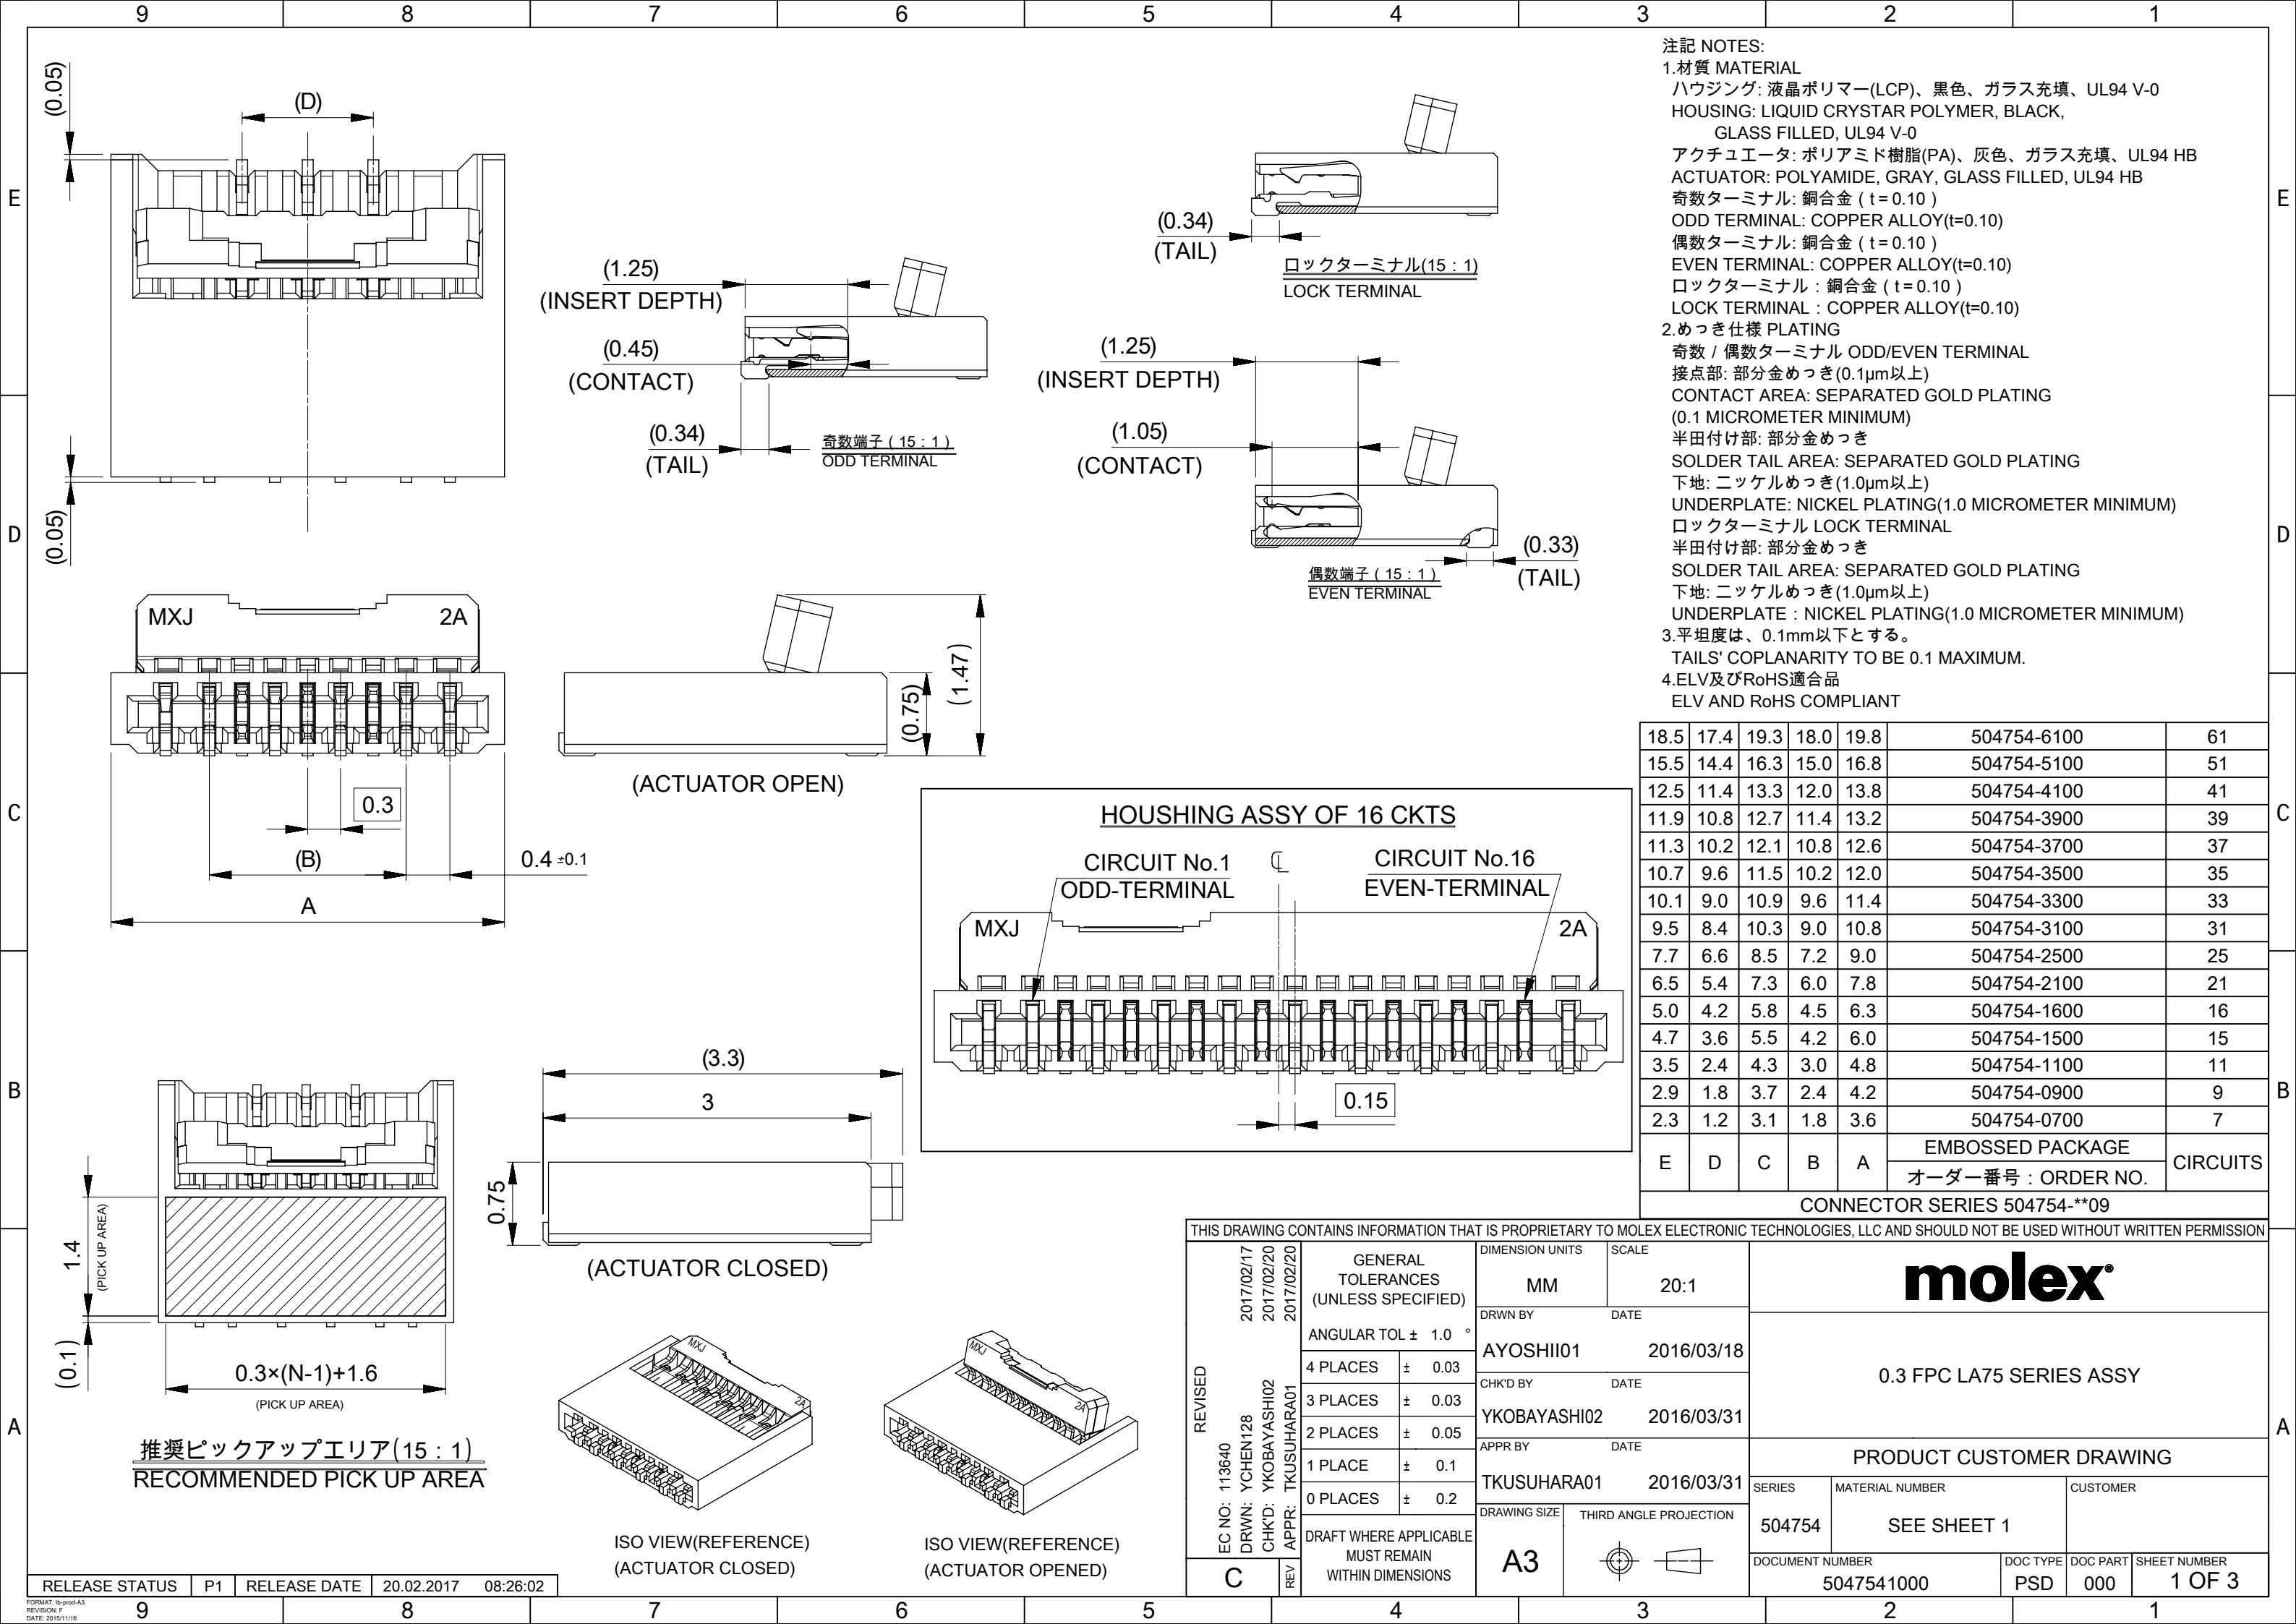

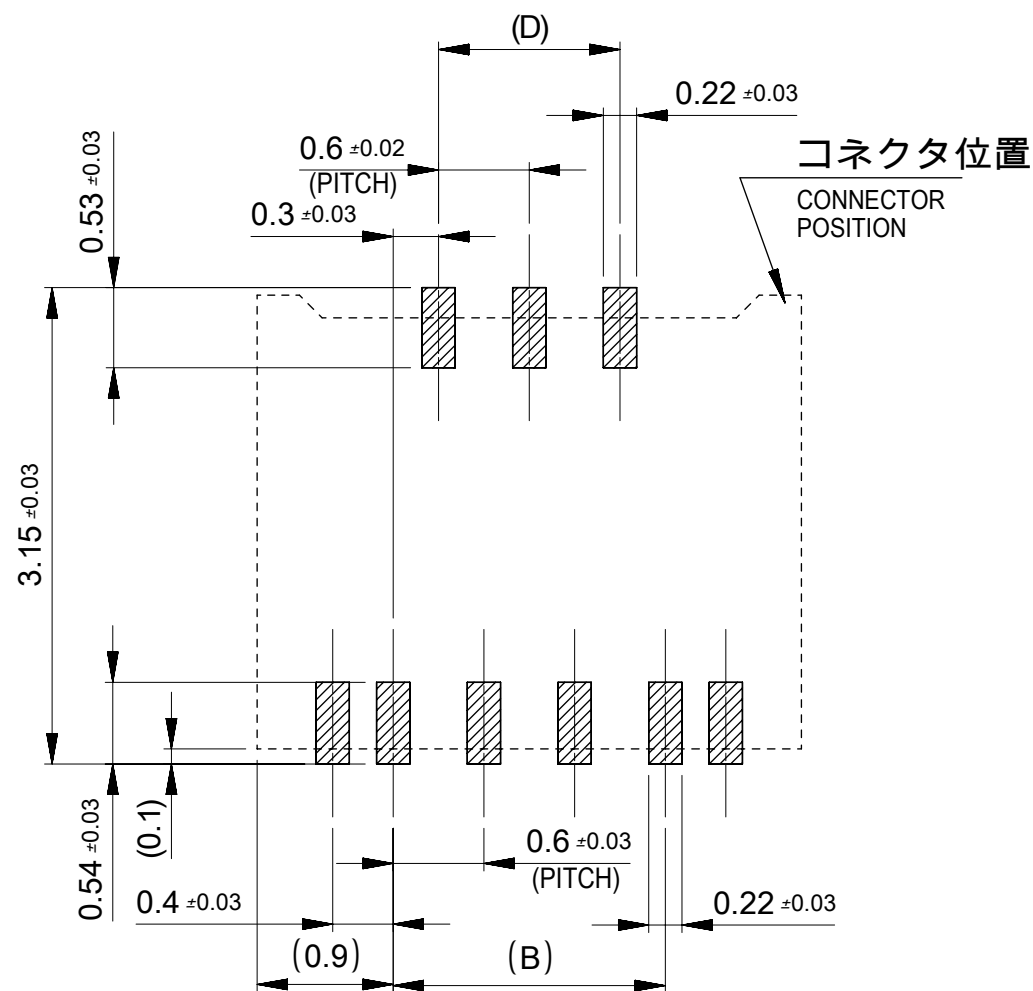

推奨基板レイアウト

RECOMMENDED P.C.BOARD PATTERN LAYOUT

推奨メタルマスク厚さ：0.1mm

RECOMMENDED METAL MASK THICKNESS : 0.1mm

推獎開口率 : 80%

APERTURE RATE : 80%

注記
NOTE

1. 必ず基板に実装してからアクチュエ-タを操作して下さい。
PLEASE OPERATE THE ACTUATOR AFTER MOUNTING ON
THE SUBSTRATE.

2. FPCについて

ABOUT FPC

補強フィルム材質はポリイミドを推奨します。ベースフィルムは25μmを推奨します。

接着剤は熱硬化接着剤を推奨します。

尚、接着剤の接点部への付着は導通不良の原因になりますので、染み出しが無い様、お願い致します。

RECOMMENDED STIFFENER MATERIAL: POLYIMIDE

RECOMMENDED BASE FILM THICKNESS: 25 MICROMETER

RECOMMENDED ADHESIVE: THERMOSETTING ADHESIVE


NOTE: PLEASE PUT APPROPRIATE AMOUNT OF ADHESIVE

ON ADHEREND BECAUSE THERE IS A POSSIBILITY THAT THE EXTRA ADHESIVE CAUSES THE DEFECT IN ELECTRICAL CONTINUITY.


打抜き方向は導体側から補強板側を推奨致します。

RECOMMENDED PUNCHER DIRECTION:

FROM CONDUCTOR SIDE TO STIFFENER FILM SIDE.

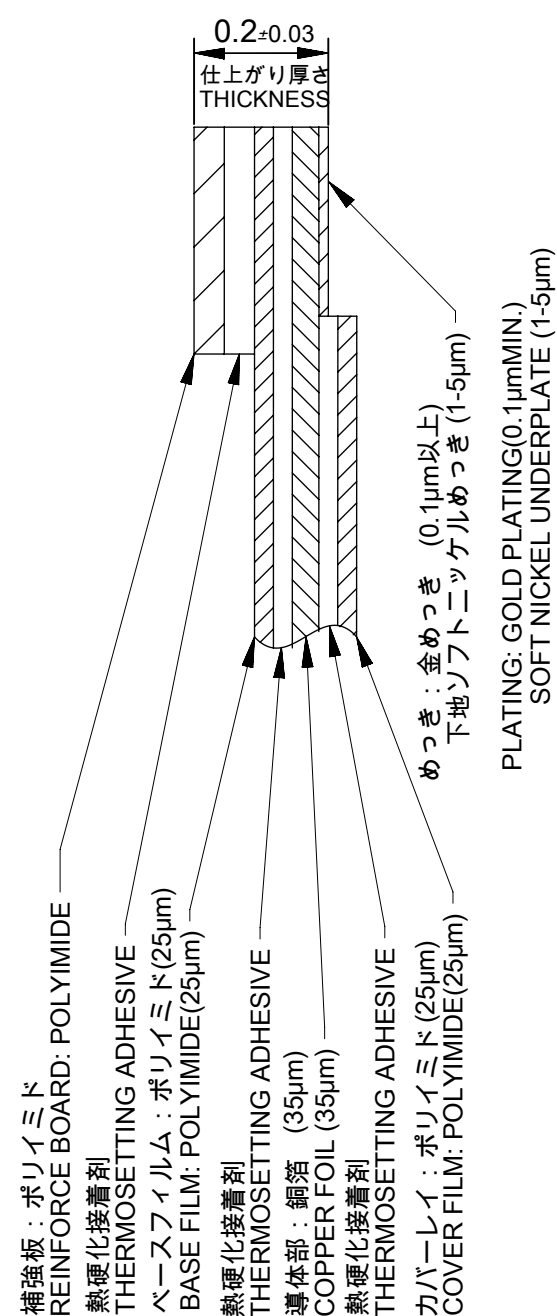


FPC構成推奨仕様
STRUCTURE OF FPC

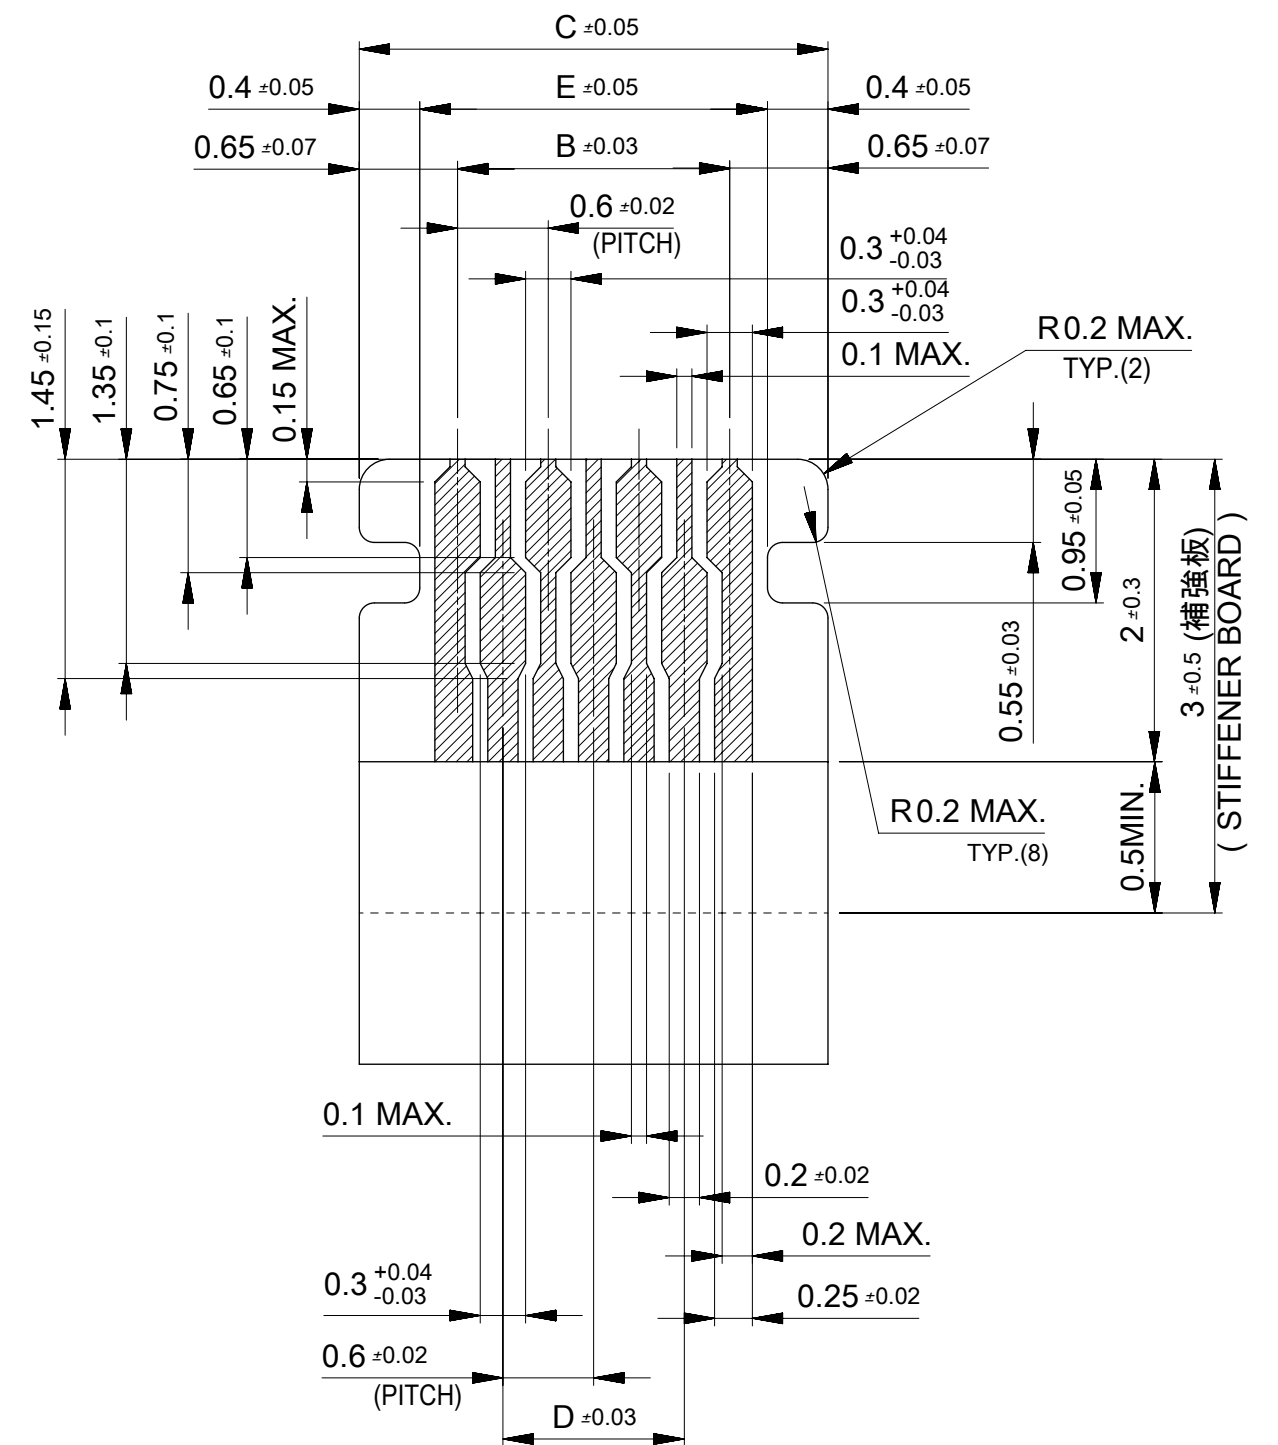


適合金メッキFPC推奨寸法
仕上がり厚さ：0.2±0.03

APPLICABLE FPC WITH GOLD PLATING
RECOMMENDED DIMENSION
THICKNESS : 0.2 ± 0.03

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
REVISED	EC NO: 113640 DRWN: YCHEN128 CHK'D: YKOBAYASHI02 APPR: TKUSUHARA01	2017/02/17	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®						
		2017/02/20			MM		20:1								
		2017/02/20	ANGULAR TOL ± 1.0 °		DRWN BY		DATE		0.3 FPC LA75 SERIES ASSY						
			4 PLACES	± 0.03	AYOSHIII01		2016/03/18								
			3 PLACES	± 0.03	CHK'D BY		DATE		PRODUCT CUSTOMER DRAWING						
			2 PLACES	± 0.05	YKOBAYASHI02		2016/03/31								
			1 PLACE	± 0.1	APPR BY		DATE		SERIES 504754						
			0 PLACES	± 0.2	TKUSUHARA01		2016/03/31							MATERIAL NUMBER SEE SHEET 1	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DRAWING SIZE		THIRD ANGLE PROJECTION		CUSTOMER					
						A3									DOCUMENT NUMBER 5047541000
								DOC TYPE PSD		DOC PART 000		SHEET NUMBER 2 OF 3			

奇数極ASSY用
FOR ODD CKT ASSY

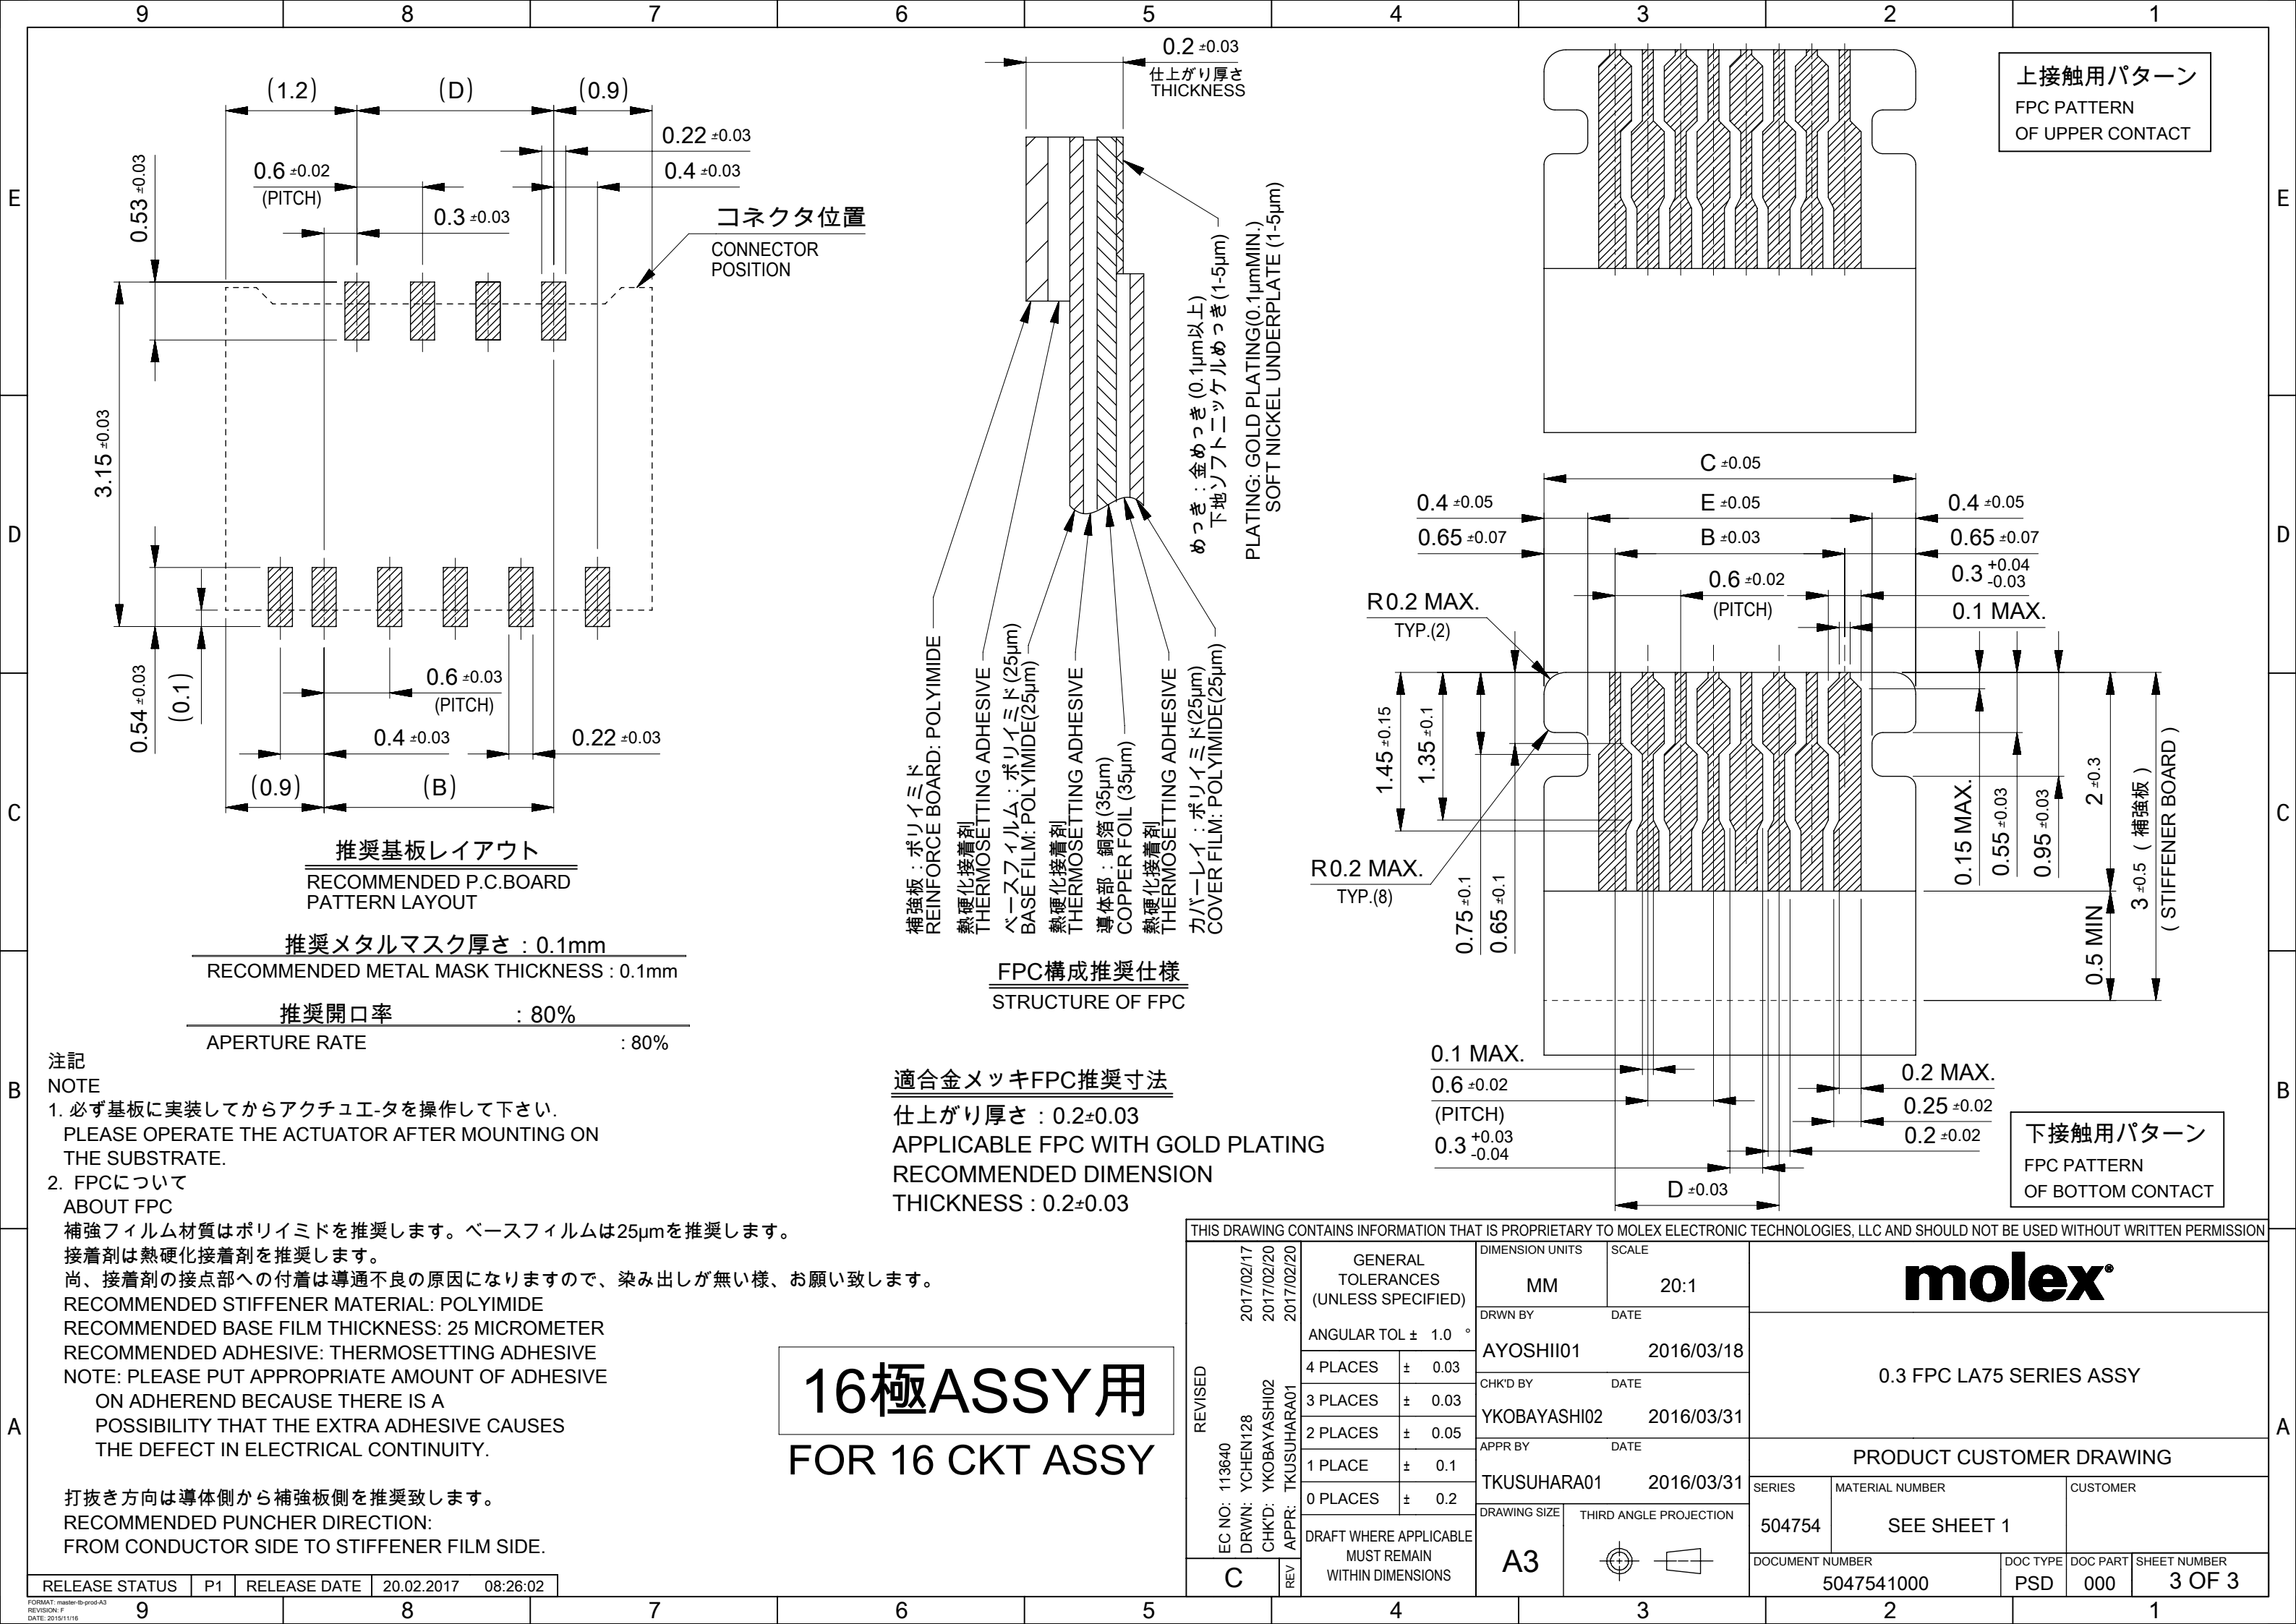

16極ASSY用
FOR 16 CKT ASSY