



MATERIALS AND FINISHES:

BODY, CONTACT: BERYLLIUM COPPER
PLATING: SEE TABLE


INSULATOR: PTFE




73406-6400 THRU -6409

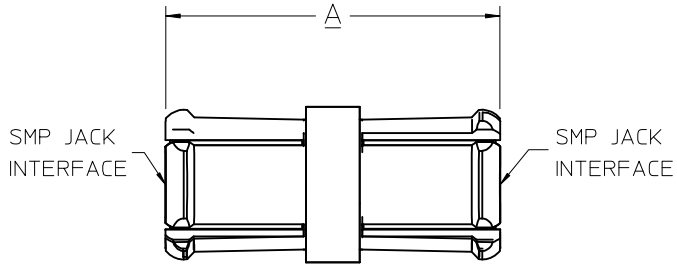

73406-6410 & -6411

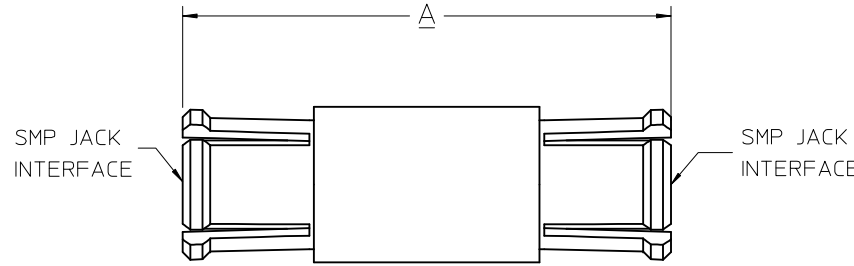

73406-6400 THRU -6409



73406-6410 & -6411

73406-6411	.414±.002	10.52±0.05	GOLD (30μ-in MIN) OVER NICKEL (100μ-in MIN)	TRAY (80 CAV.)	73406-6411
73406-6410	.291±.002	7.39±0.05			73406-6410
73406-6409	.497±.002	12.63±0.05			73406-6409
73406-6408	1.033±.002	26.25±0.05		TRAY (54 CAV.)	73406-6408
73406-6407	1.001±.002	25.43±0.05			73406-6407
73406-6406	.806±.002	20.47±0.05			73406-6406
73406-6405	.474±.002	12.04±0.05		TRAY (80 CAV.)	73406-6405
73406-6404	.882±.002	22.40±0.05	GOLD (10μ-in MIN) OVER NICKEL (100μ-in MIN)	TRAY (54 CAV.)	73406-6404
73406-6403	.449±.002	11.40±0.05		TRAY (80 CAV.)	73406-6403
73406-6402	.606±.002	15.40±0.05	73406-6402		
73406-6401	.488±.002	12.40±0.05	GOLD (30μ-in MIN) OVER NICKEL (100μ-in MIN)		73406-6401
73406-6400	.424±.005	10.77±0.05	73406-6400		
PART NO.	IN	MM	PLATING	PACKAGING	PART NO.
	DIM A		BODY & CONTACT		

PS-89675-3320		PRODUCT SPECIFICATION	
MIL-STD-348B, FIG. 326.1		INTERFACE	
SPECIFICATION		DESCRIPTION	

CHG:ADDED -6411 PER RF16-057 EC NO: URF2016-0699 DRWN:RYEH CHKD: APPR:YCHENG 2016/04/06 2016/04/25	DESCRIPTION	▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 12:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
			4 PLACES 3 PLACES 2 PLACES 1 PLACE 0 PLACE	mm	INCH	DRAWN BY JYL	DATE 2008/06/20	TITLE SMP JACK TO JACK ADAPTER 50 OHMS SMP-J/J/ADP		
				ANGULAR ± 2 °	CHECKED BY SSS		DATE 2008/06/20			
					APPROVED BY JDW		DATE 2008/06/20			
					MATERIAL NO.		DOCUMENT NO.			SHEET NO. 1 OF 1
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C			SEE TABLE
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							