




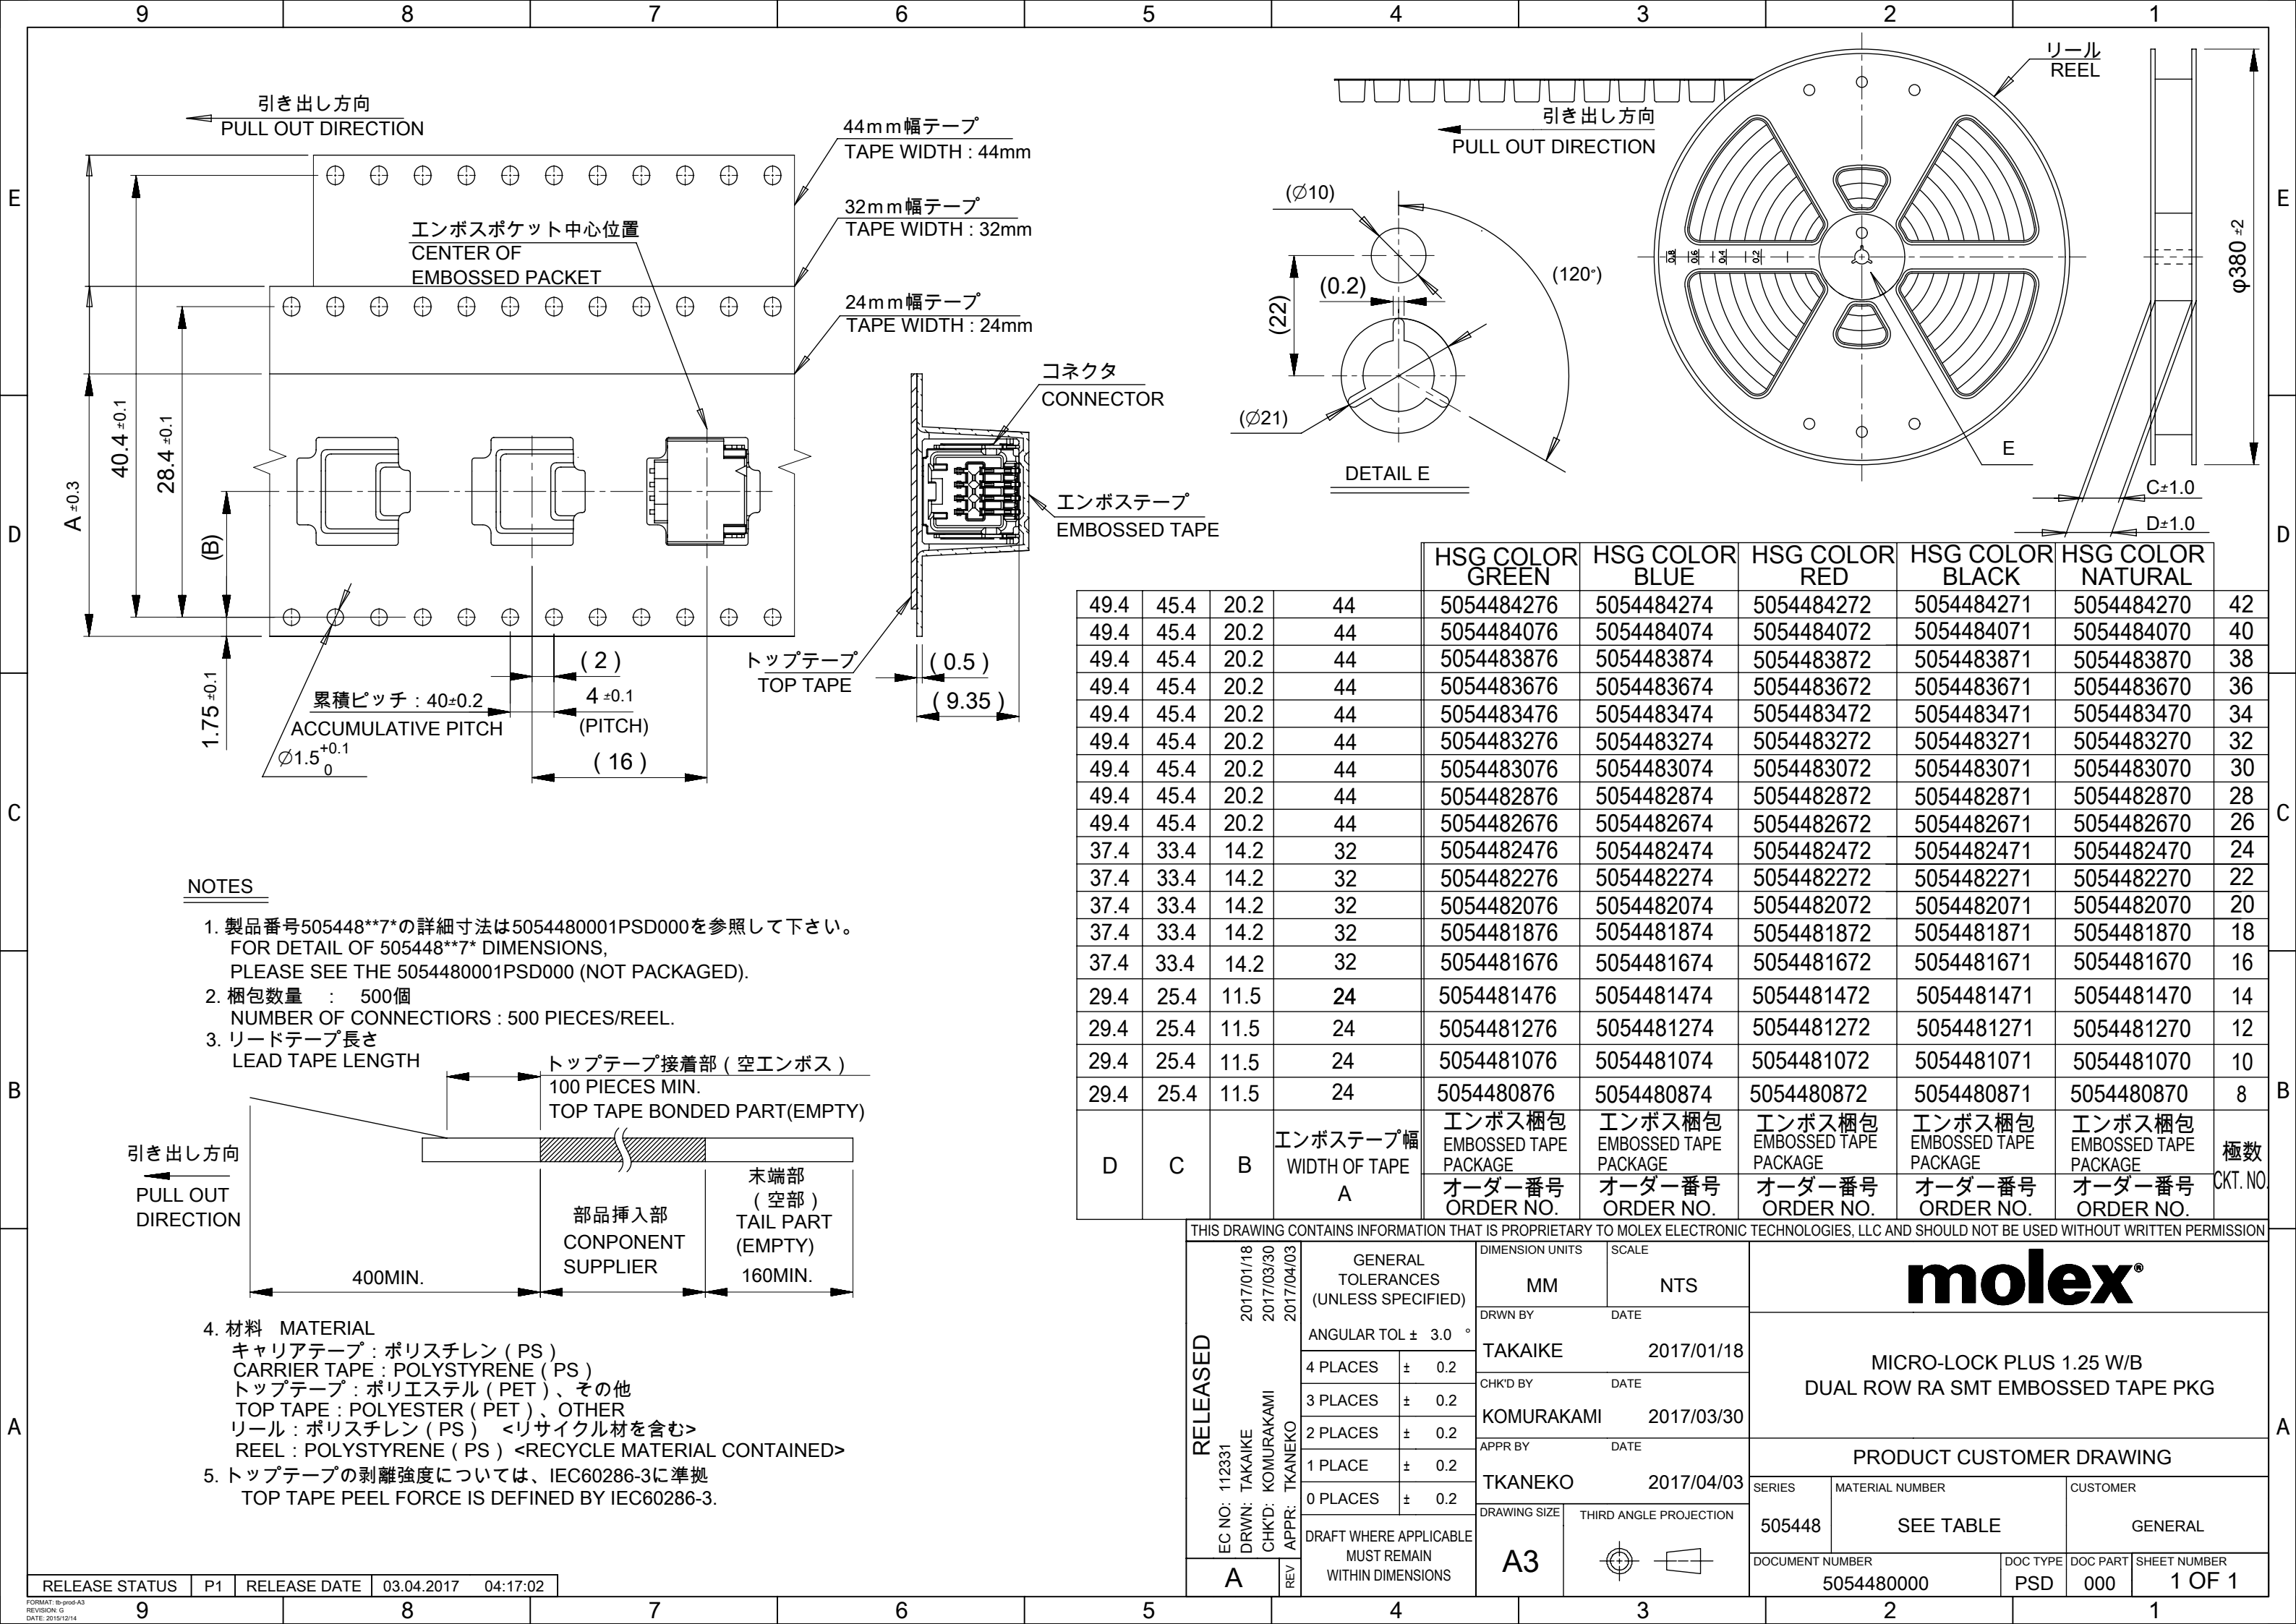


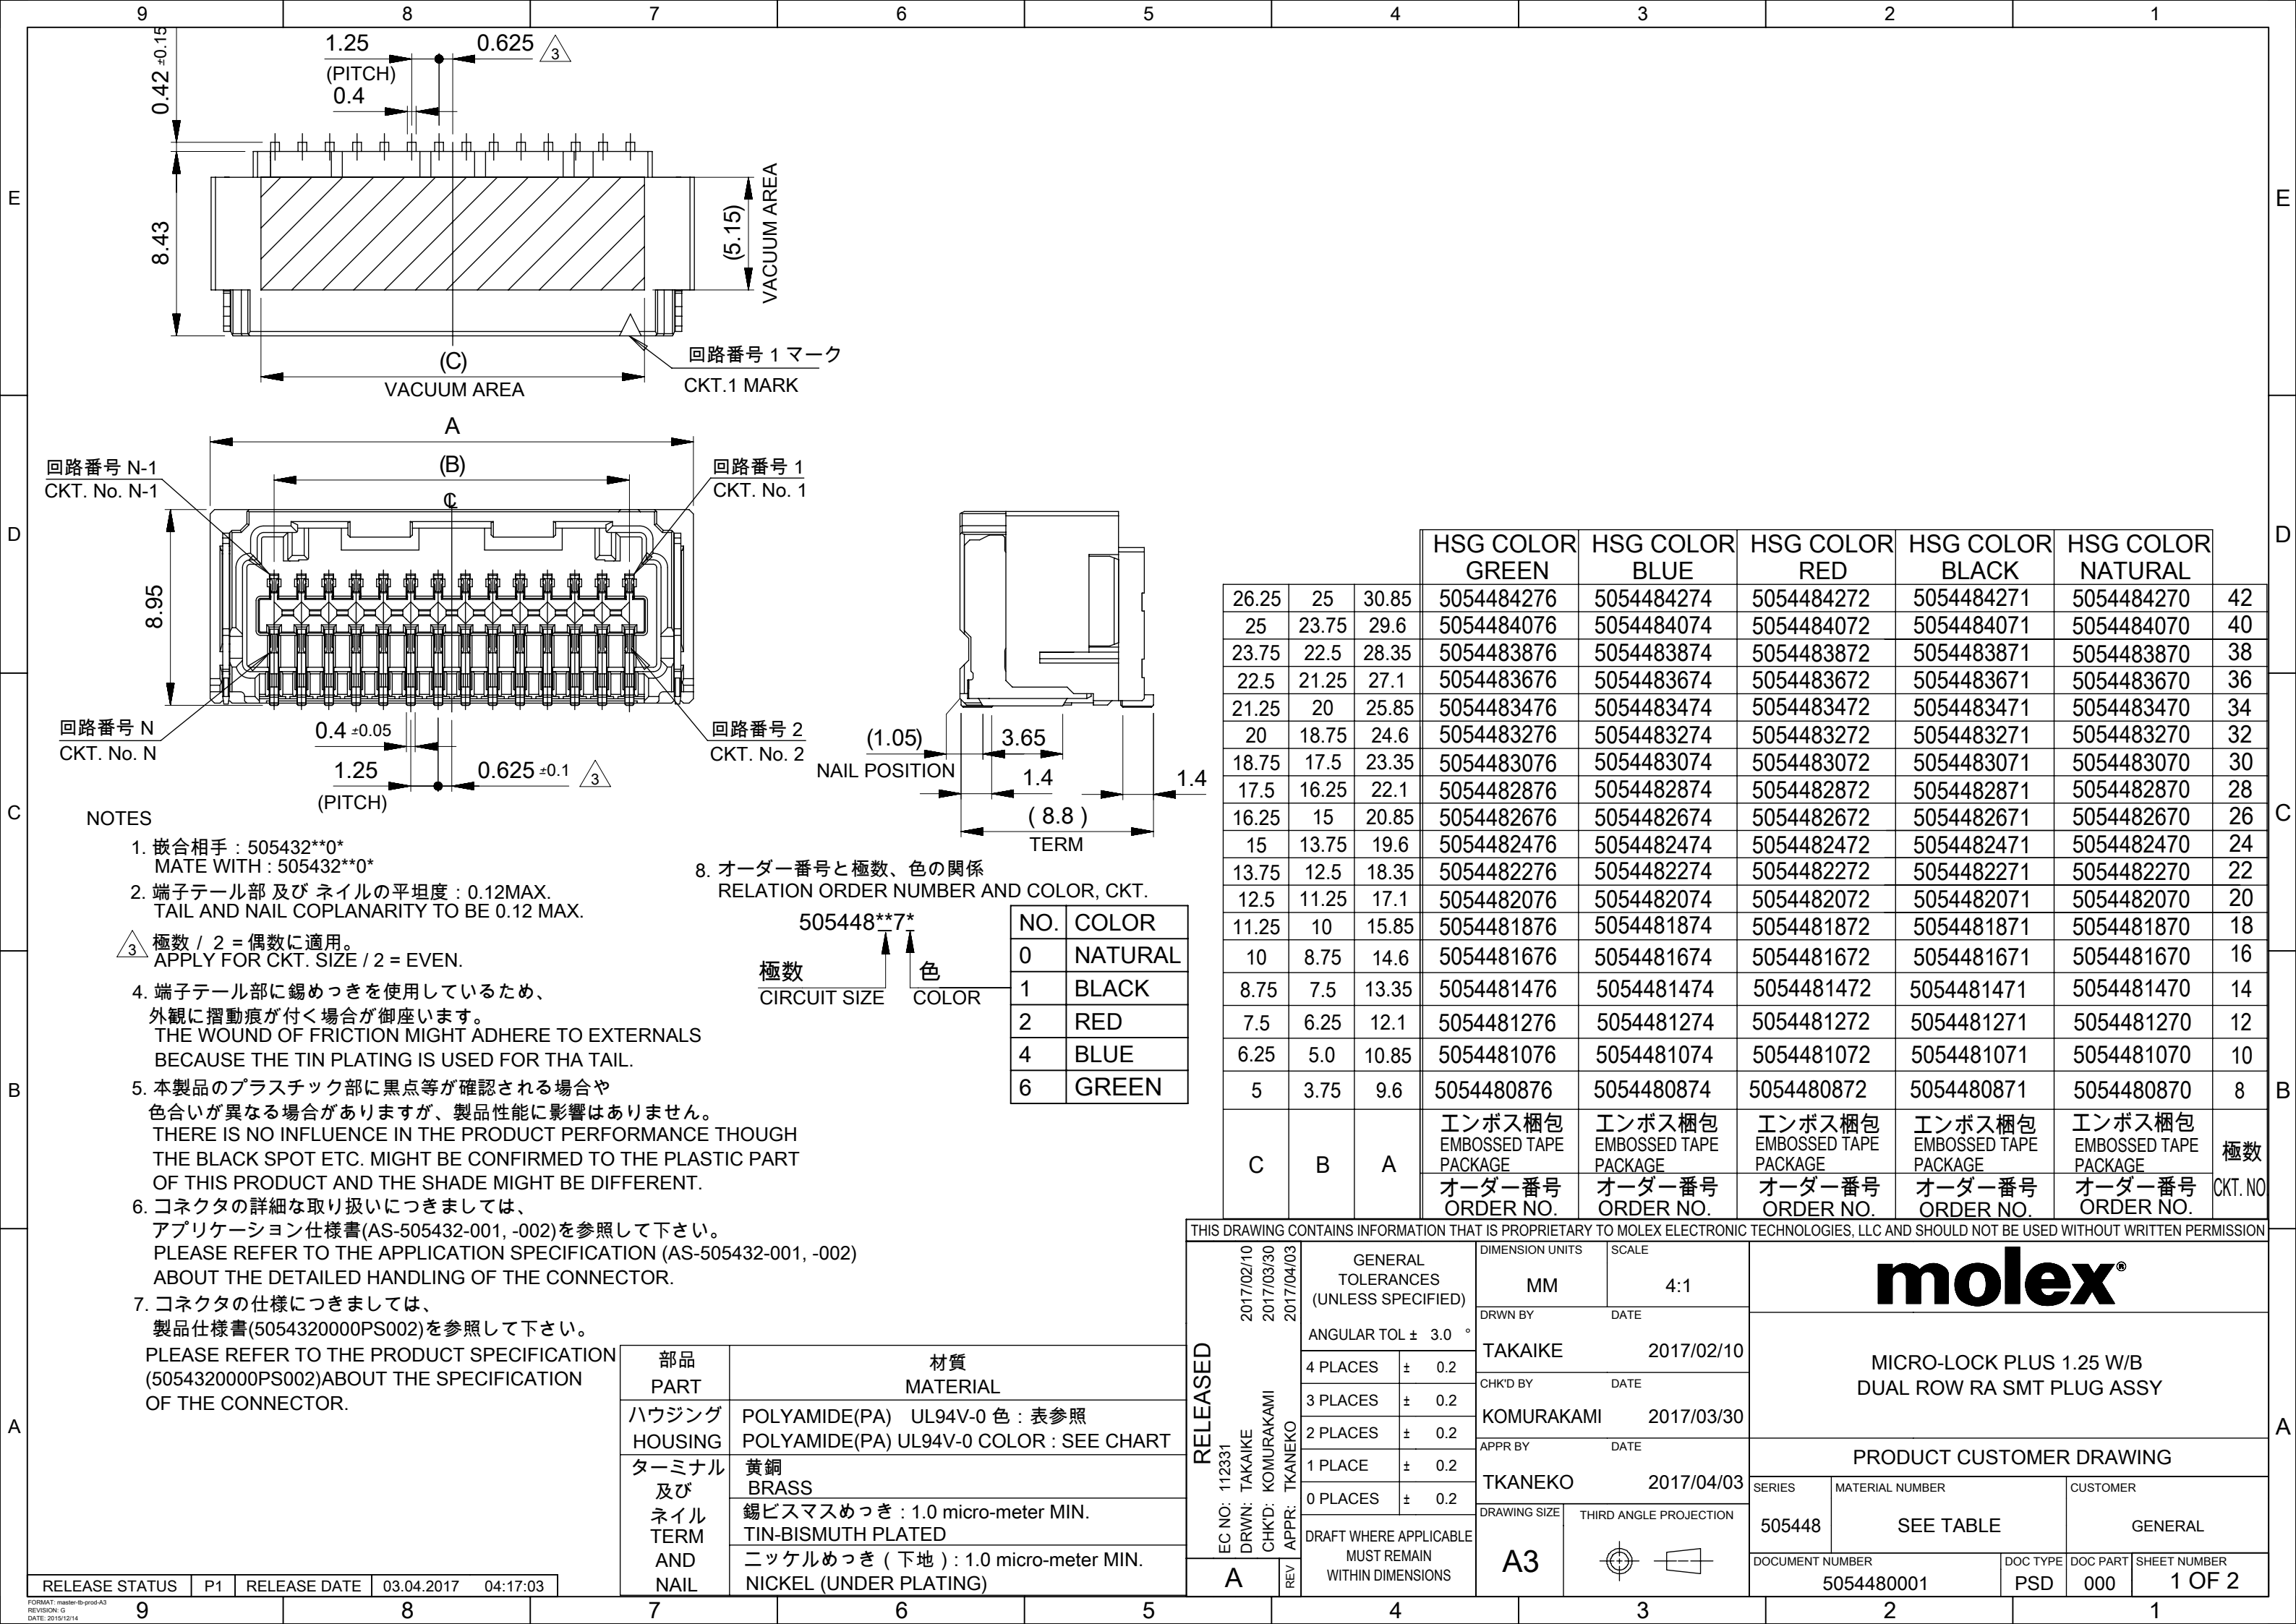




8-24CKT. 係止形状
LOCK SHAPE OF 8-24CKT.

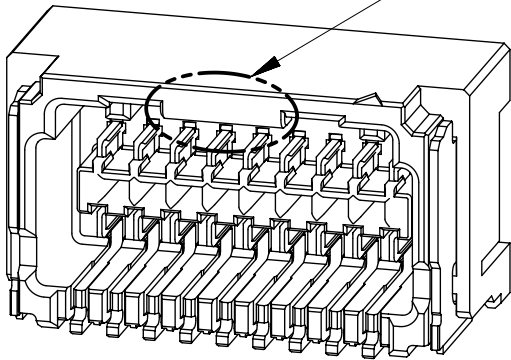


26-32CKT. 係止形状
LOCK SHAPE OF 26-32CKT.

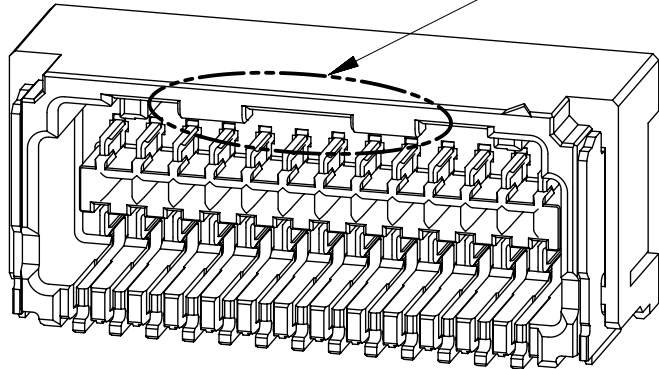

34-42CKT. 係止形状
LOCK SHAPE OF 34-42CKT.

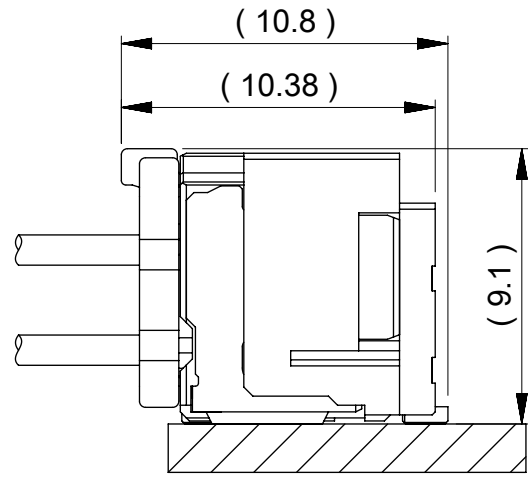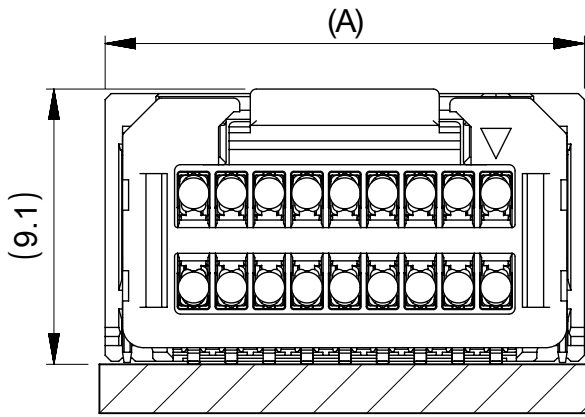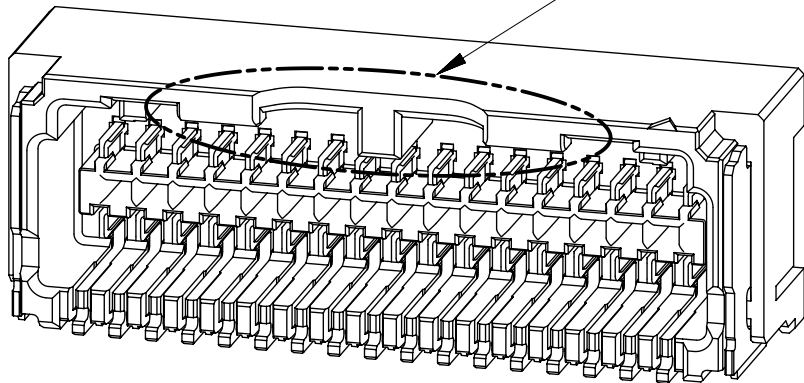


嵌合状態図
MATED CONNECTORS

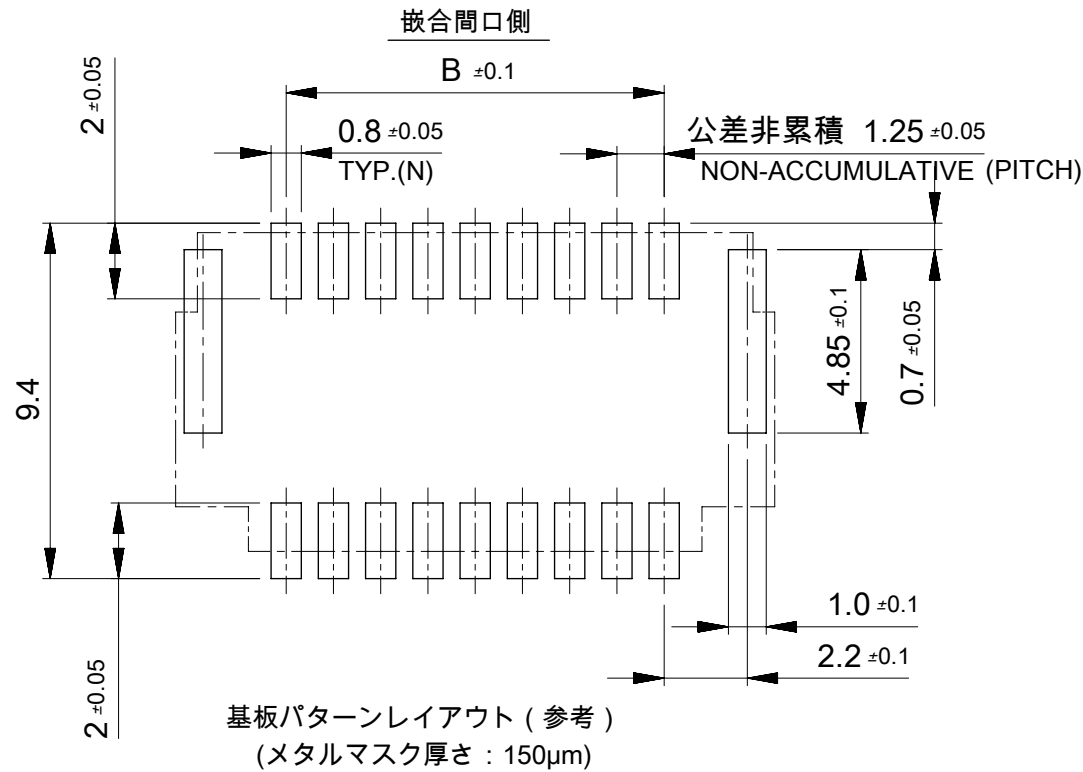

RECCOMENDED P.C.B. PATTERN LAYOUT (REF.)
(METAL MASK THICKNESS : $150\mu\text{m}$)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

RELEASED	EC NO: 112331 DRWN: TAKAIKE CHK'D: KOMURAKAMI APPR: TKANEKO	2017/02/10 2017/03/30 2017/04/03	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE	molex®					
			ANGULAR TOL ± 3.0 °		MM	4:1						
			4 PLACES	± 0.2	DRWN BY		DATE		MICRO-LOCK PLUS 1.25 W/B DUAL ROW RA SMT PLUG ASSY			
			3 PLACES	± 0.2	TAKAIKE		2017/02/10					
			2 PLACES	± 0.2	CHK'D BY		DATE		PRODUCT CUSTOMER DRAWING			
			1 PLACE	± 0.2	KOMURAKAMI		2017/03/30					
	0 PLACES	± 0.2	APPR BY		DATE		SERIES 505448					
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		TKANEKO		2017/04/03						MATERIAL NUMBER SEE TABLE	
	A	REV	DRAWING SIZE		THIRD ANGLE PROJECTION		DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER	
			A3		5054480001		PSD	000	2 OF 2			