

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0151320600

Status:


Active

Overview:

Pico-Lock Connector System

Description:

Pico-Lock-to-Pico-Lock Off-the-Shelf (OTS) Cable Assembly, 1.50mm Pitch, Single Row, 50.00mm Length, 6 Circuits, Black

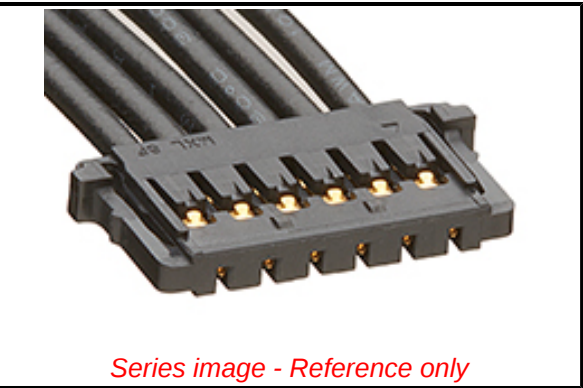

Documents:

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

[Product Literature \(PDF\)](#)

|                                |                                |
|--------------------------------|--------------------------------|
| General                        |                                |
| Product Family                 | Cable Assemblies               |
| Series                         | 15132                          |
| Assembly Configuration         | Dual Ended Connectors          |
| Connector to Connector         | Pico-Lock-to-Pico-Lock         |
| Overmolded                     | No                             |
| Overview                       | Pico-Lock Connector System     |
| Product Literature Order No    | 987651-6143                    |
| Product Name                   | Pico-Lock OTS                  |
| UPC                            | 191128285032                   |
| Physical                       |                                |
| Cable Length                   | 50.00mm                        |
| Circuits (Loaded)              | 6                              |
| Color - Resin                  | Black                          |
| Gender                         | Female-Female                  |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Copper Alloy                   |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 1.452/g                        |
| Pitch - Mating Interface       | 1.50mm                         |
| Single Ended                   | No                             |
| Termination Interface: Style   | Crimp or Compression           |
| Wire Insulation Diameter       | 1.10mm                         |
| Wire Size AWG                  | 24                             |
| Wire/Cable Type                | UL 1061                        |
| Electrical                     |                                |
| Voltage - Maximum              | 150V                           |
| Material Info                  |                                |
| Reference - Drawing Numbers    |                                |
| Sales Drawing                  | 151320600-000                  |

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/61/2018 (27 June

2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

15132 Series

Mates With

504050 Pico-Lock SMT Wire-to-Board Header

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION