

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [2119420003](#)  
**Status:** **Active**  
**Overview:** Coeur CST High-Current Interconnect System  
**Description:** Coeur CST High-Current 6.00mm Receptacle Crimp Housing, Dual Row, 2 Circuits, Keying Option B, Blue

**Documents:**

|   |   |
|---|---|
| <a href="#">3D Model</a>                                      | <a href="#">Application Specification 2119410000-AS-000 (PDF)</a> |
| <a href="#">3D Model (PDF)</a>                                | <a href="#">Packaging Specification 2119420000-PK-000 (PDF)</a>   |
| <a href="#">Drawing (PDF)</a>                                 | <a href="#">Test Summary 2119410000-TS-000 (PDF)</a>              |
| <a href="#">Product Specification 2119410000-PS-000 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>              |

**General**

|                |  |
|----------------|--|
| Product Family | Crimp Housings   |
| Series         | <a href="#">211942</a>                                     |
| Application    | Power, Wire-to-Board                                       |
| Overview       | <a href="#">Coeur CST High-Current Interconnect System</a> |
| Product Name   | Coeur CST  |
| UPC            | 191130961382   |


**Physical**

|                               |                |
|-------------------------------|----------------|
| Circuits (maximum)            | 2              |
| Color - Resin                 | Blue           |
| Gender                        | Receptacle     |
| Glow-Wire Capable             | No             |
| Keying to Mating Part         | Yes            |
| Lock to Mating Part           | Yes            |
| Material - Resin              | Polyester      |
| Net Weight                    | 18.323/g       |
| Number of Rows                | 2              |
| Packaging Type                | Bag            |
| Panel Mount                   | N/A            |
| Pitch - Mating Interface      | 19.06mm        |
| Polarized to Mating Part      | Yes            |
| Temperature Range - Operating | -40° to +105°C |

**Material Info**

**Reference - Drawing Numbers**

|                           |                   |
|---------------------------|-------------------|
| Application Specification | 2119410000-AS-000 |
| Packaging Specification   | 2119420000-PK-000 |
| Product Specification     | 2119410000-PS-000 |
| Sales Drawing             | 2119420000-SD-000 |
| Test Summary              | 2119410000-TS-000 |

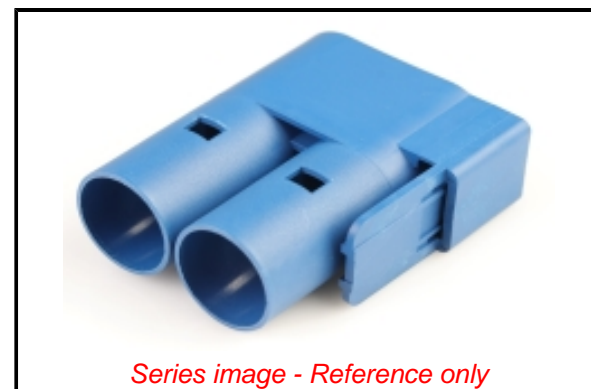

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)4578-DC (25  
June 2020)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[211942](#) Series

**Mates With**

6.00mm Male Header [211937](#)

**Use With**

6.00mm Female Crimp Socket [204608](#)  
<br> 6.00mm Terminal Retention Housing  
[211888](#)