
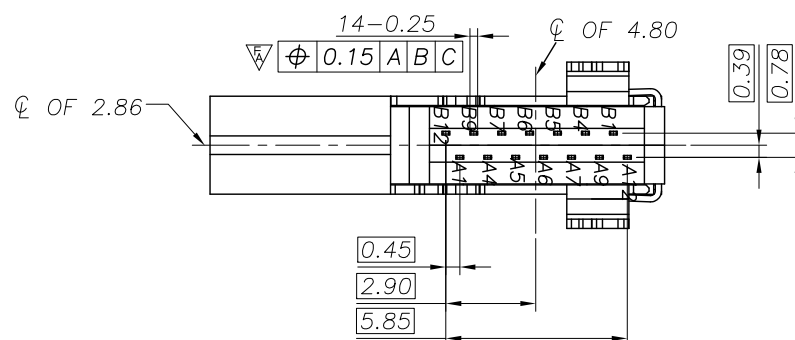
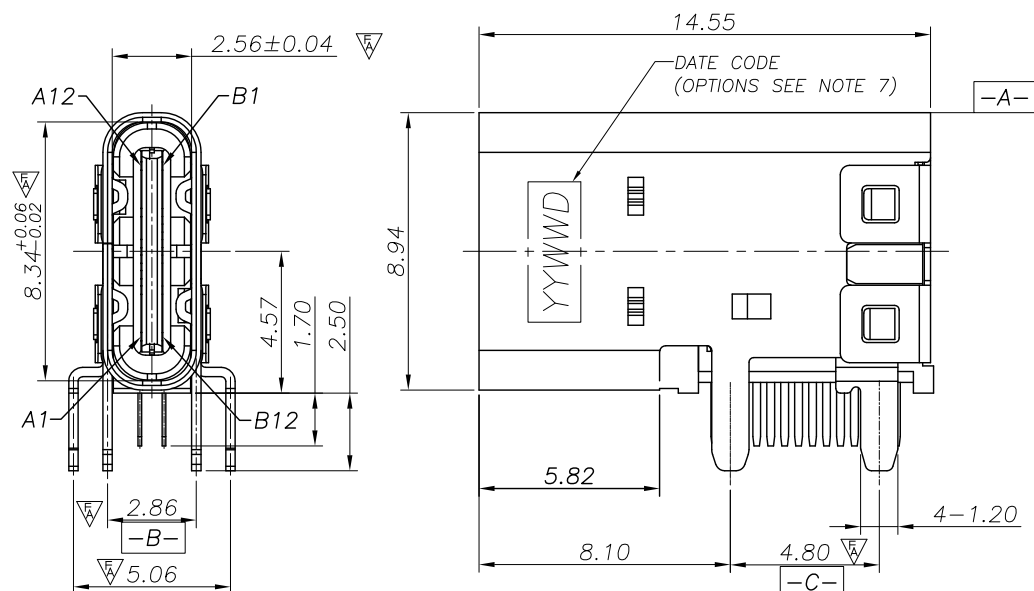



7. DATE CODE:YY WW D

- DAY
- WEEK
- YEAR




PART NO.	PLATING DESCRIPTION
2169890002	SEE NOTE 2(1) FOR CONTACT AREA

SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex USB TYPE C UPRIGHT STRAIGHT TAB 14 PIN PRODUCT CUSTOMER DRAWING				
	mm		1:1										
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: DRWN:JAY 2020/09/10 CHK'D:HAO 2020/09/10 APPR:Peak 2020/09/10										
	ANGULAR TOL ± 3°		INITIAL REVISION: DRWN:JAY 2020/06/08 APPR:Peak 2020/06/08		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION		
	4 PLACES ±				2169890002		PSD		000		A		
	3 PLACES ± 0.10												
	2 PLACES ± 0.20												
	1 PLACE ± 0.30												
	0 PLACES ±												
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
				A3-SIZE		216989		SEE SHEET1				1 OF 2	

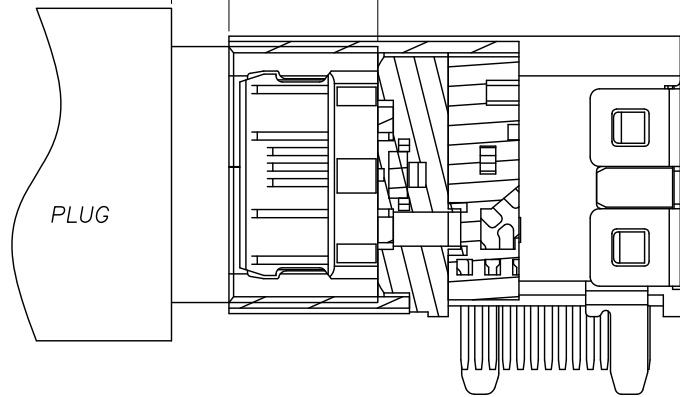

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

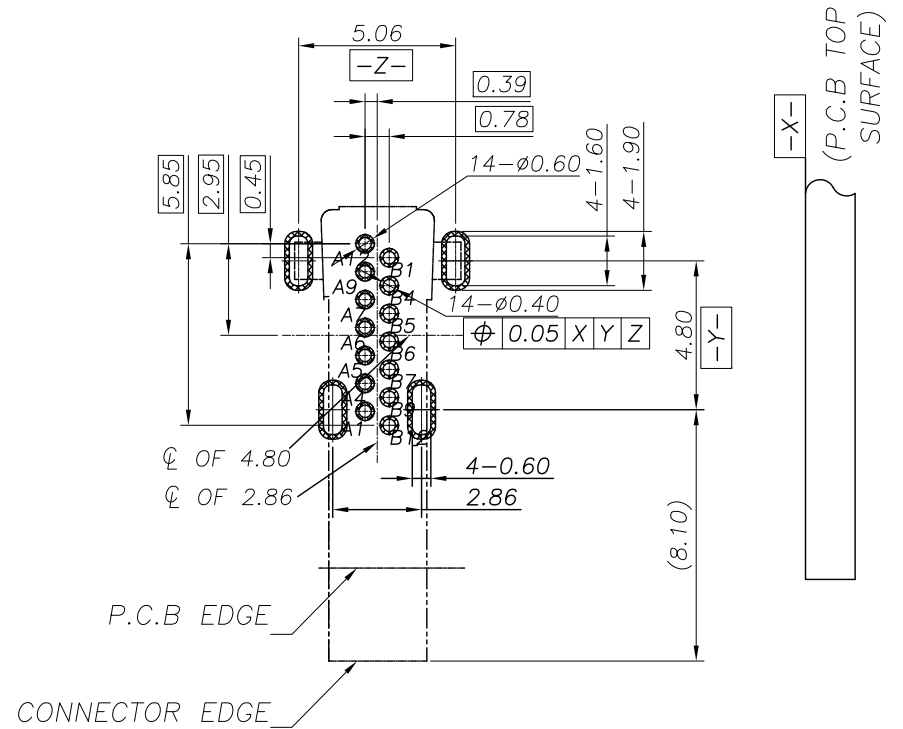

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.20 MM;DEFAULT TOLERANCE:±0.05

SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC:						molex					
▽ = 6 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 □ = 0 ■ = 0 ▽ = 0		mm		1:1													
		GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO:		USB TYPE C UPRIGHT STRAIGHT TAB 14 PIN											
		ANGULAR TOL : 3°		DRWN:JAY 2020/09/10													
		4 PLACES ±		CHK'D:HAO 2020/09/10		PRODUCT CUSTOMER DRAWING											
		3 PLACES ± 0.10		APPR:Peak 2020/09/10													
		2 PLACES ± 0.20		INITIAL REVISION:		DOCUMENT NUMBER						DOC TYPE		DOC PART		REVISION	
		1 PLACE ± 0.30		DRWN:JAY 2020/06/08													
		0 PLACES ±		APPR:Peak 2020/06/08		2169890002						PSD		000		A1	
		DRAFT WHERE APPLICABLE MUST REMAIN WITH IN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
						A3-SIZE		216989		SEE SHEET1				2 OF 2			