
Part Number : 190170041
Product Description : InsulKrimp Quick Disconnect, Female, for 14-16 (2.00-1.30mm^2) Wire, Mylar Tape, Tab 6.35 x 0.81mm
Series Number : 19017
Status : Active
Product Category : Quick Disconnects
Engineering Number : BB-2141T

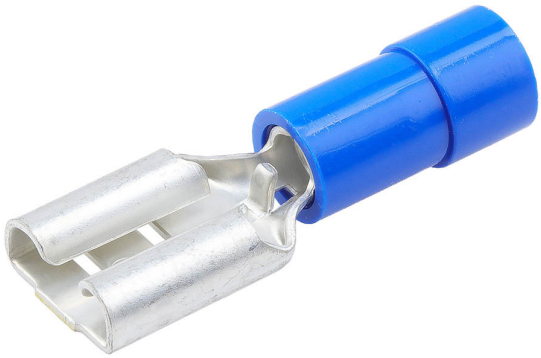

Documents & Resources

Drawings
190170041_sd.pdf

3D Models and Design Files
190170041_stp.zip

Specifications
PS-19902-008-001.pdf
PS-19902-011-001.pdf
PS-19902-015-001.pdf

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements
- Eu RoHS
- REACH SVHC

- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Quick Disconnects
Series	19017
Description	InsulKrimp Quick Disconnect, Female, for 14-16 (2.00-1.30mm^2) Wire, Mylar Tape, Tab 6.35 x 0.81mm
Product Name	InsulKrimp
Type	Quick Disconnect
UPC	800753036222

Agency

CSA	LR18689
UL	E79133

Electrical

Voltage - Maximum	600V

Physical

Barrel Type	Closed
Color - Resin	Blue
Flammability	94V-0
Gender	Female
Glow-Wire Capable	No
Insulated	Partial

Insulation	PVC
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.778/g
Orientation	Straight
Packaging Type	Adhesive Tape on Reel
Polarized to Mating Part	No
Tab Thickness	0.81mm
Tab Width	6.35mm
Temperature Range - Operating	-50° to +105°C
Wire Insulation Diameter	3.70mm max.
Wire Size (AWG)	14, 16
Wire Size mm^2	1.30-2.00

Solder Process Data

Lead-Free Process Capability	N/A

Application Tooling

Global

Description	Part Number
ATP Crimp Dies for the Tape Crimp Module and ATP-101 & 301 Press	192880104
Mini-Mac Applicator	638854200