


MATERIAL: Copper
 PLATING: Electro-Tin (.0003 Min.)
 INSULATION: PVC Color Coded Blue
 STUD SIZES: "D" $\pm .005$

INSULKRIMP X


Optional Configuration

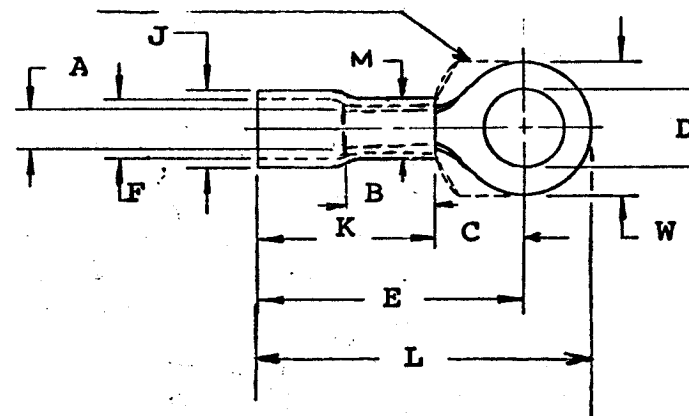

"M" - .435" Maximum

Part Number	"W"	"C" Min.	"E" Max.	"K" Max.	"L" Max.	"A" Min.Avg.	"F" (MWID)	Stock Thickness	"J" Max.	"B" Min.	Available Stud Size
E-657X	.638 .622	.511	1.382	.828	1.667	.222	.440	.057	.520	.340	08, 10, 14, 56, 38, 76
E-658X	.820 .804	.603	1.474	.828	1.874	.222	.440	.057	.520	.340	10, 14, 56, 38, 76, 12, 58
E-659X	1.128 1.114	.984	1.855	.828	2.405	.222	.440	.057	.520	.340	14, 56, 38, 76 12, 58, 34
E-660-X	.485 .455	.511	1.382	.828	1.596	.222	.440	.057	.520	.340	08, 10, 14, 56

NOTE: (MWID) denotes maximum wire insulation diameter.



INCORPORATED
 CLEVELAND, OHIO

TITLE: CUSTOMER DRAWING
 #6 WIRE RANGE (E)
 RING
 TONGUE TERMINAL

DIMENSIONAL TOLERANCE
 UNLESS OTHERWISE SPECIFIED

FRAC.	DEC.	ANG.
$\pm$	$\pm$	$\pm$

REVISION	SCALE: _____	DATE
	DRWN. BY: JTK	1-21-70
	CHKD. BY: _____	
	APPRD. BY: _____	
	DRAWING NO.:	