

Molex.com

English  
日本語  
한국어  
简体中文

Register | Login  
My Parts ( 0 items )

Product Name

Cross-Ref

Catalog

Literature

Industries

Standards

Contact Us

About Us

Investors

Careers

Search site:Search:  [Go](#)

Connectors

Sockets

I/O Connectors

Cable Assemblies

Fiber Optics

Printed Circuit Products

Industrial Products

Lighting Products

Switch Language

English

[Home](#)  
[Crimp Housings](#)  
[Datasheet](#)

Need Assistance?

Contact Us  
Find a Distributor  
Order Samples  
Tech Library  
Ecocare  
Electrical Models

Printer-friendly page

Email this page

Part Number:

0022012125

Status:

Active

Overview:

KK®

Description:


2.54mm (.100") Pitch KK® Crimp Terminal Housing, Friction Ramp, 12 Circuits, Use with 4809

Documents:

Note - Please disable browser pop-up blockers for documents on www.molex.com

[Drawing \(PDF\)](#)

[Product Specification PS-10-07 \(PDF\)](#)

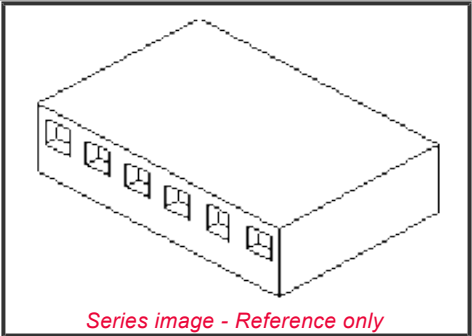

**EU RoHS**  
ELV and RoHS  
Compliant

**REACH SVHC**  
Not Reviewed

**Halogen-Free**  
Status  
Halogen-Free



Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[6471](#)Series

Mates With

2.54mm (.100") Pitch KK ® PCB Headers

Use With

[4809](#) KK® Crimp Terminal

[Product Specification PS-99020-0088 \(PDF\)](#) [3D M](#)

Order Products:

Part Detail: [\(show all\)](#)

[General](#)[Physical](#)[Agency Certification](#)[Solder Process Data](#)[Material Info](#)[Reference - Drawing Numbers](#)

General

Product Family	Crimp Housings
Series	<a href="#">6471</a>
Overview	<a href="#">KK®</a>
Product Name	KK®

Physical

Circuits (maximum)	12
Color - Resin	Natural (White)
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	0°C to +75°C

Agency Certification

CSA	LR19880
UL	E29179

Solder Process Data

Lead-free Process Capability	Wave Capable (TH only)
------------------------------	------------------------

Material Info

Old Part Number	6471-12(I)
-----------------	------------

Reference - Drawing Numbers

Product Specification	PS-10-07, PS-99020-0088
Sales Drawing	SD-6471-N*~**, SDE-6471-N*~*